

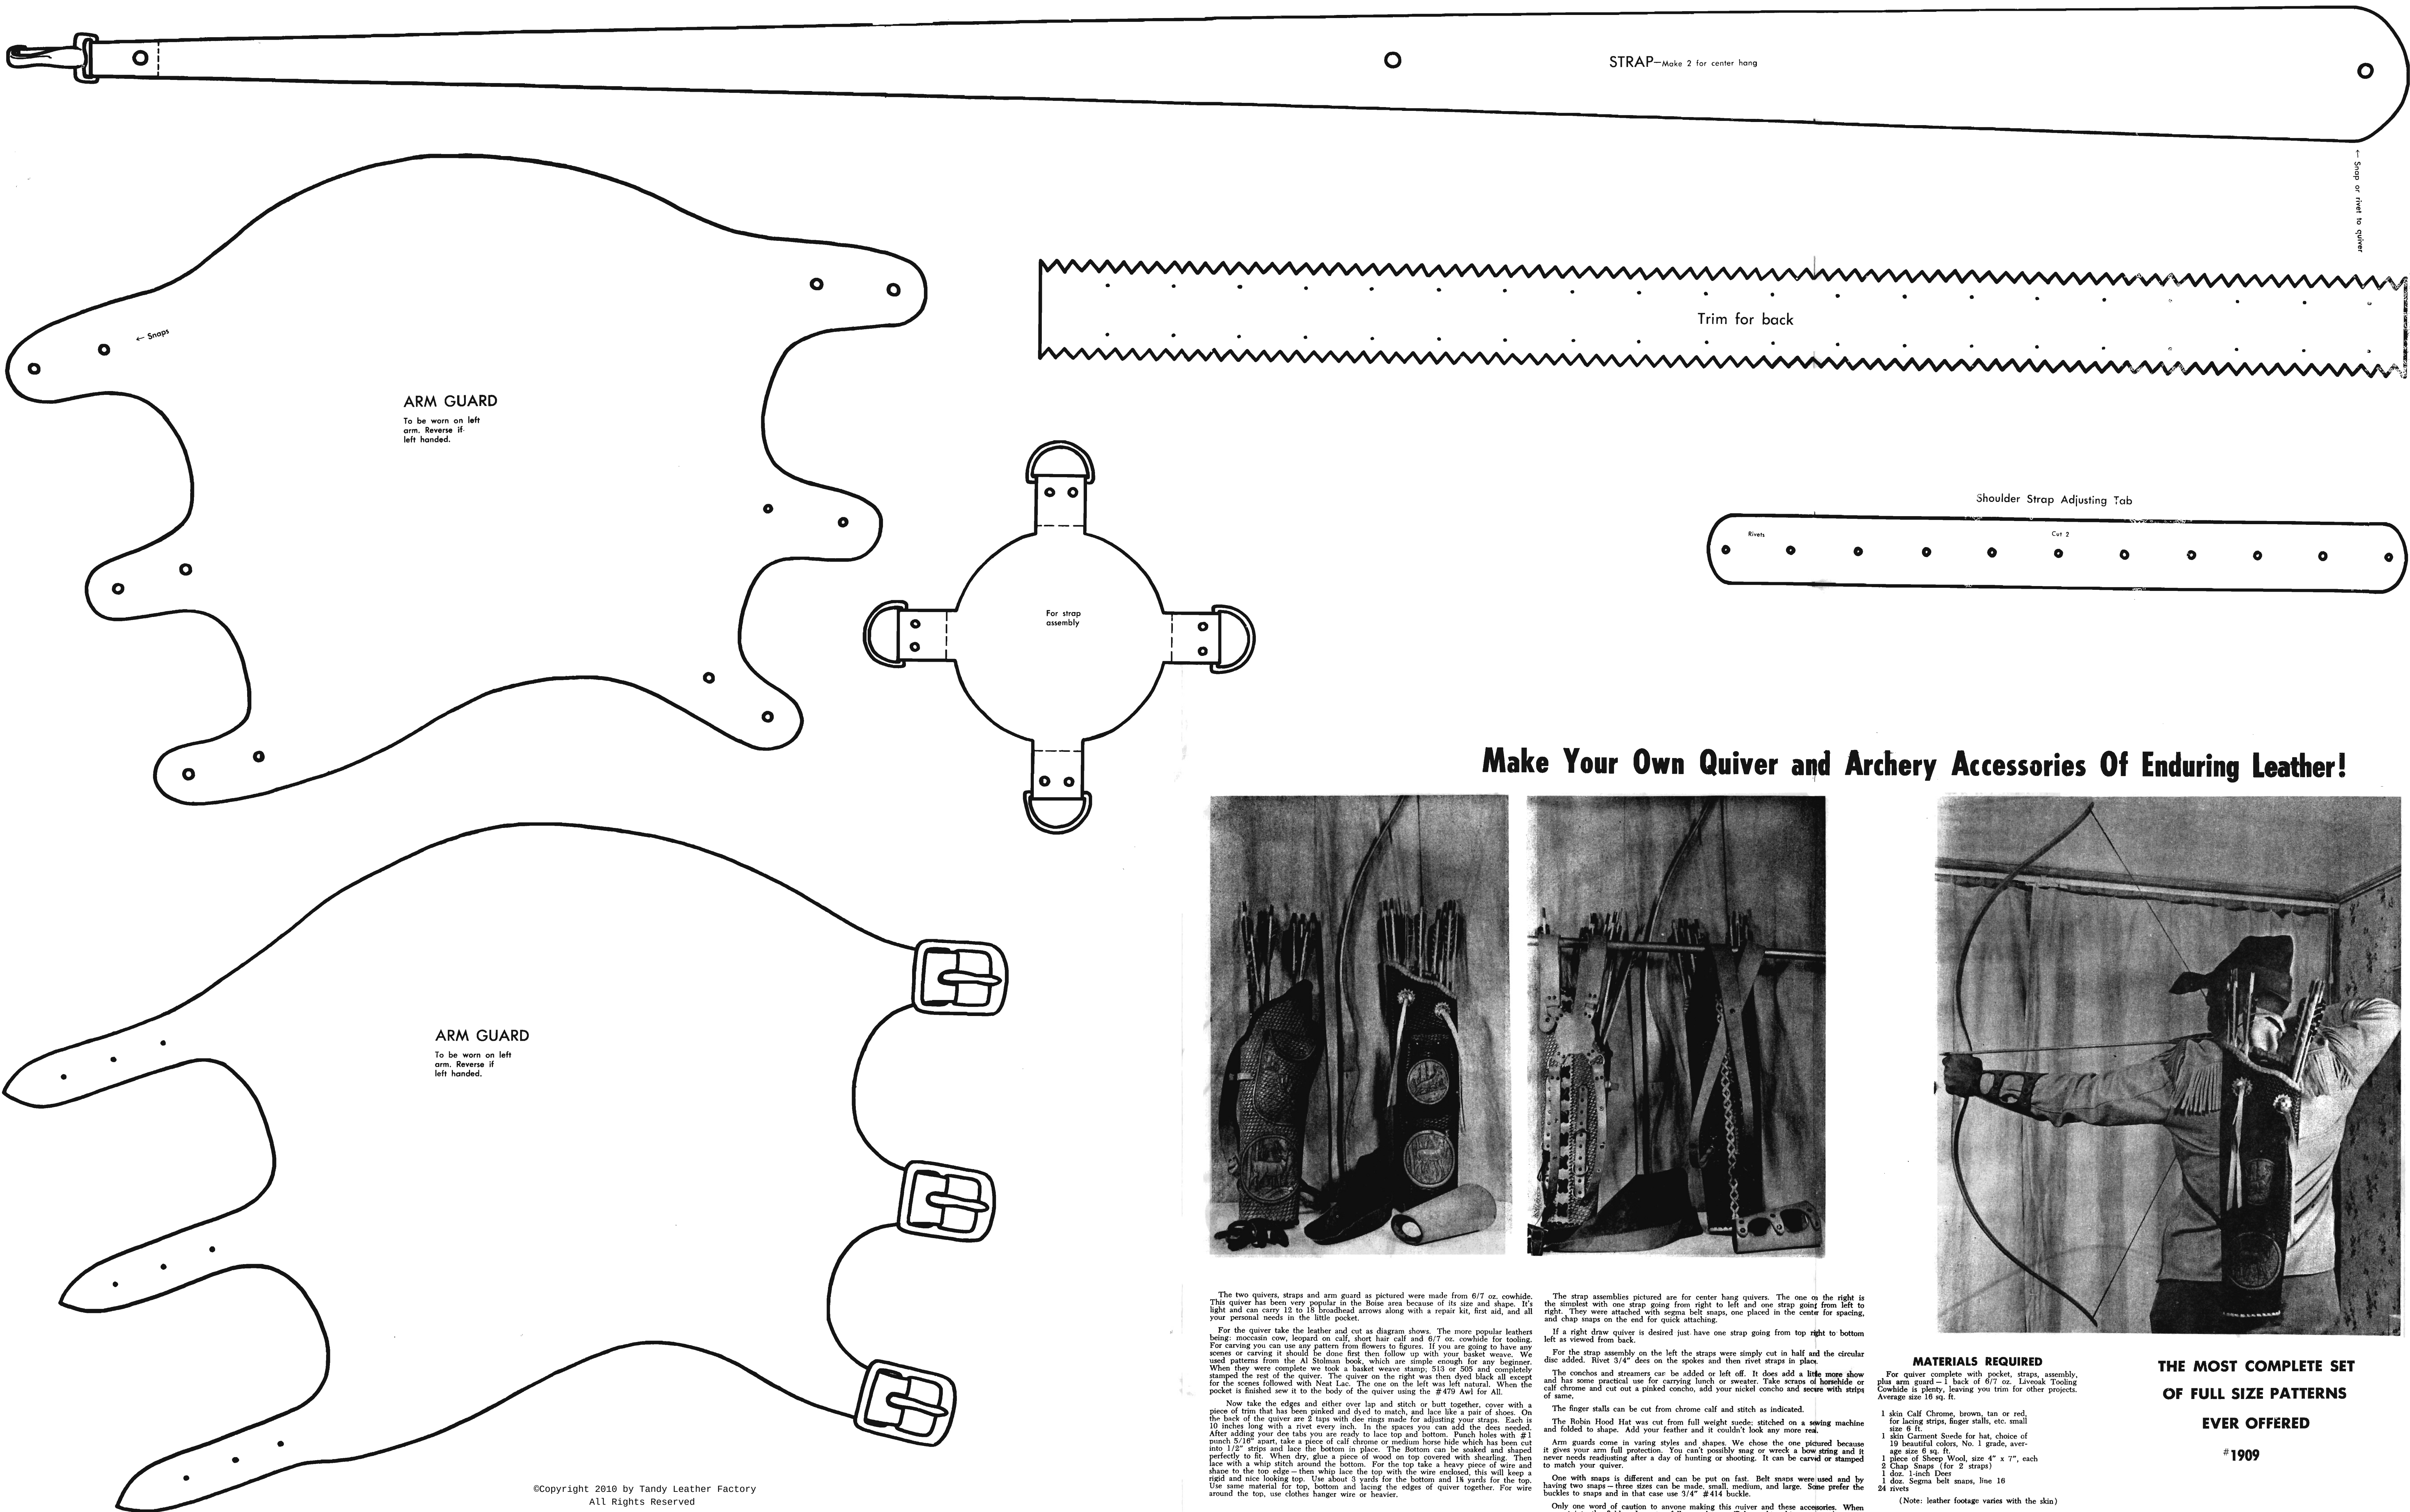
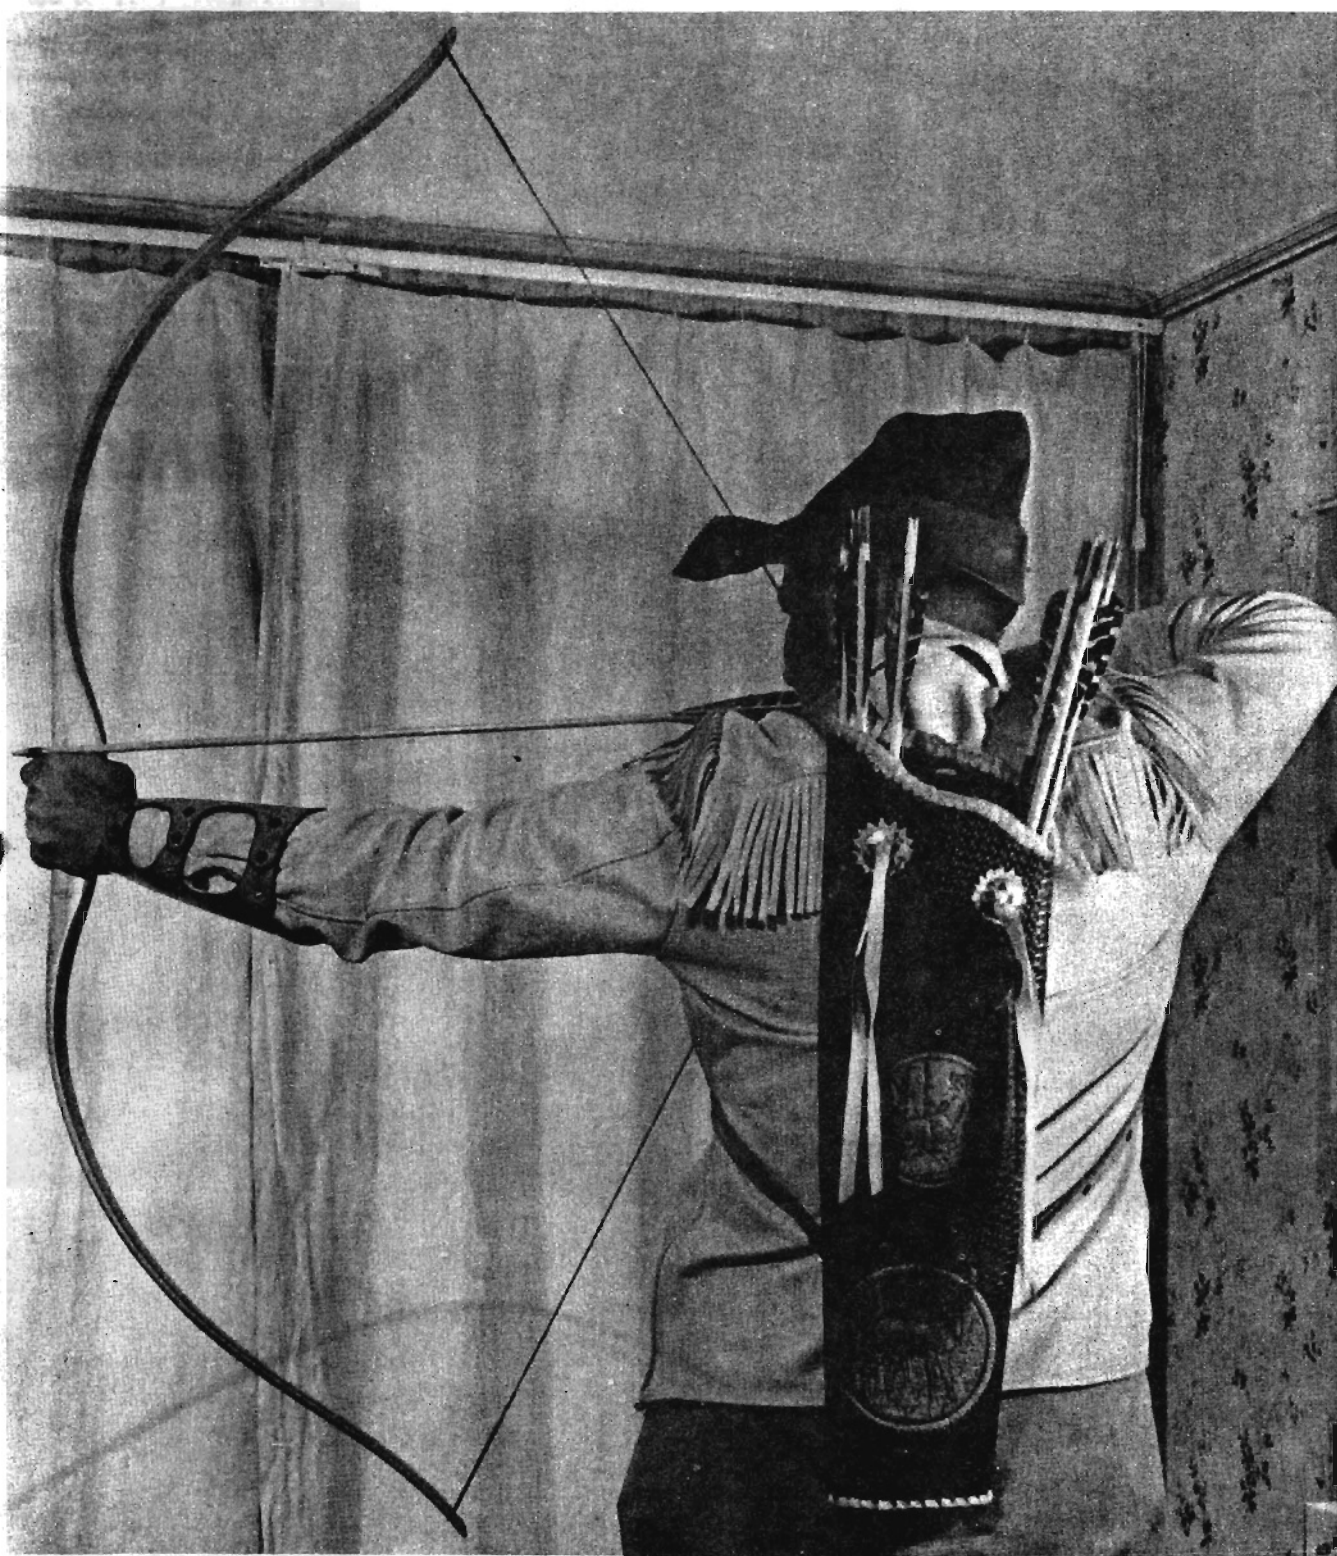


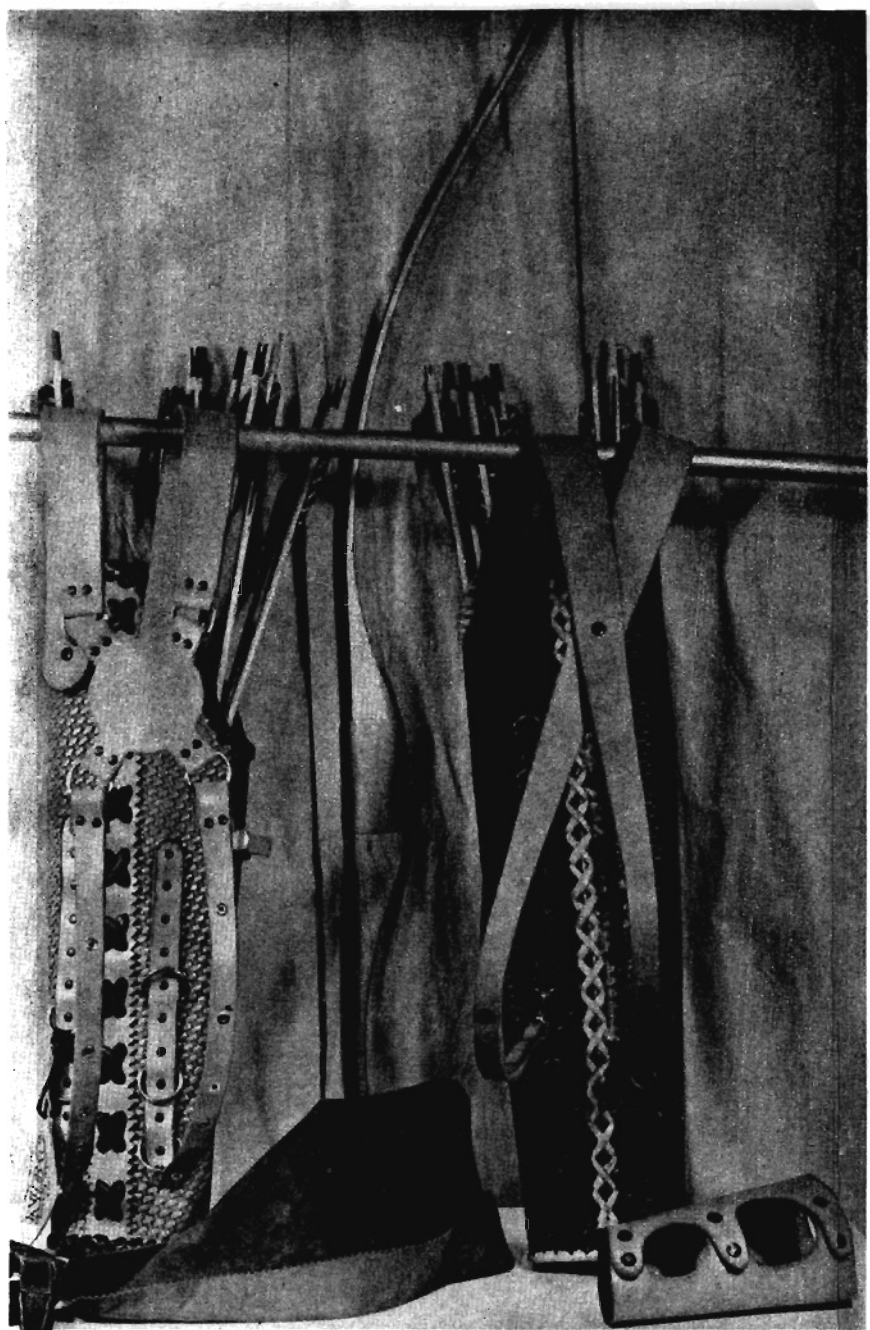

Make Your Own Quiver and Archery Accessories Of Enduring Leather!

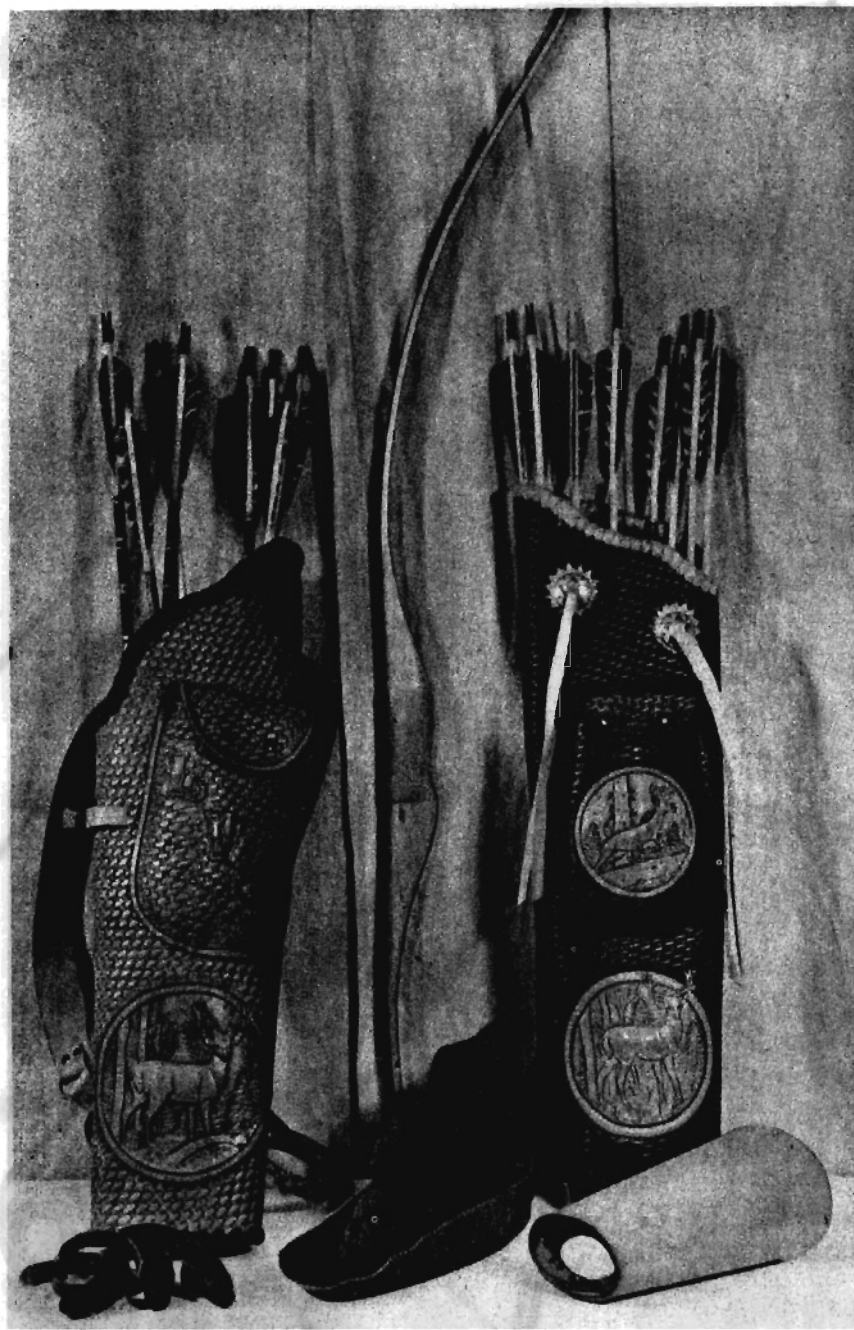

The two quivers, straps and arm guard as pictured were made from 6/7 oz. cowhide. This quiver has been very popular in the Boise area because of its size and shape. It's light and can carry 12 to 18 broadhead arrows along with a repair kit, first aid, and all your personal needs in the little pocket.

For the quiver take the leather and cut as diagram shows. The more popular leathers being: moccasin cow, leopard on calf, short hair calf and 6/7 oz. cowhide for tooling. For carving you can use any pattern from flowers to figures. If you are going to have any scenes or carving it should be done first then follow up with your basket weave. We used patterns from the Al Stinson book, which are simple enough for any beginner. When they were complete we took a basket weave stamp, #15 or 200, and completely stamped the rest of the quiver. The quiver on the right was then dyed black all except for the scenes followed with Neat Lac. The one on the left was left natural. When the pocket is finished sew it to the body of the quiver using the #479 Awl for All.

Now take the edges and either over lap and stitch or butt together, cover with a piece of trim that has been pinked and dyed to match, and lace like a pair of shoes. On the back of the quiver are 2 taps with deer rings made for adjusting your straps. Each is 10 inches long with a rivet every inch. In the spaces you can add the deer needed. After adding your deer tabs you are ready to lace top and bottom. Punch holes with #1 punch 5/16" apart, take a piece of calf chrome or medium horse hide which has been cut into 1/2" strips and lace the bottom in place. The bottom can be soaked and shaped perfectly to fit. When dry, glue a piece of wood on top covered with shearing. Then lace with a whip stitch around the bottom. For the top take a heavy piece of wire and shape to the top edge—then whip lace the top with the wire enclosed, this will keep a rigid and nice looking top. Use about 3 yards for the bottom and 18 yards for the top. Use same material for top, bottom and lacing the edges of quiver together. For wire around the top, use clothes hanger wire or heavier.

The strap assemblies pictured are for center hang quivers. The one on the right is the simplest with one strap going from right to left and one strap going from left to right. They were attached with segma belt snaps, one placed in the center for spacing, and shap snaps on the end for quick attaching.

If a right draw quiver is desired just have one strap going from top right to bottom left as viewed from back.

For the strap assembly on the left the straps were simply cut in half and the circular disc added. Rivet 3/4" does on the spokes and then rivet straps in place.

The conchos and streamers can be added or left off. It does add a little more show and has some practical use for carrying lunch or sweater. Take scraps of horsehide or calf chrome and cut out a pinked concho, add your nickel concho and secure with strips of same.

The finger stalls can be cut from chrome calf and stitch as indicated.

The Robin Hood Hat was cut from full weight suede, stitched on a sewing machine and folded to shape. Add your feather and it couldn't look any more real.

Arm guards come in varying styles and shapes. We chose the one pictured because it gives your arm full protection. You can't possibly snag or wreck a bow strap and it never needs readjusting after a day of hunting or shooting. It can be carved or stamped to match your quiver.

One with snaps is different and can be put on fast. Belt snaps were used and by having two snaps—three sizes can be made, small, medium, and large. Some prefer the buckles to snaps and in that case use 3/4" #414 buckle.

Only one word of caution to anyone making this quiver and these accessories. When you get into the field and meet a fellow archer you'll be making him a set too!

MATERIALS REQUIRED

For quiver complete with pocket, straps, assembly, plus arm guard—1 back of 6/7 oz. Liveoak Tooling Cowhide is plenty, leaving you trim for other projects. Average size 16 sq. ft.

- 1 skin Calf Chrome, brown, tan or red for lacing strips, finger stalls, etc. small size 6 ft.
- 1 skin Garmet Suede for hat, choice of 19 beautiful colors, No. 1 grade, average size 6 sq. ft.
- 1 piece of Sheep Wool, size 4" x 7", each 2 Chap Snaps (for 2 straps)
- 1 doz. 1-inch Does
- 1 doz. Segma belt snaps, blue 16 rivets


(Note: leather footage varies with the skin)

**THE MOST COMPLETE SET
OF FULL SIZE PATTERNS
EVER OFFERED**

#1909

Distributed by Tandy Warehouse Co., Ft. Worth, Texas
Division of Tandy Corporation


#1909 ARCHERY SET PATTERN

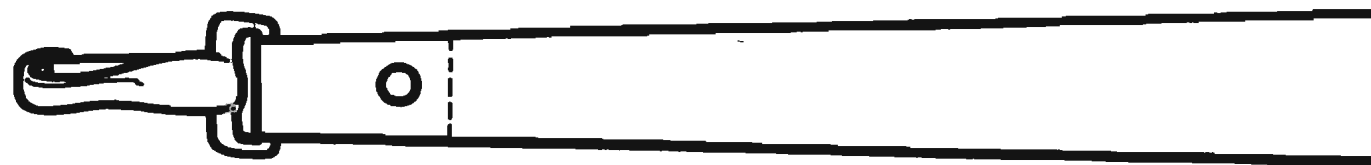




STRAP—Make 2 for center hang



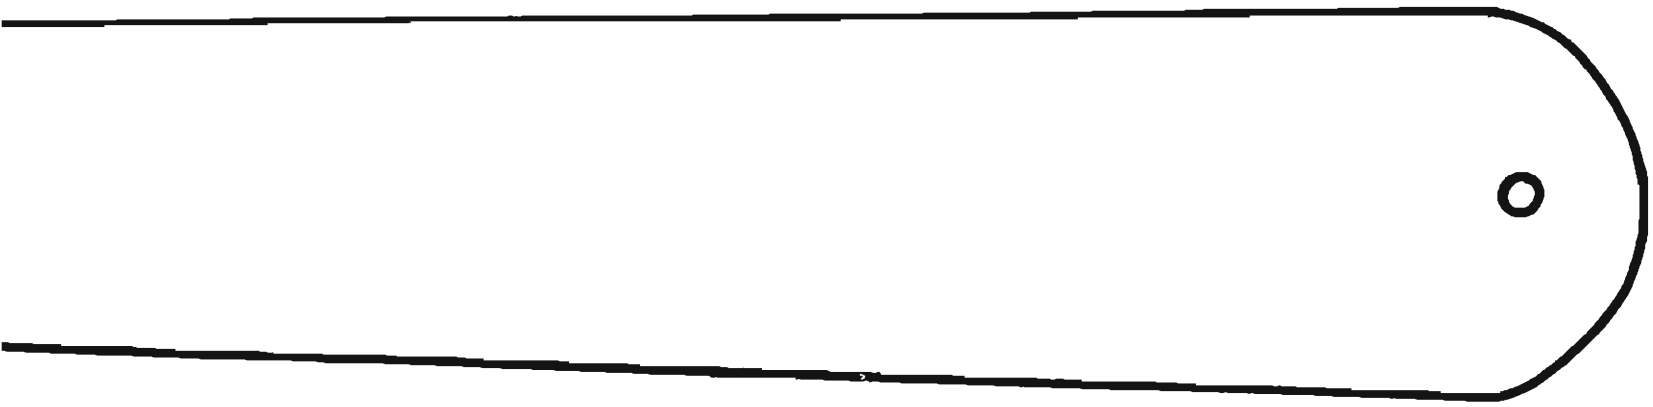


← Snap or riv

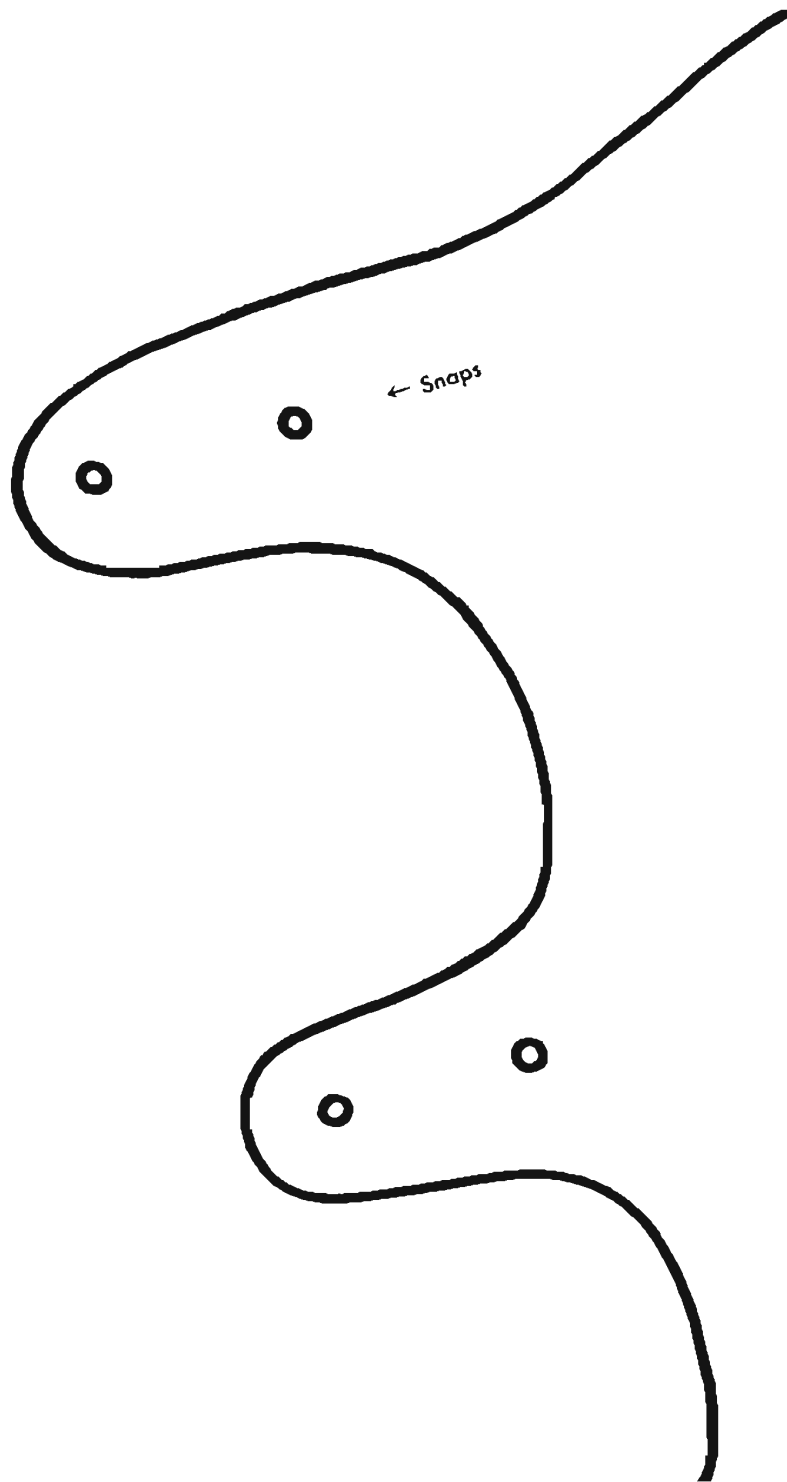

ARM GUAI

To be worn on left
arm. Reverse if
left handed.



RD

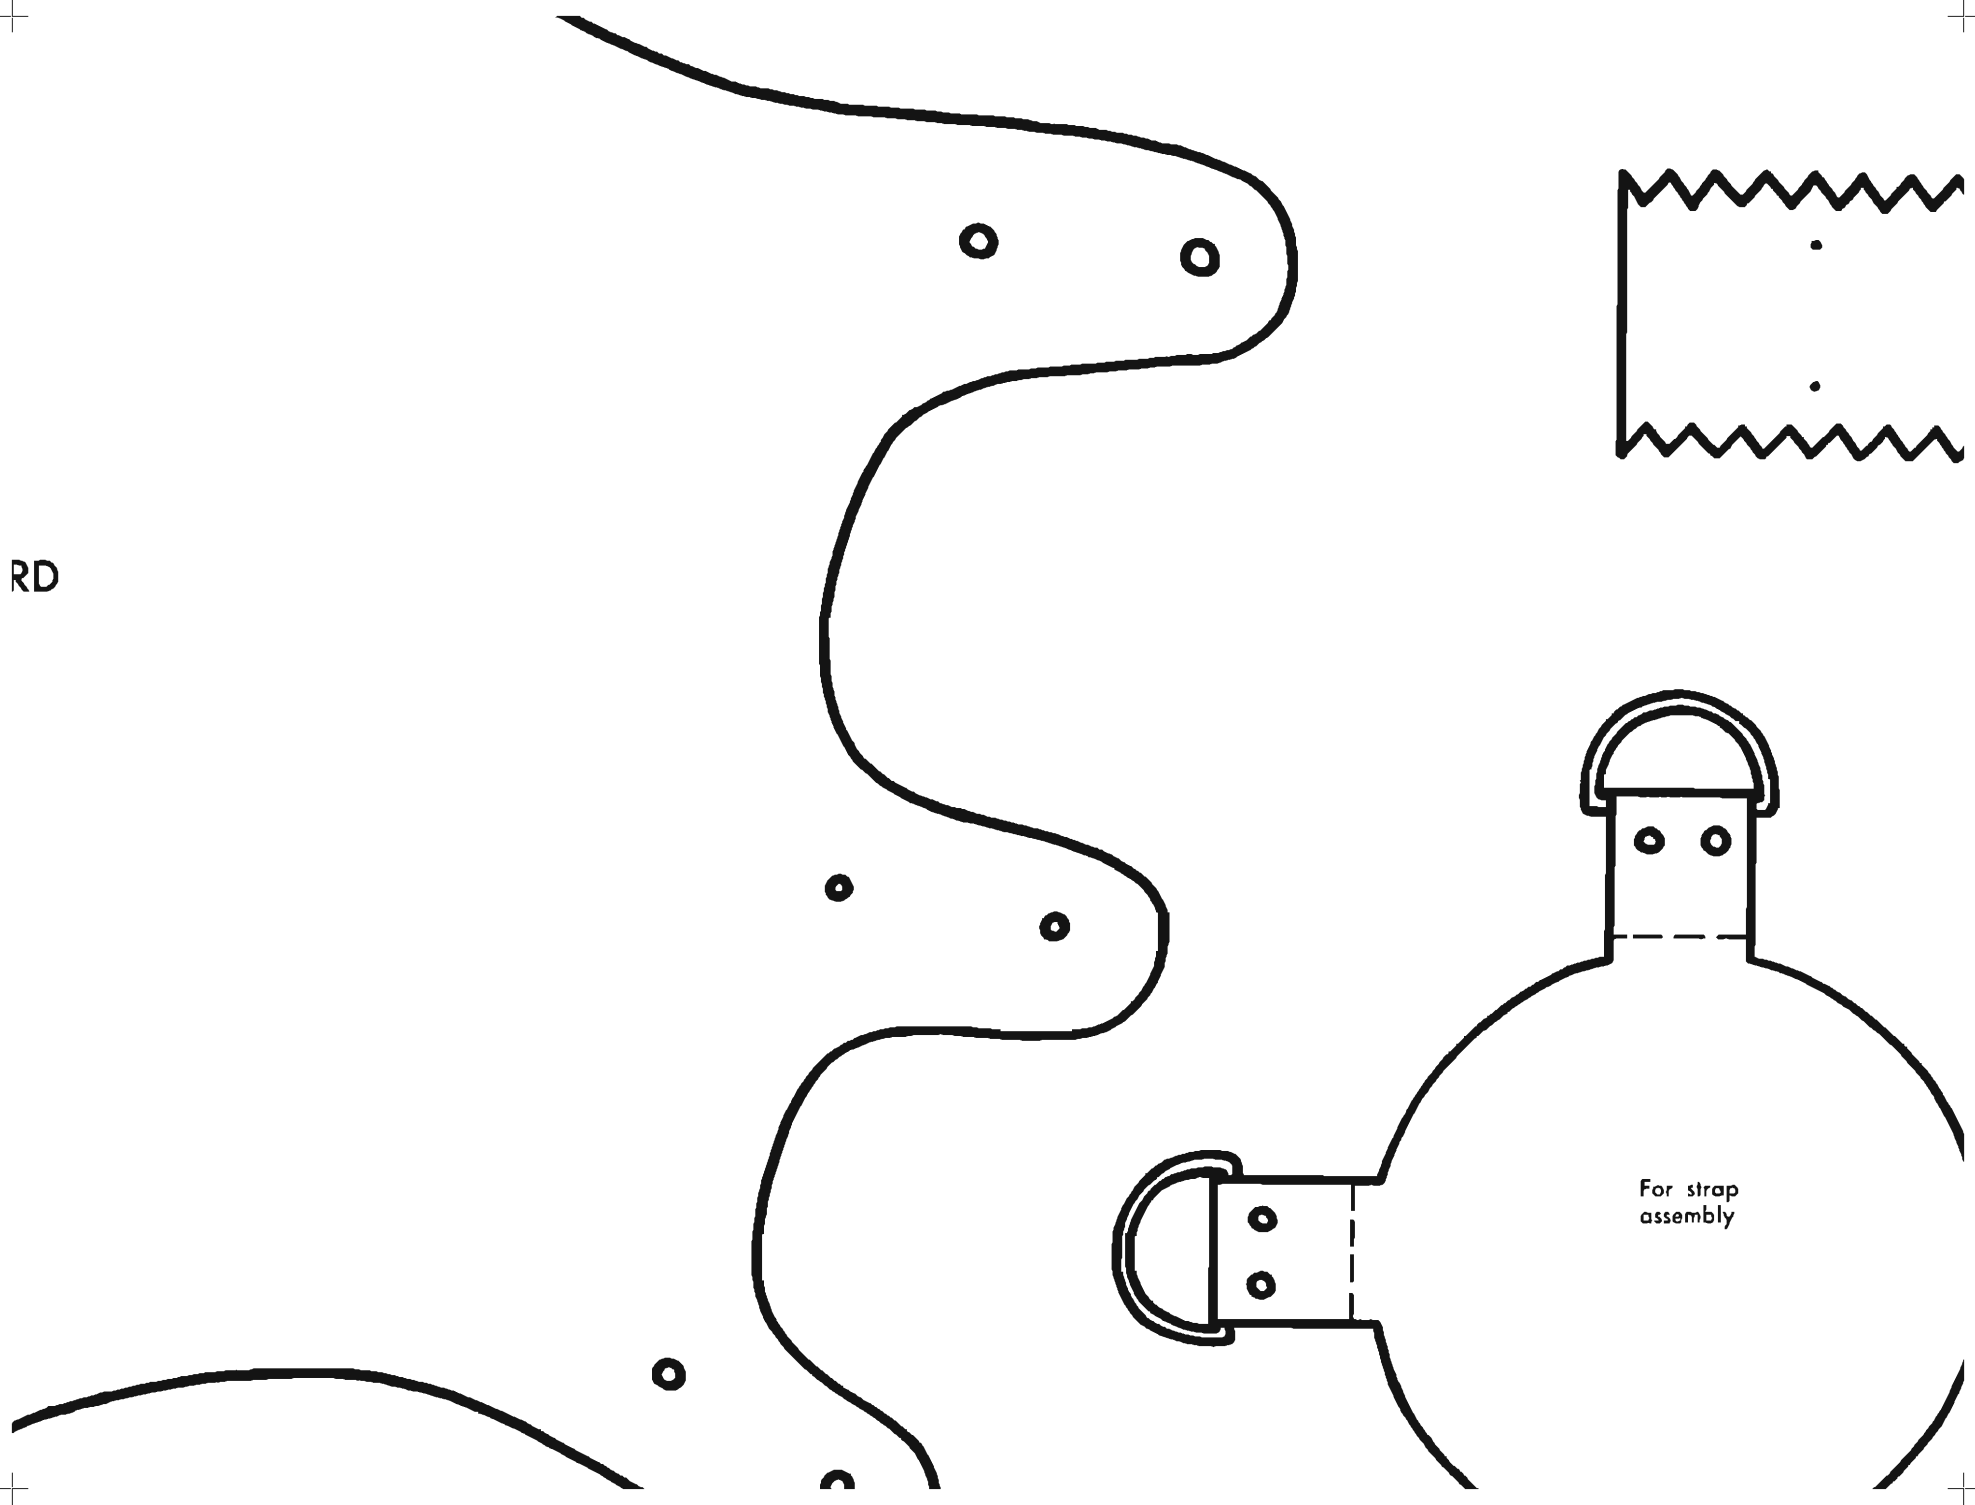


For strap
assembly




Trim for back

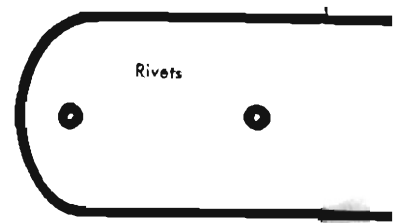


et to quiver

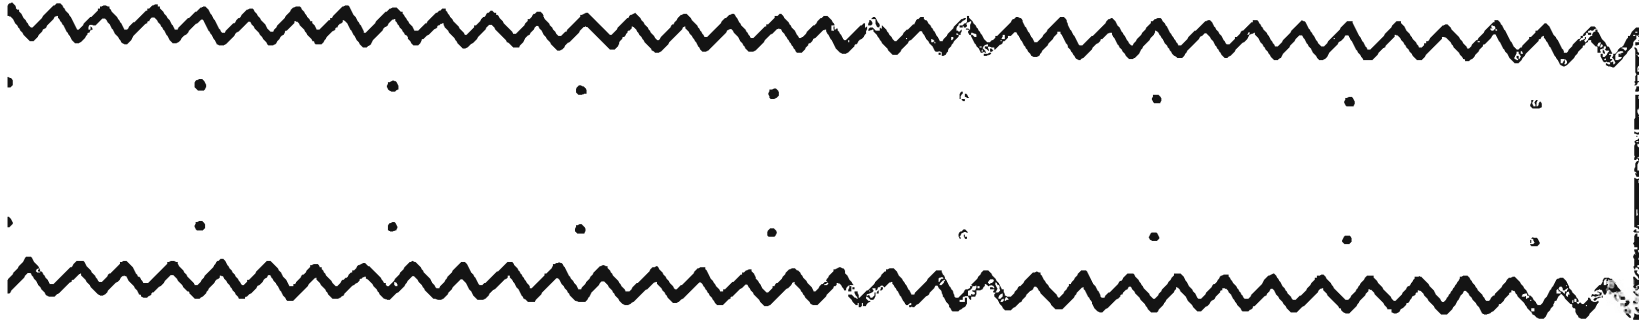

Shoulder Strap Adjusting Tab

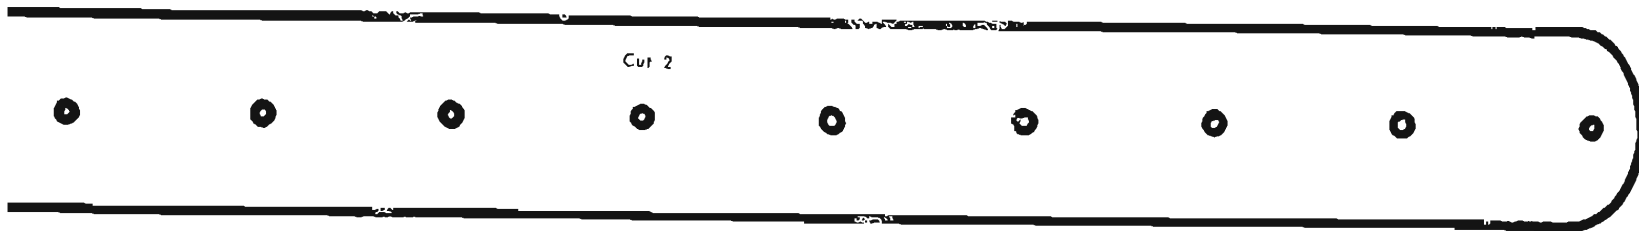

Cut 2

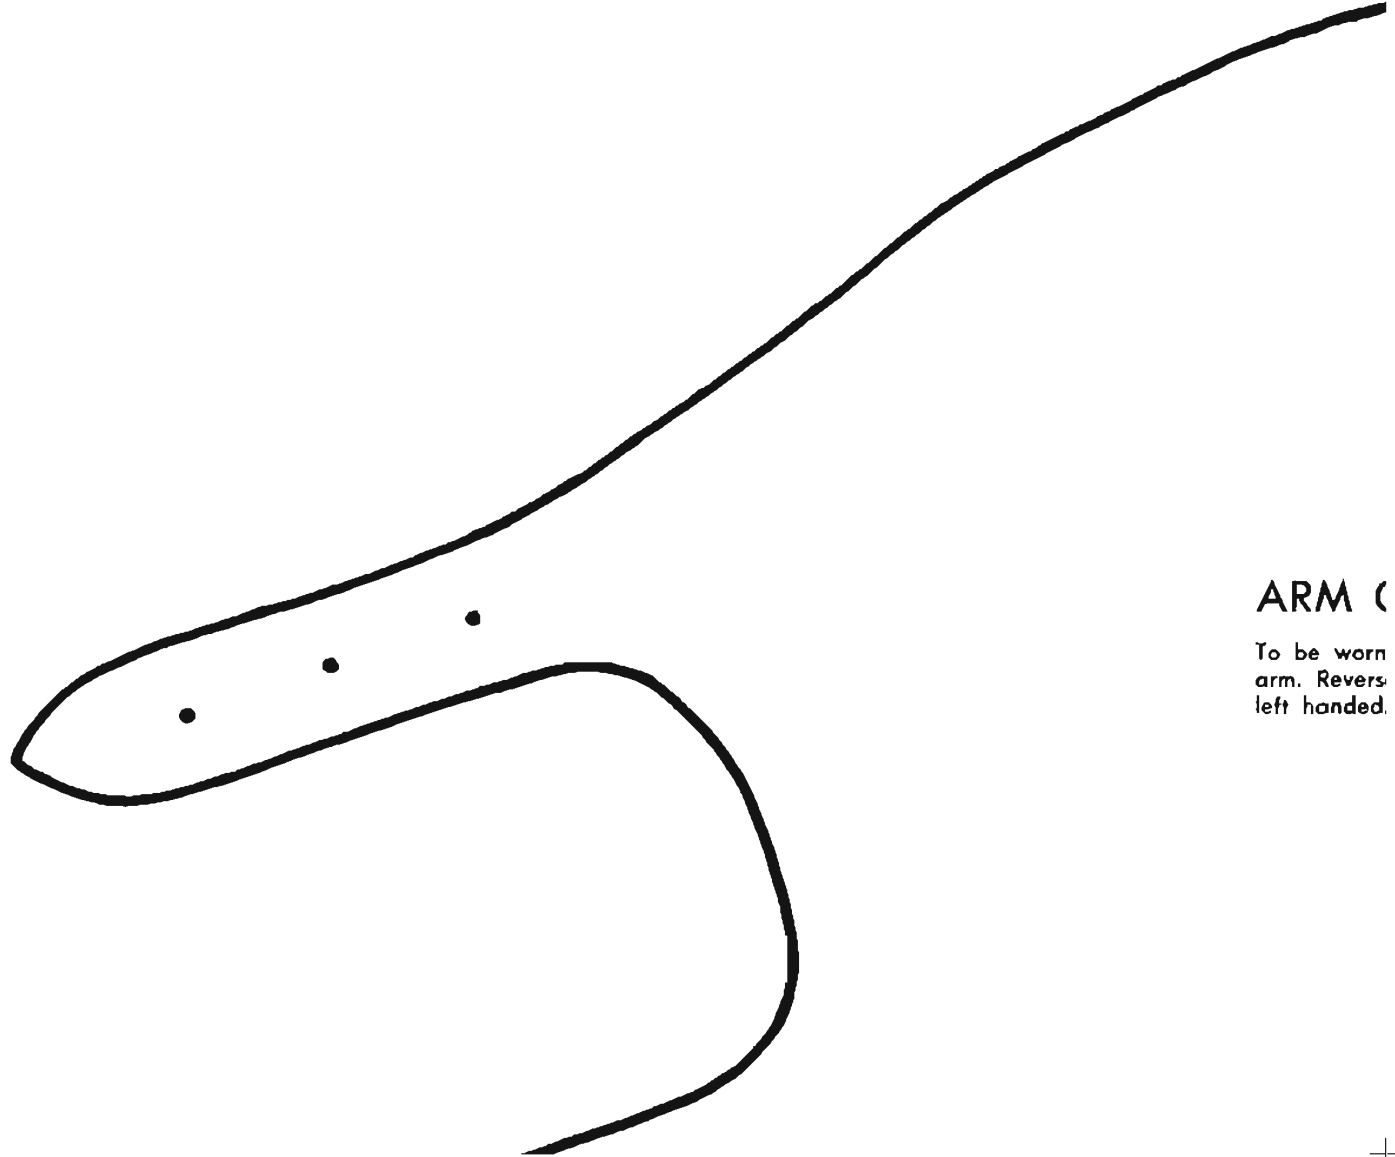


ARM (



To be worn
arm. Revers:
left handed.

GUARD


on left
e if

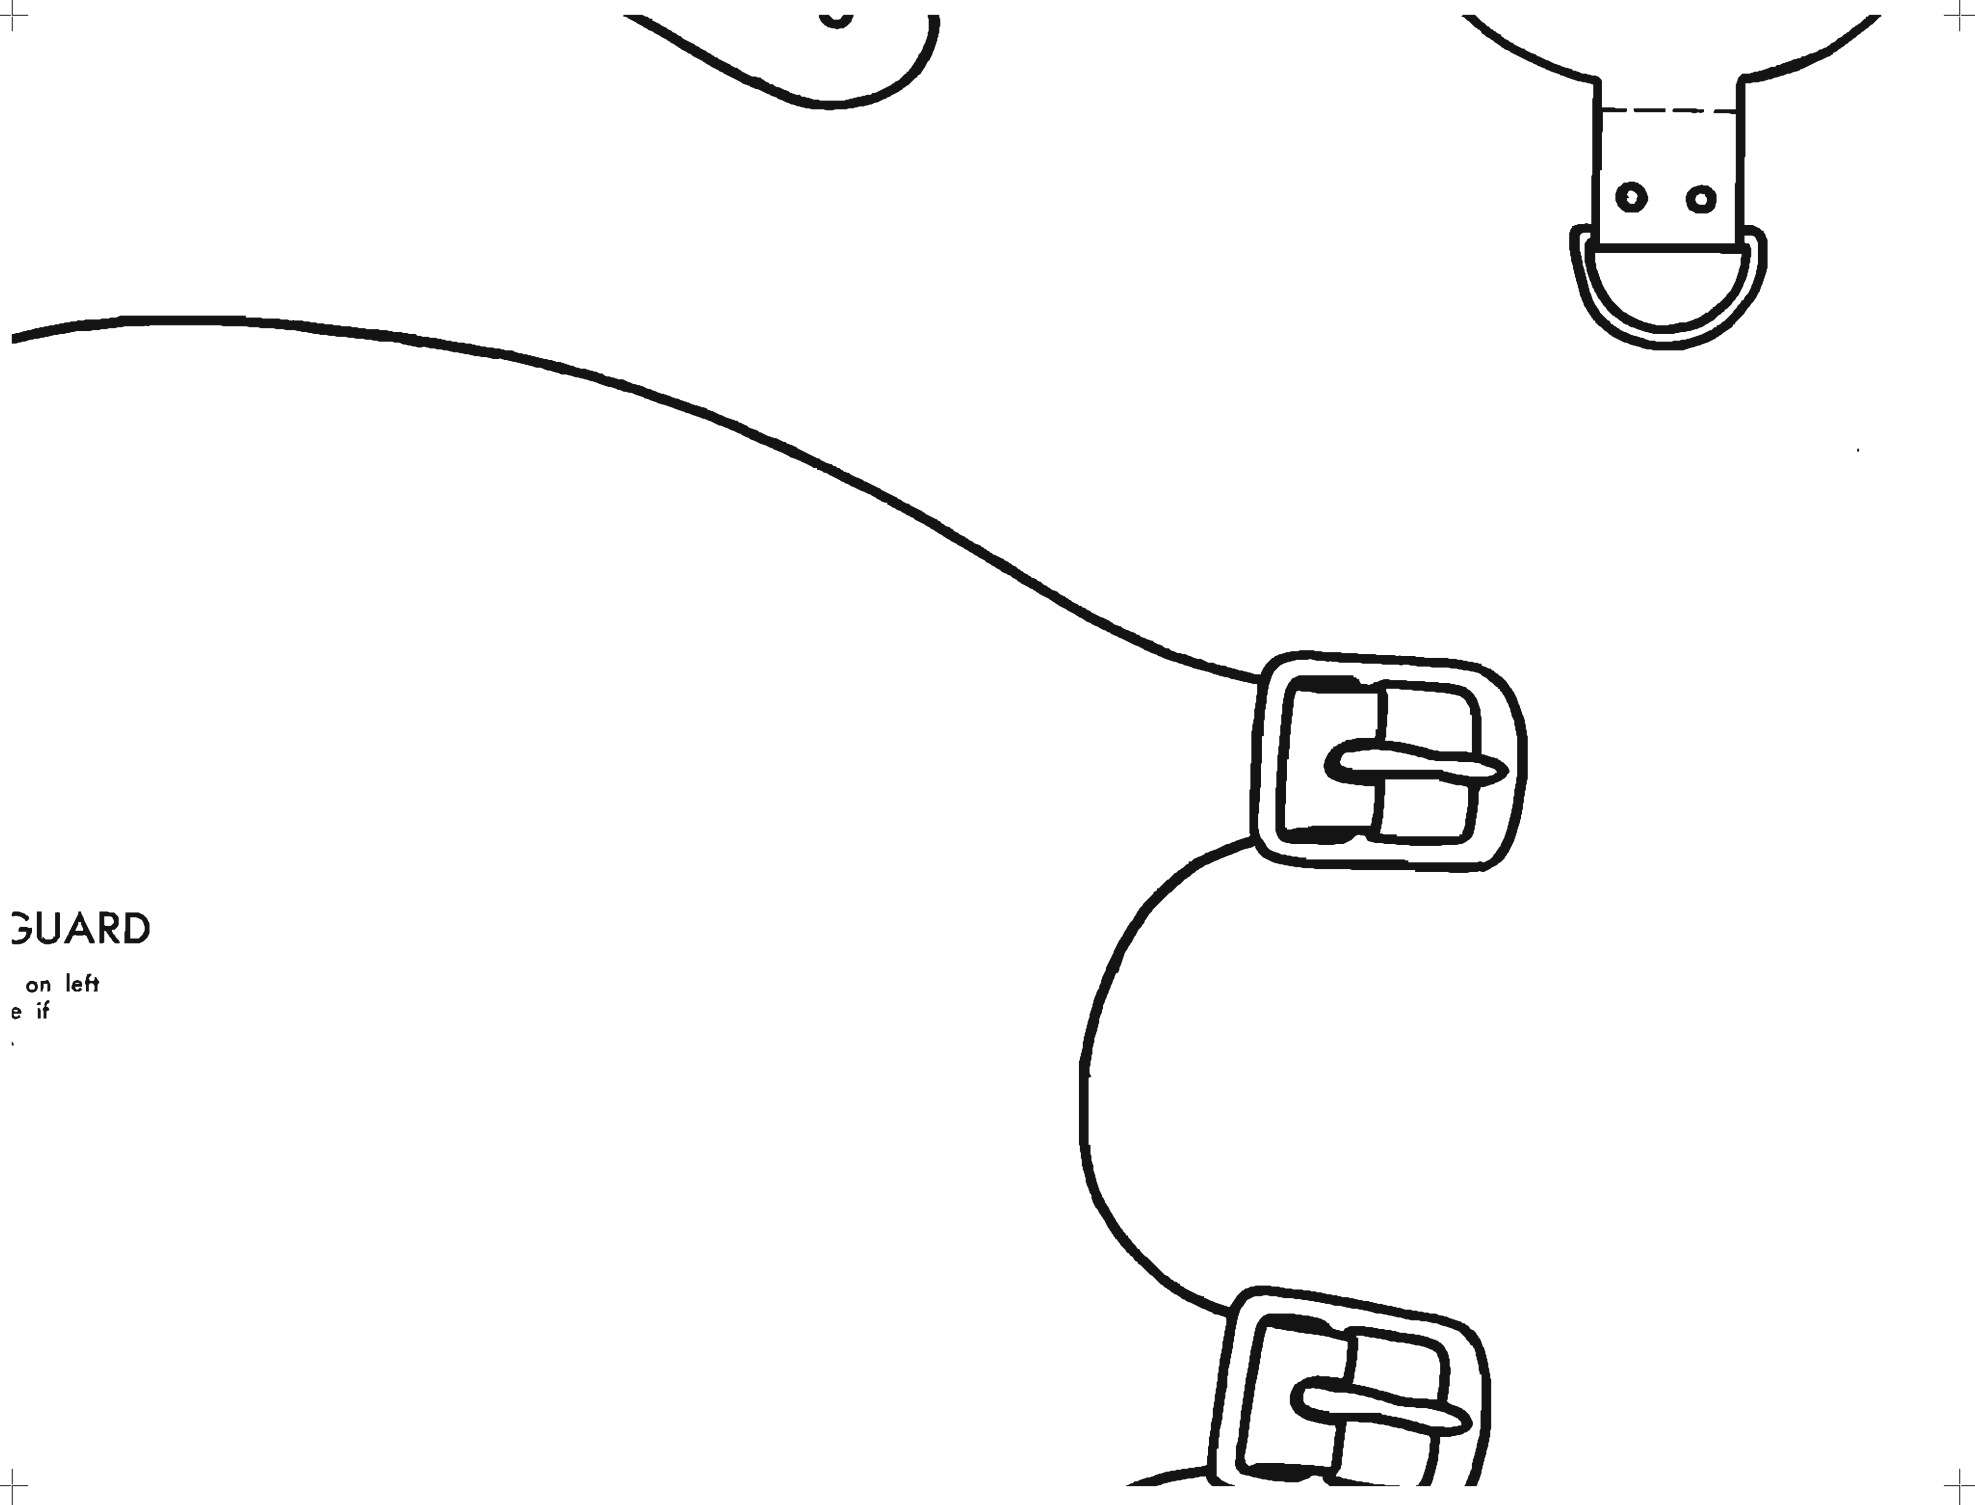



Make Your Own Quiver and

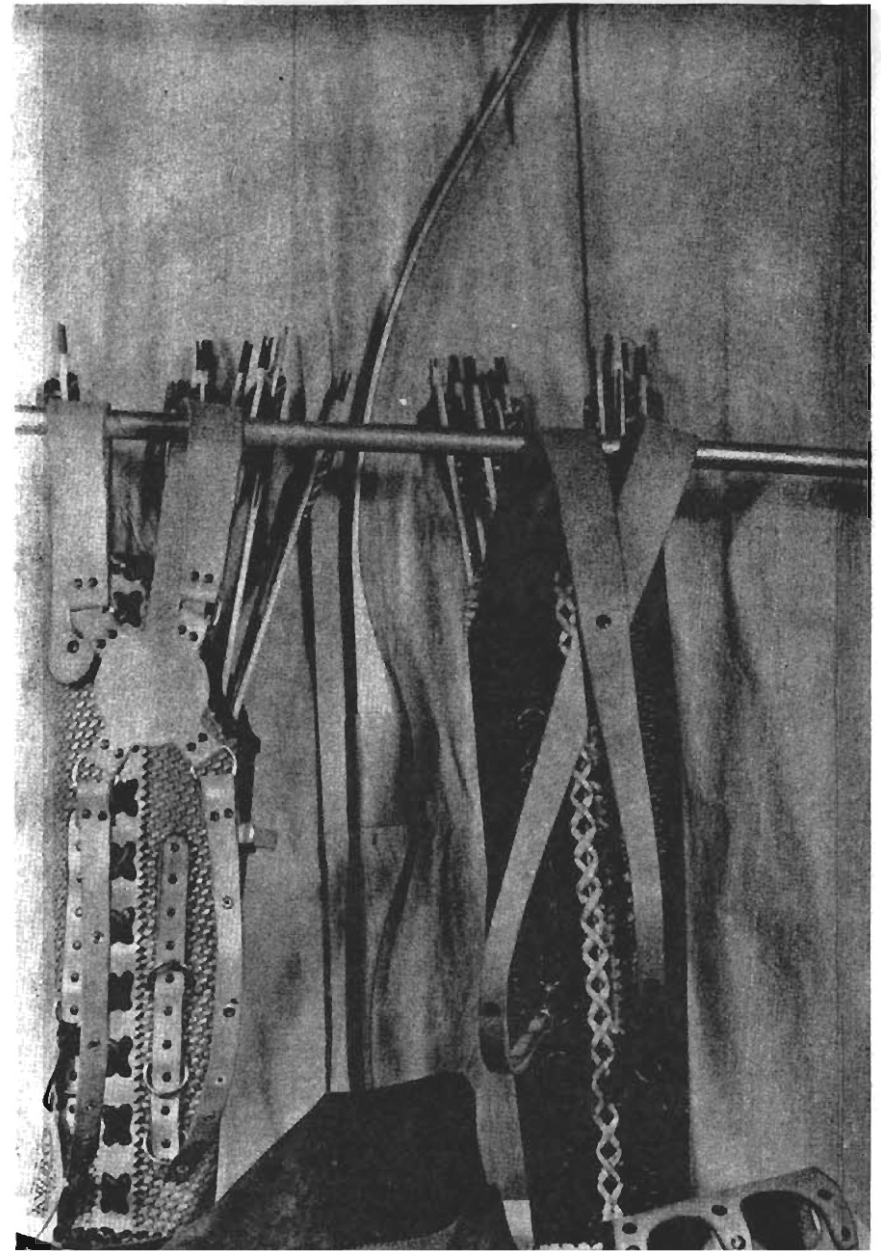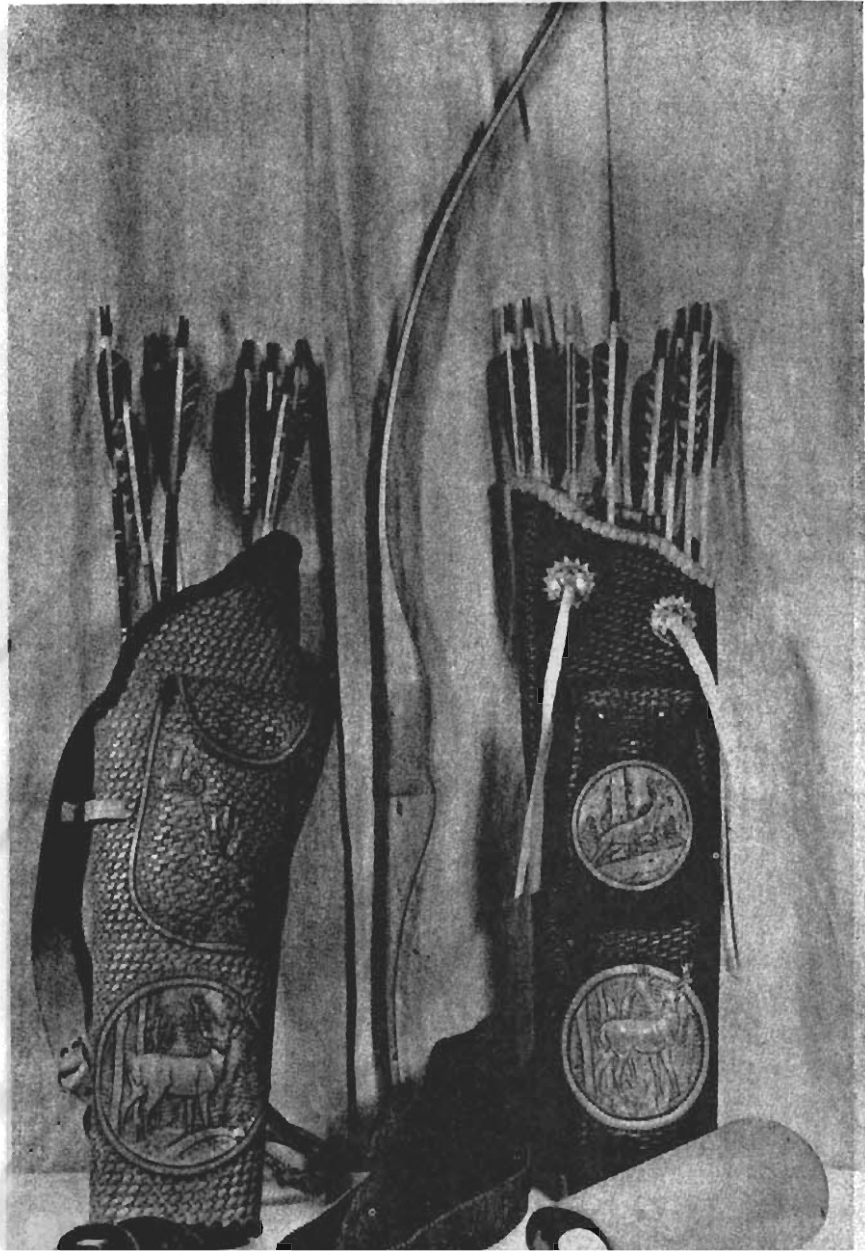

Archery Accessories Of Enduring Leather!

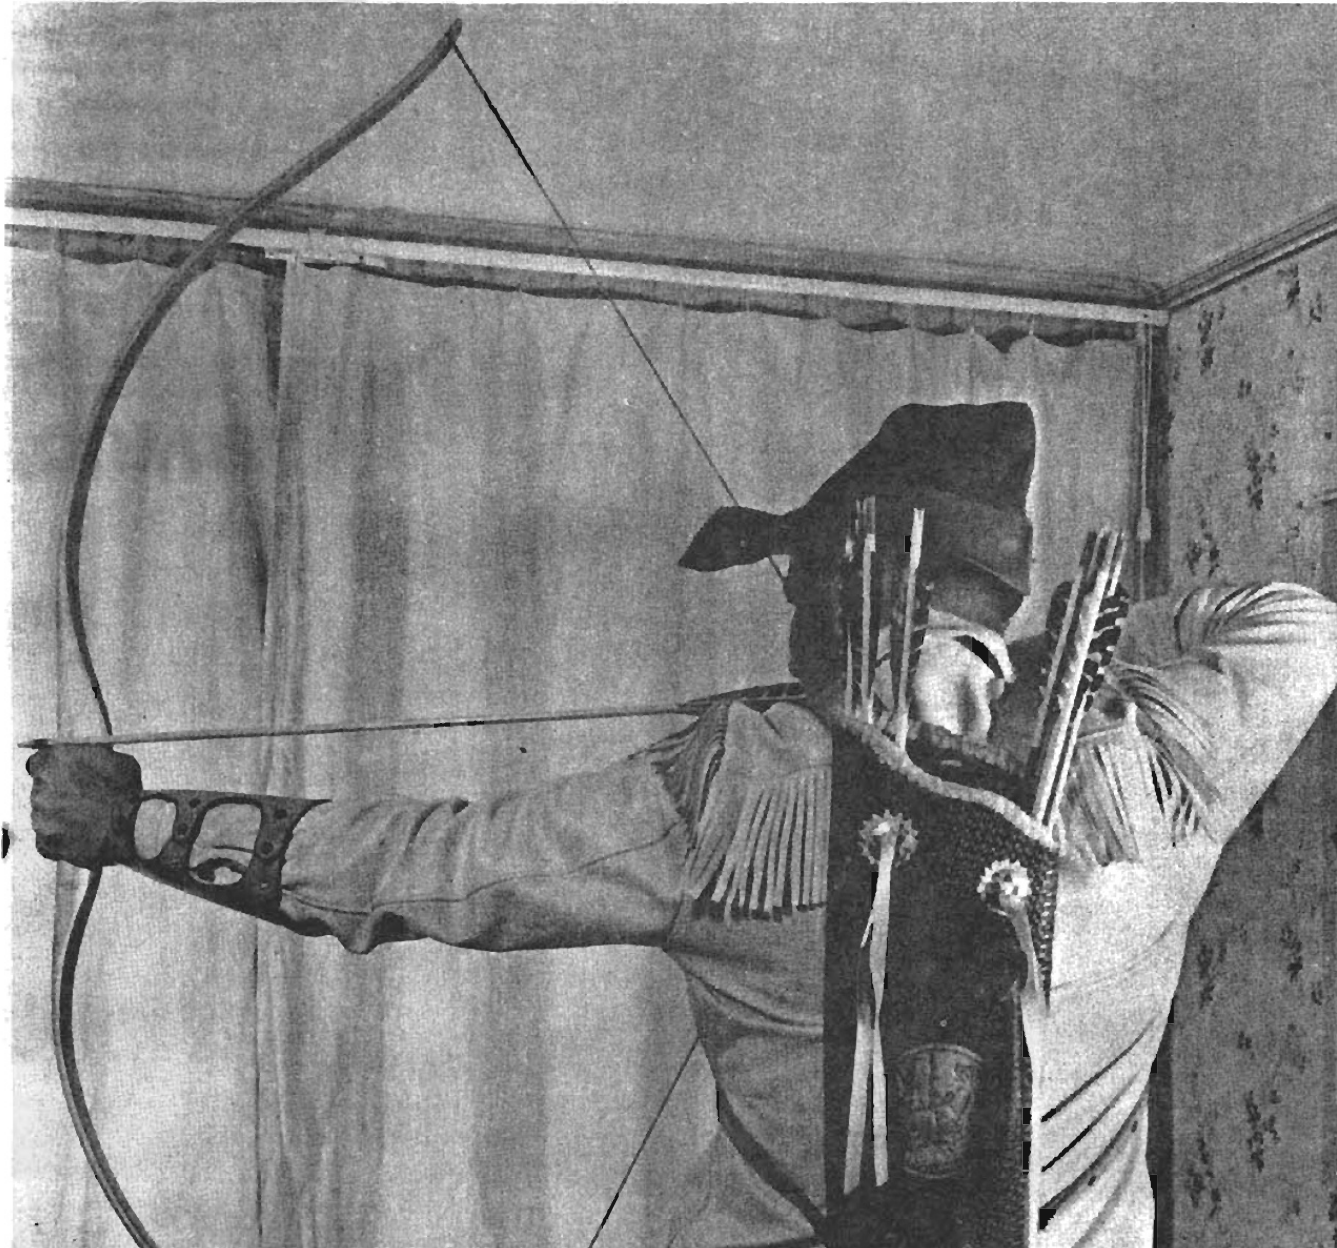

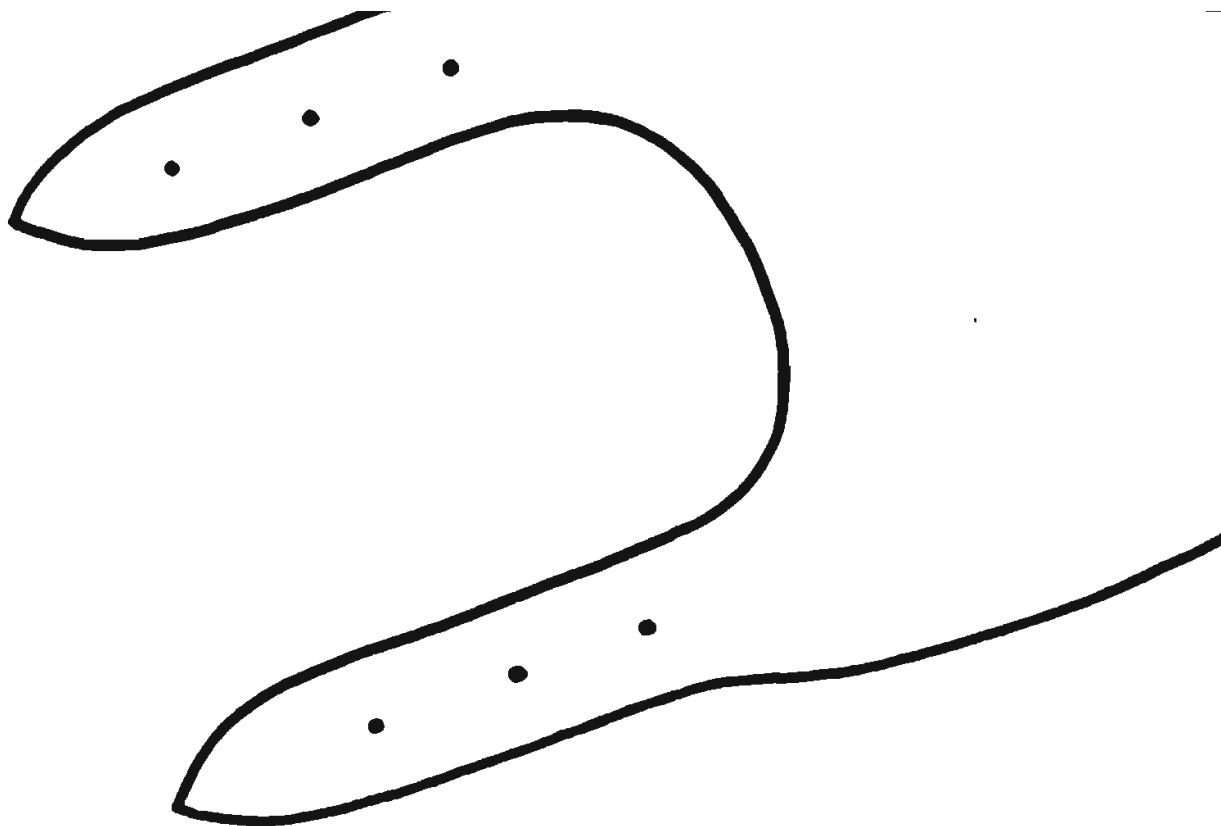

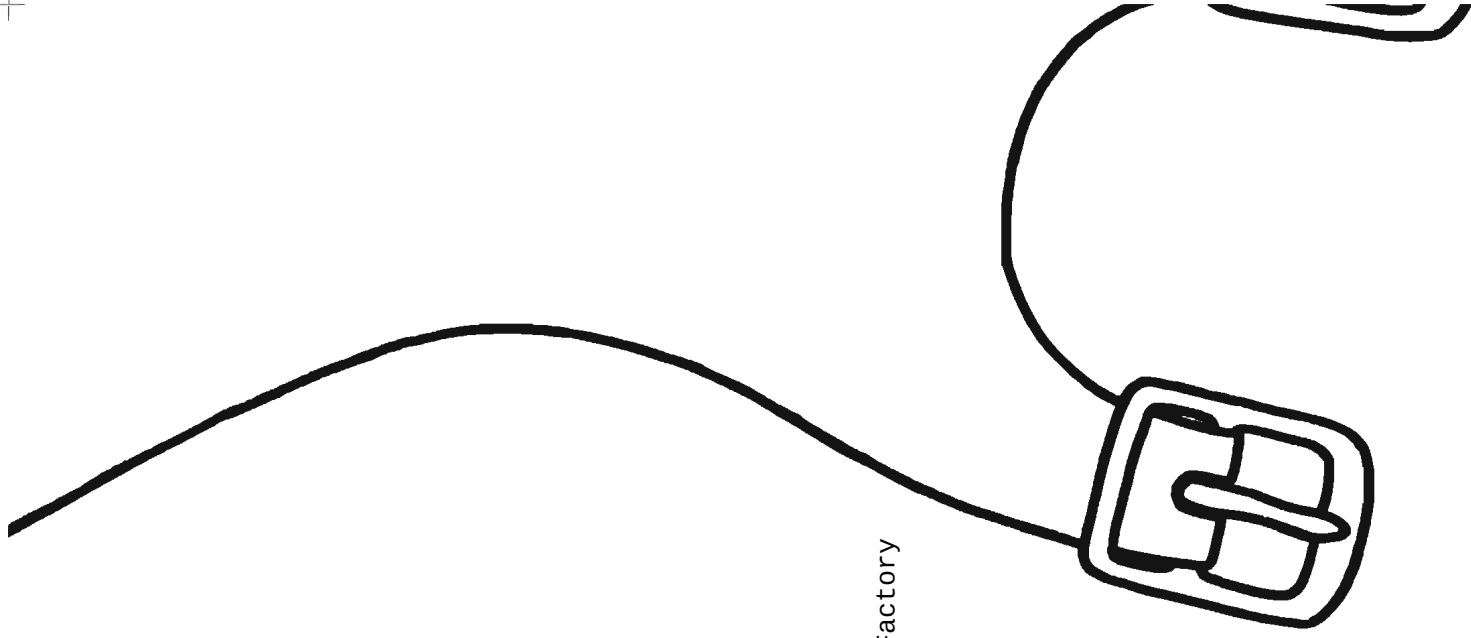

©Copyright 2010 by Tandy Leather Factory
All Rights Reserved



The two quivers, straps and arm guard as pictured were made from 6/7 oz. cowhide. This quiver has been very popular in the Boise area because of its size and shape. It's light and can carry 12 to 18 broadhead arrows along with a repair kit, first aid, and all your personal needs in the little pocket.

For the quiver take the leather and cut as diagram shows. The more popular leathers being: moccasin cow, leopard on calf, short hair calf and 6/7 oz. cowhide for tooling. For carving you can use any pattern from flowers to figures. If you are going to have any scenes or carving it should be done first then follow up with your basket weave. We used patterns from the Al Stelman book, which are simple enough for any beginner. When they were complete we took a basket weave stamp; 513 or 505 and completely stamped the rest of the quiver. The quiver on the right was then dyed black all except for the scenes followed with Neat Lac. The one on the left was left natural. When the pocket is finished sew it to the body of the quiver using the #479 Awl for All.

Now take the edges and either over lap and stitch or butt together, cover with a piece of trim that has been pinked and dyed to match, and lace like a pair of shoes. On the back of the quiver are 2 taps with dee rings made for adjusting your straps. Each is 10 inches long with a rivet every inch. In the spaces you can add the dees needed. After adding your dee tabs you are ready to lace top and bottom. Punch holes with #1 punch 5/16" apart, take a piece of calf chrome or medium horse hide which has been cut into 1/2" strips and lace the bottom in place. The Bottom can be soaked and shaped perfectly to fit. When dry, glue a piece of wood on top covered with shearling. Then lace with a whip stitch around the bottom. For the top take a heavy piece of wire and shape to the top edge—then whip lace the top with the wire enclosed, this will keep a rigid and nice looking top. Use about 3 yards for the bottom and 1½ yards for the top. Use same material for top, bottom and lacing the edges of quiver together. For wire around the top, use clothes hanger wire or heavier.



The strap assemblies pictured are for center hang quivers. The one on the left is the simplest with one strap going from right to left and one strap going from left to right. They were attached with segma belt snaps, one placed in the center for the left and chap snaps on the end for quick attaching.

If a right draw quiver is desired just have one strap going from top right to left as viewed from back.

For the strap assembly on the left the straps were simply cut in half and the disc added. Rivet 3/4" dees on the spokes and then rivet straps in place.

The conchos and streamers can be added or left off. It does add a little more weight and has some practical use for carrying lunch or sweater. Take scraps of horse calf chrome and cut out a pinked concho, add your nickel concho and secure with a screw of same.


The finger stalls can be cut from chrome calf and stitch as indicated.

The Robin Hood Hat was cut from full weight suede; stitched on a sewing machine and folded to shape. Add your feather and it couldn't look any more real.

Arm guards come in varying styles and shapes. We chose the one pictured because it gives your arm full protection. You can't possibly snag or wreck a bow string never needs readjusting after a day of hunting or shooting. It can be carved or stamped to match your quiver.

One with snaps is different and can be put on fast. Belt snaps were used instead of buckles having two snaps—three sizes can be made, small, medium, and large. Some people use buckles to snaps and in that case use 3/4" #414 buckle.

Only one word of caution to anyone making this quiver and these accessories. When you get into the field and meet a fellow archer you'll be making him a set too!

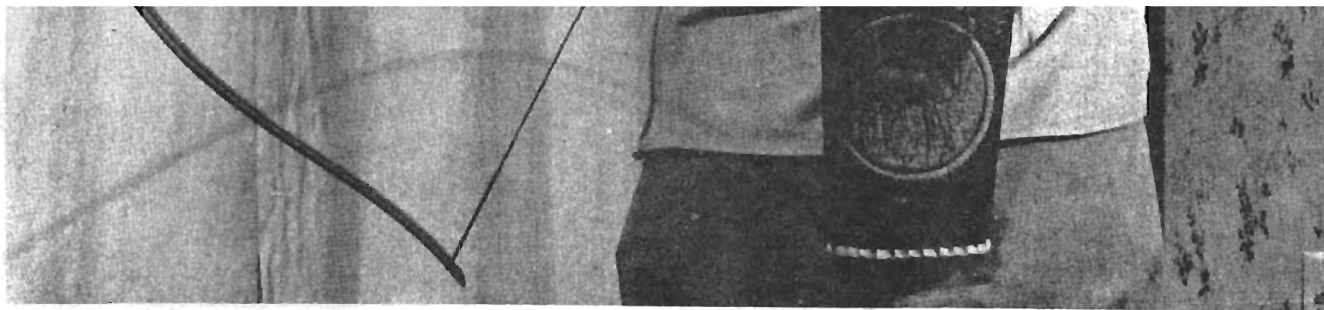

right is
left to
spacing,

bottom

circular

we show
hide or
h strips

machine

because
and it
tamped

and by
fer the

When

MATERIALS REQUIRED

For quiver complete with pocket, straps, assembly,
plus arm guard — 1 back of 6/7 oz. Liveoak Tooling
Cowhide is plenty, leaving you trim for other projects.
Average size 16 sq. ft.

- 1 skin Calf Chrome, brown, tan or red,
for lacing strips, finger stalls, etc. small
size 6 ft.
- 1 skin Garment Suede for hat, choice of
19 beautiful colors, No. 1 grade, aver-
age size 6 sq. ft.
- 1 piece of Sheep Wool, size 4" x 7", each
- 2 Chap Snaps (for 2 straps)
- 1 doz. 1-inch Dees
- 1 doz. Segma belt snaps, line 16
- 24 rivets

(Note: leather footage varies with the skin)

Distributed by Tandy Warehouse Co., Ft. Worth, Texas


Division of Tandy Corporation


THE MOST COMPLETE SET OF FULL SIZE PATTERNS


EVER OFFERED

#1909


#1909 ARCHERY SET PATTERN

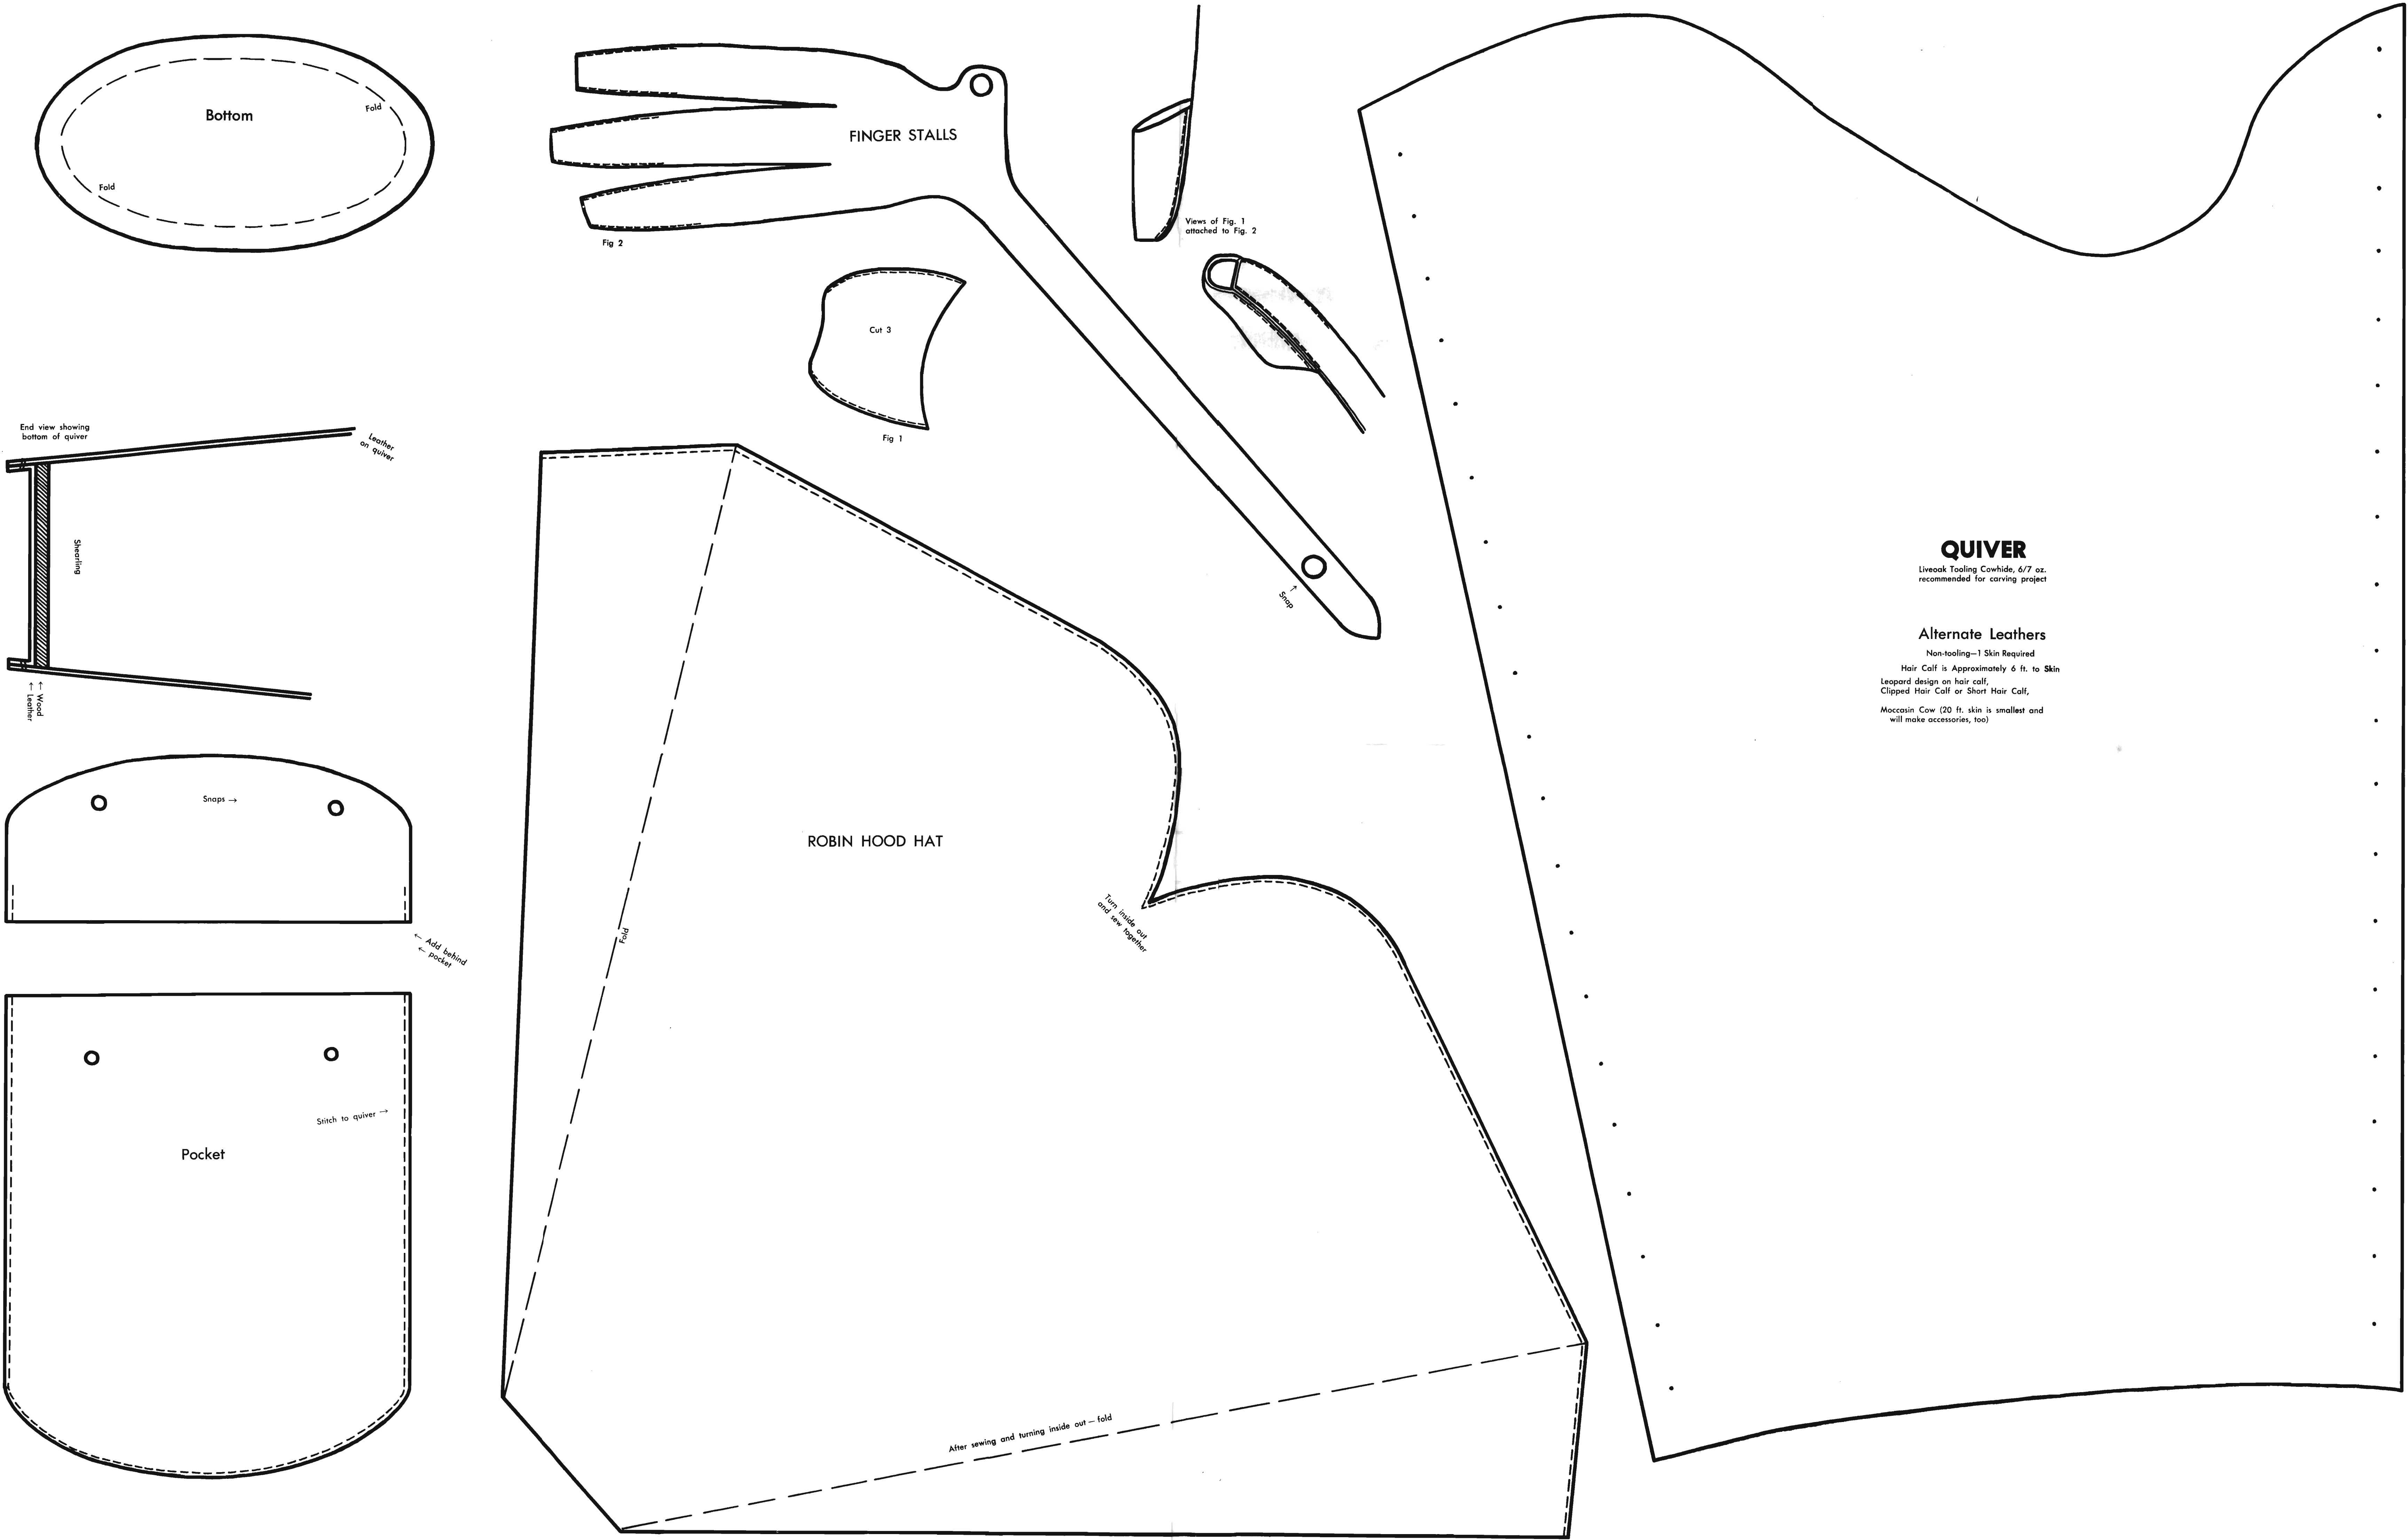


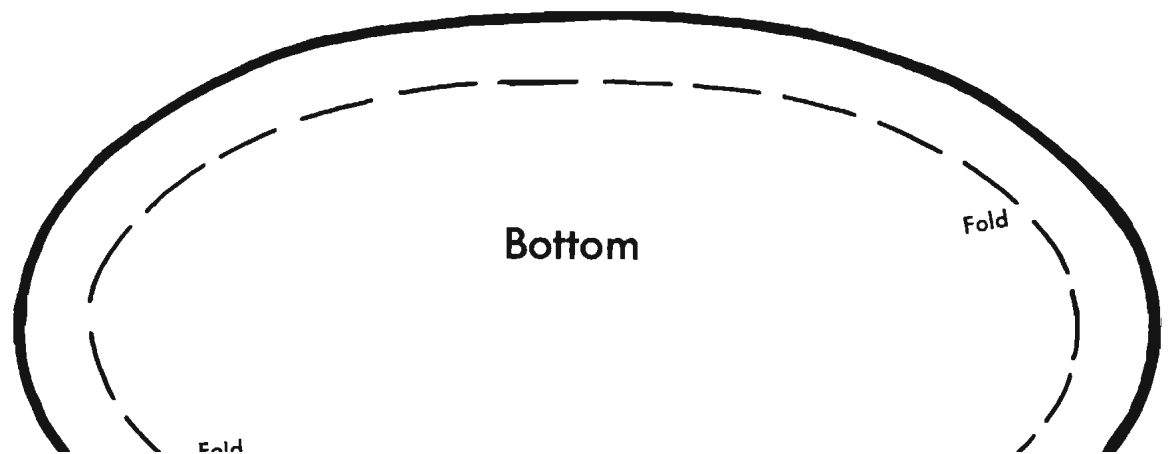

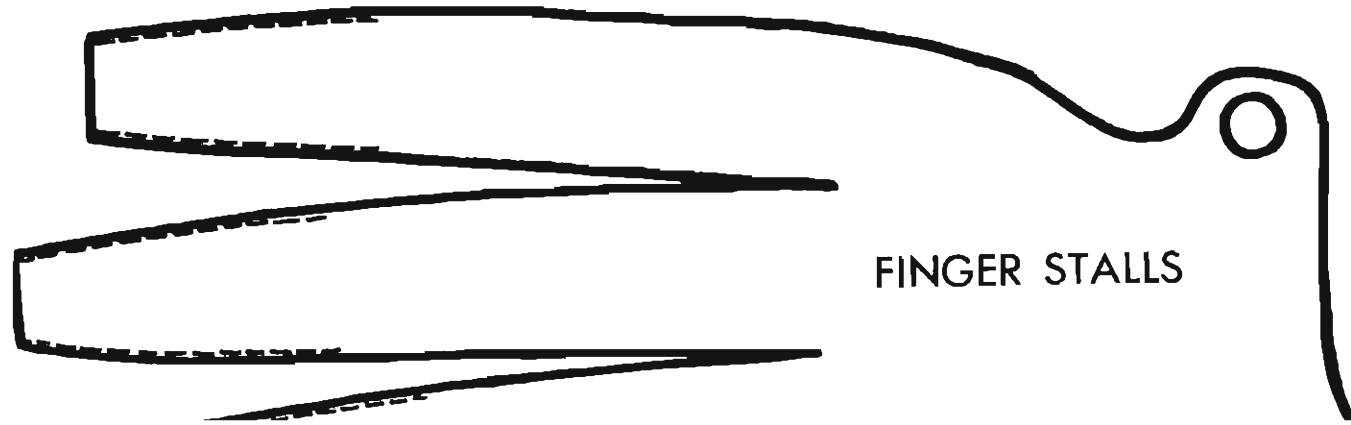

FINGER STALLS

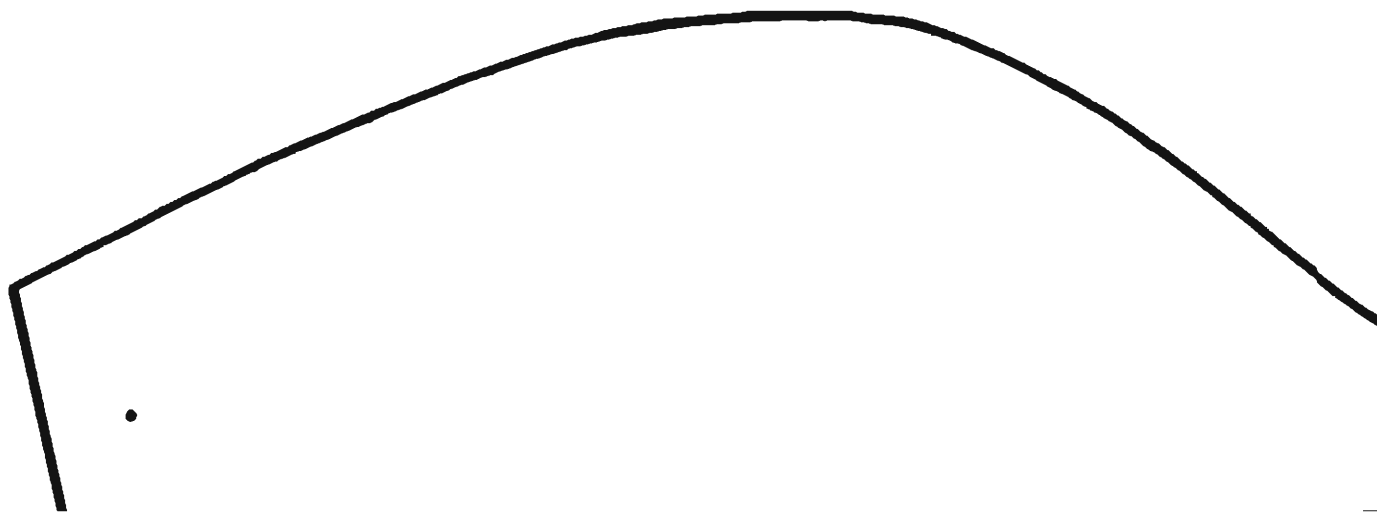

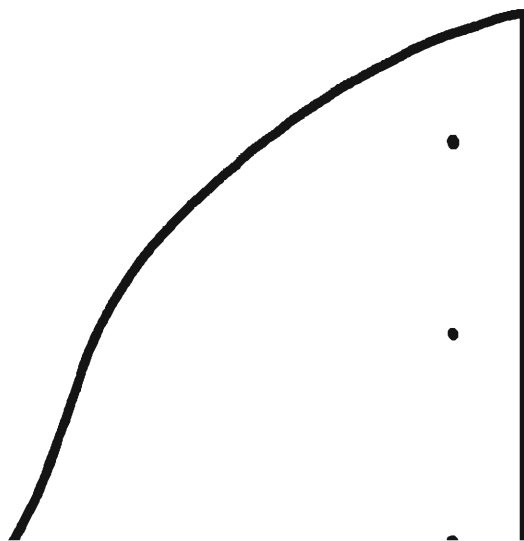



End view showing
bottom of quiver

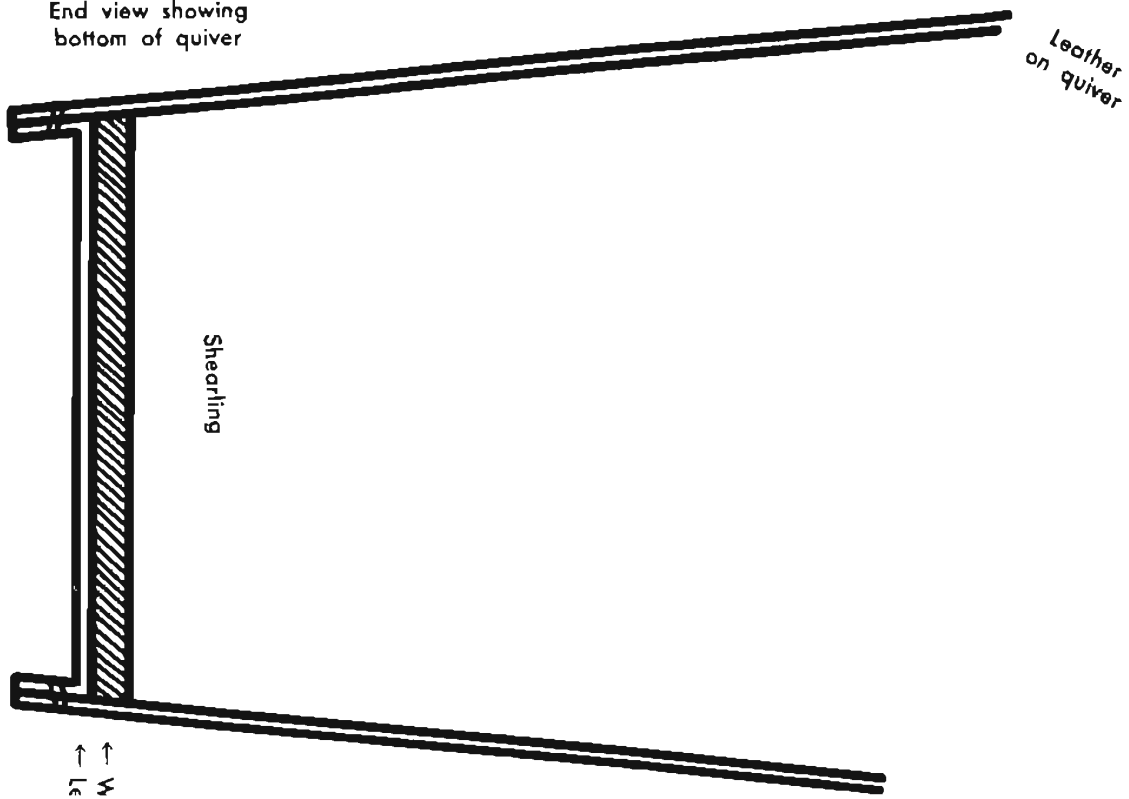




Fig 2



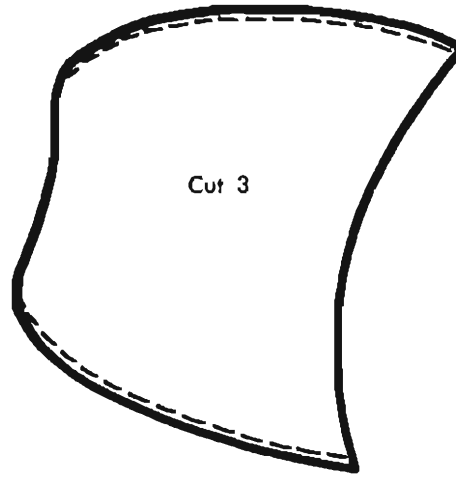


Fig 1

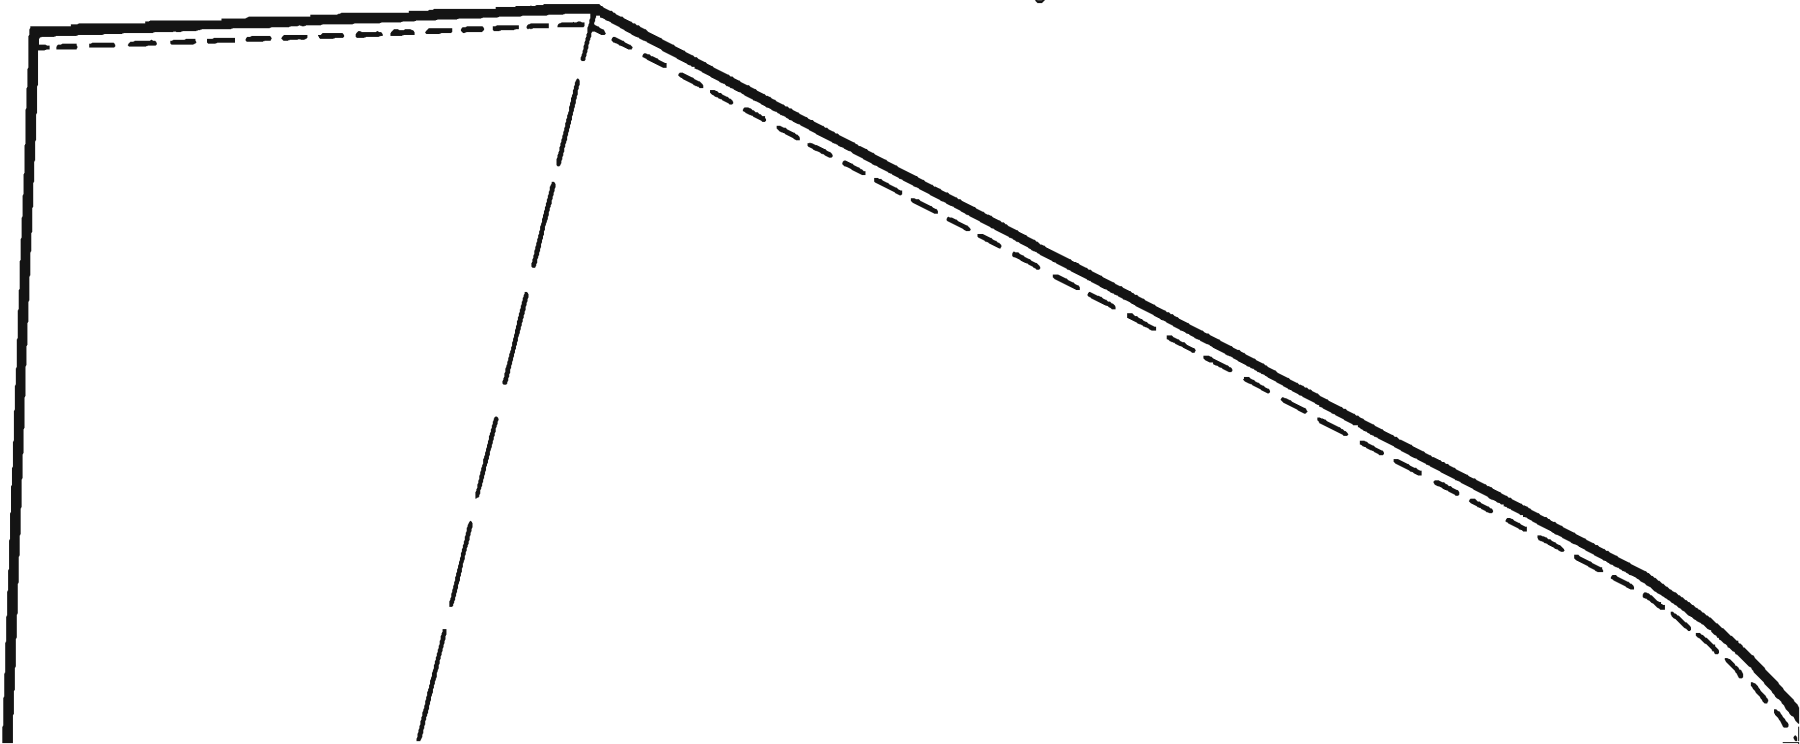


Views of Fig. 1
attached to Fig. 2

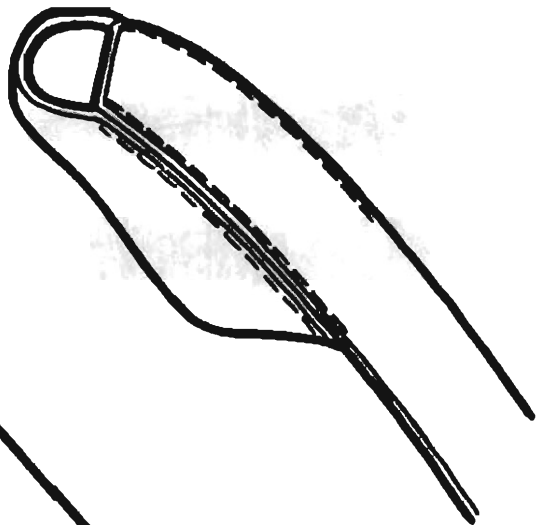

↑
Snap



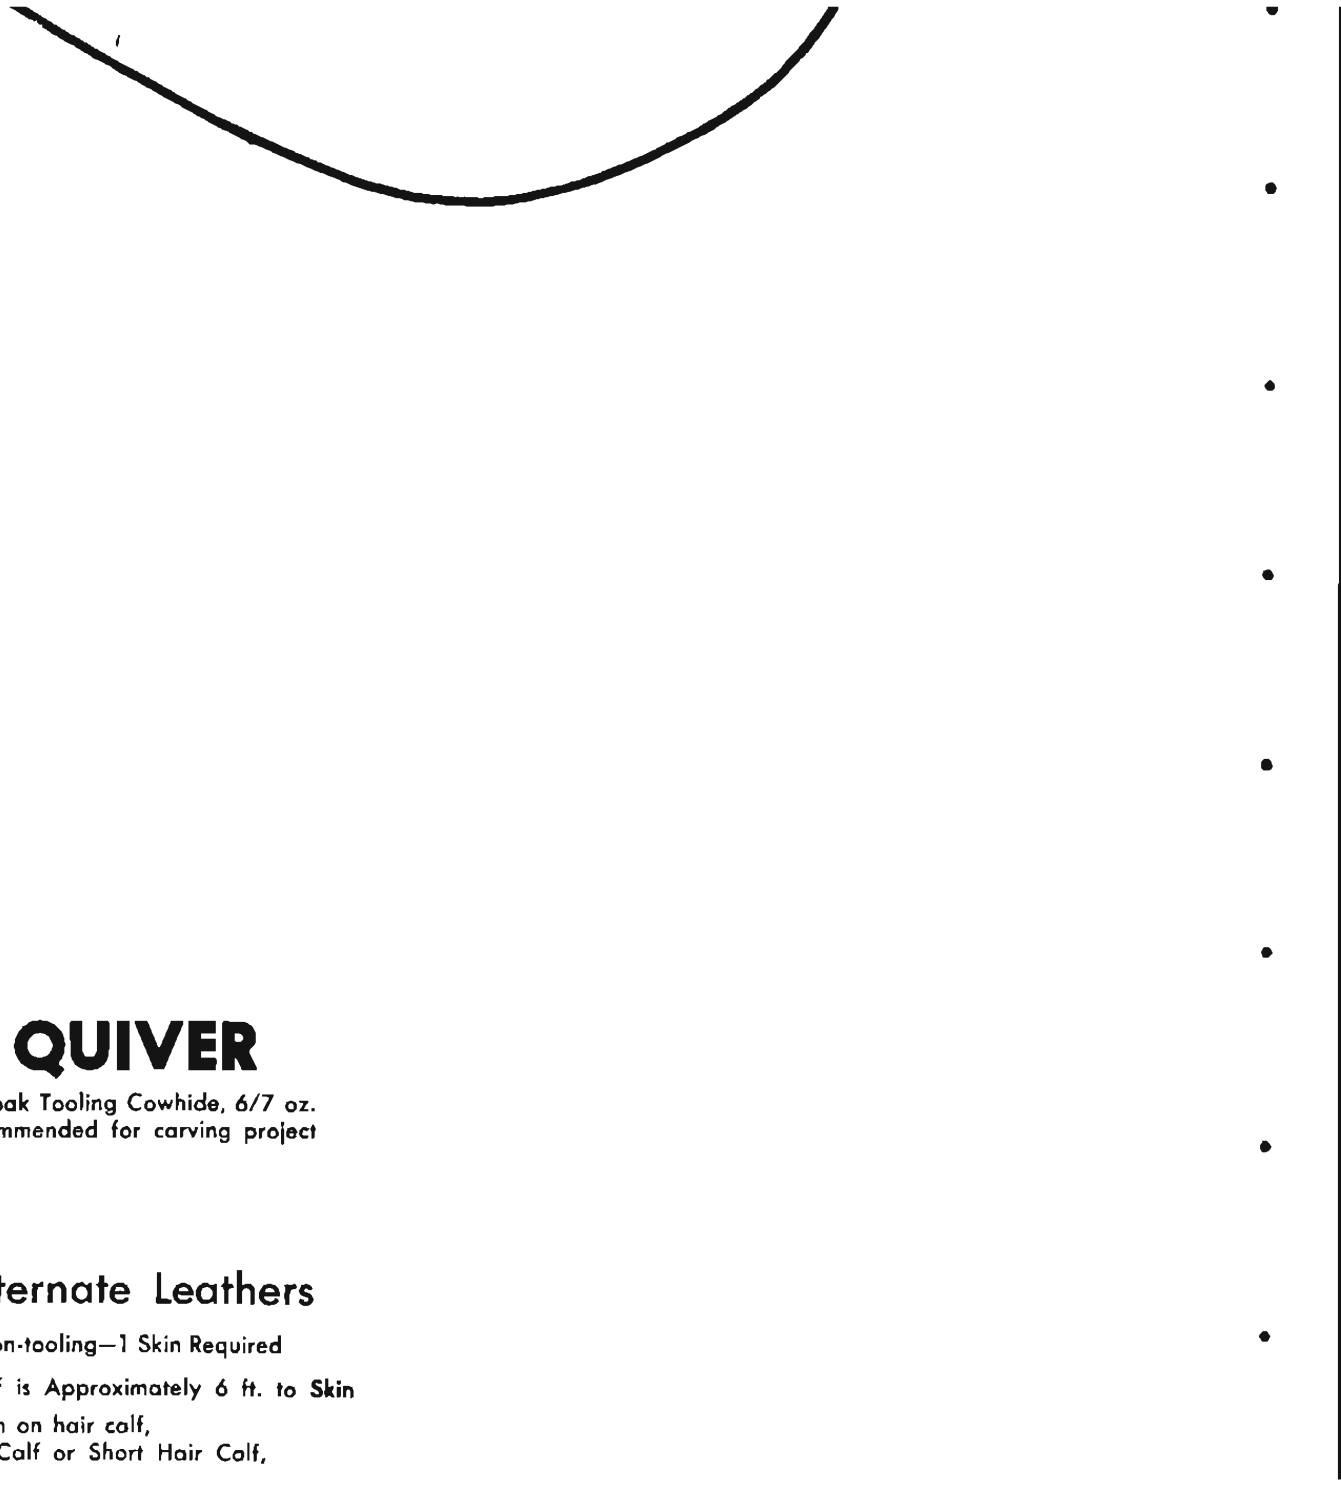

QUIVER


Liveoak Tooling Cowhide, 6/7 oz.
recommended for carving project

Alternate Leathers

Non-tooling—1 Skin Required


Hair Calf is Approximately 6 ft. to Skin

Leopard design on hair calf,
Clipped Hair Calf or Short Hair Calf,

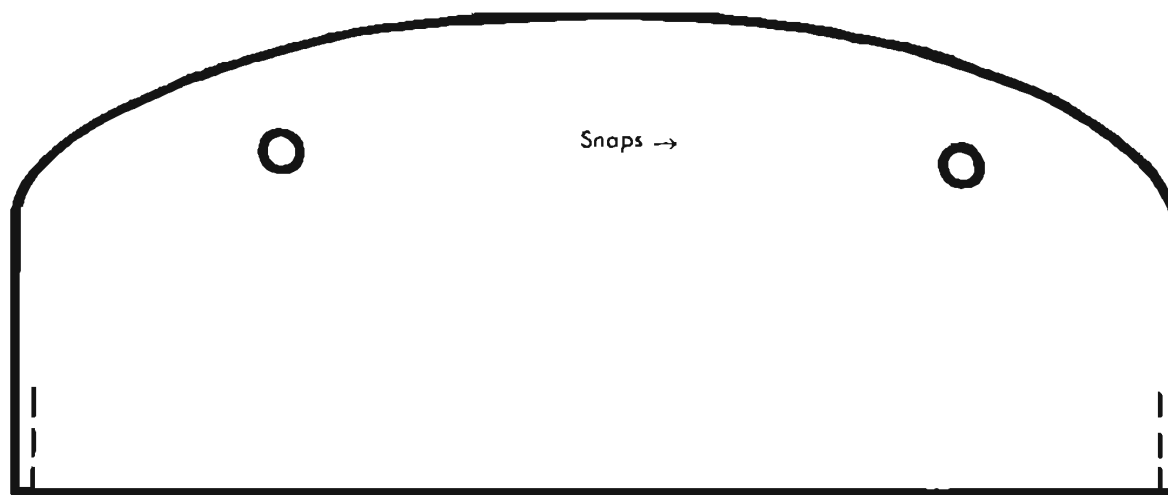

Snap →

← Add behind
← pocket

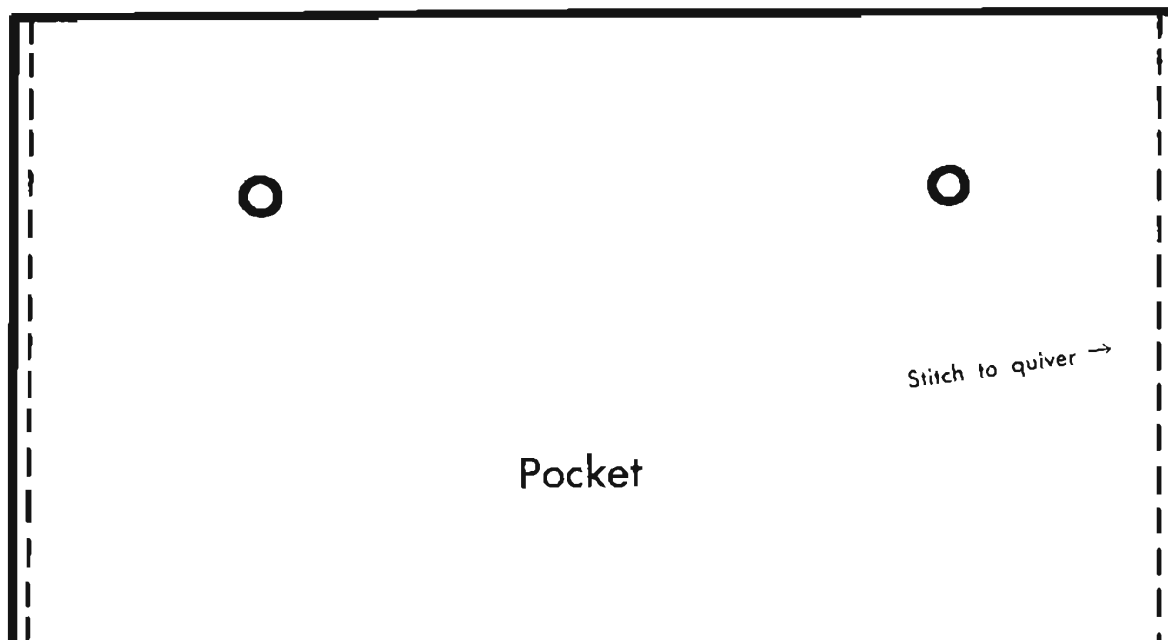


Pocket

Stitch to quiver →


Load
rather

ROBIN HOOD HAT

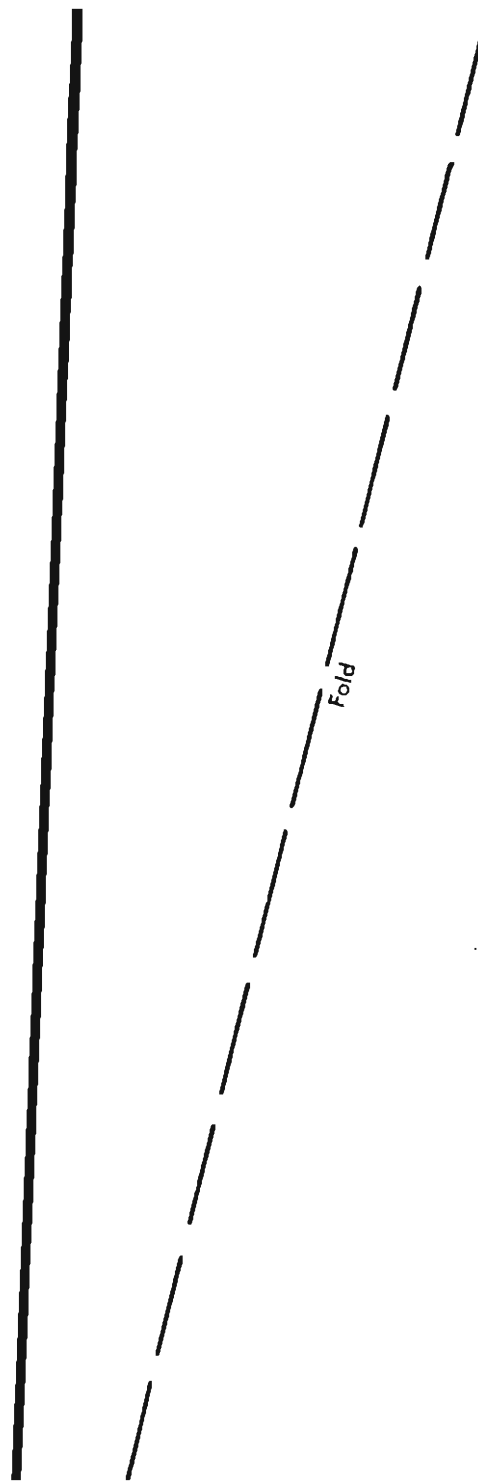

Turn inside out
and sew together



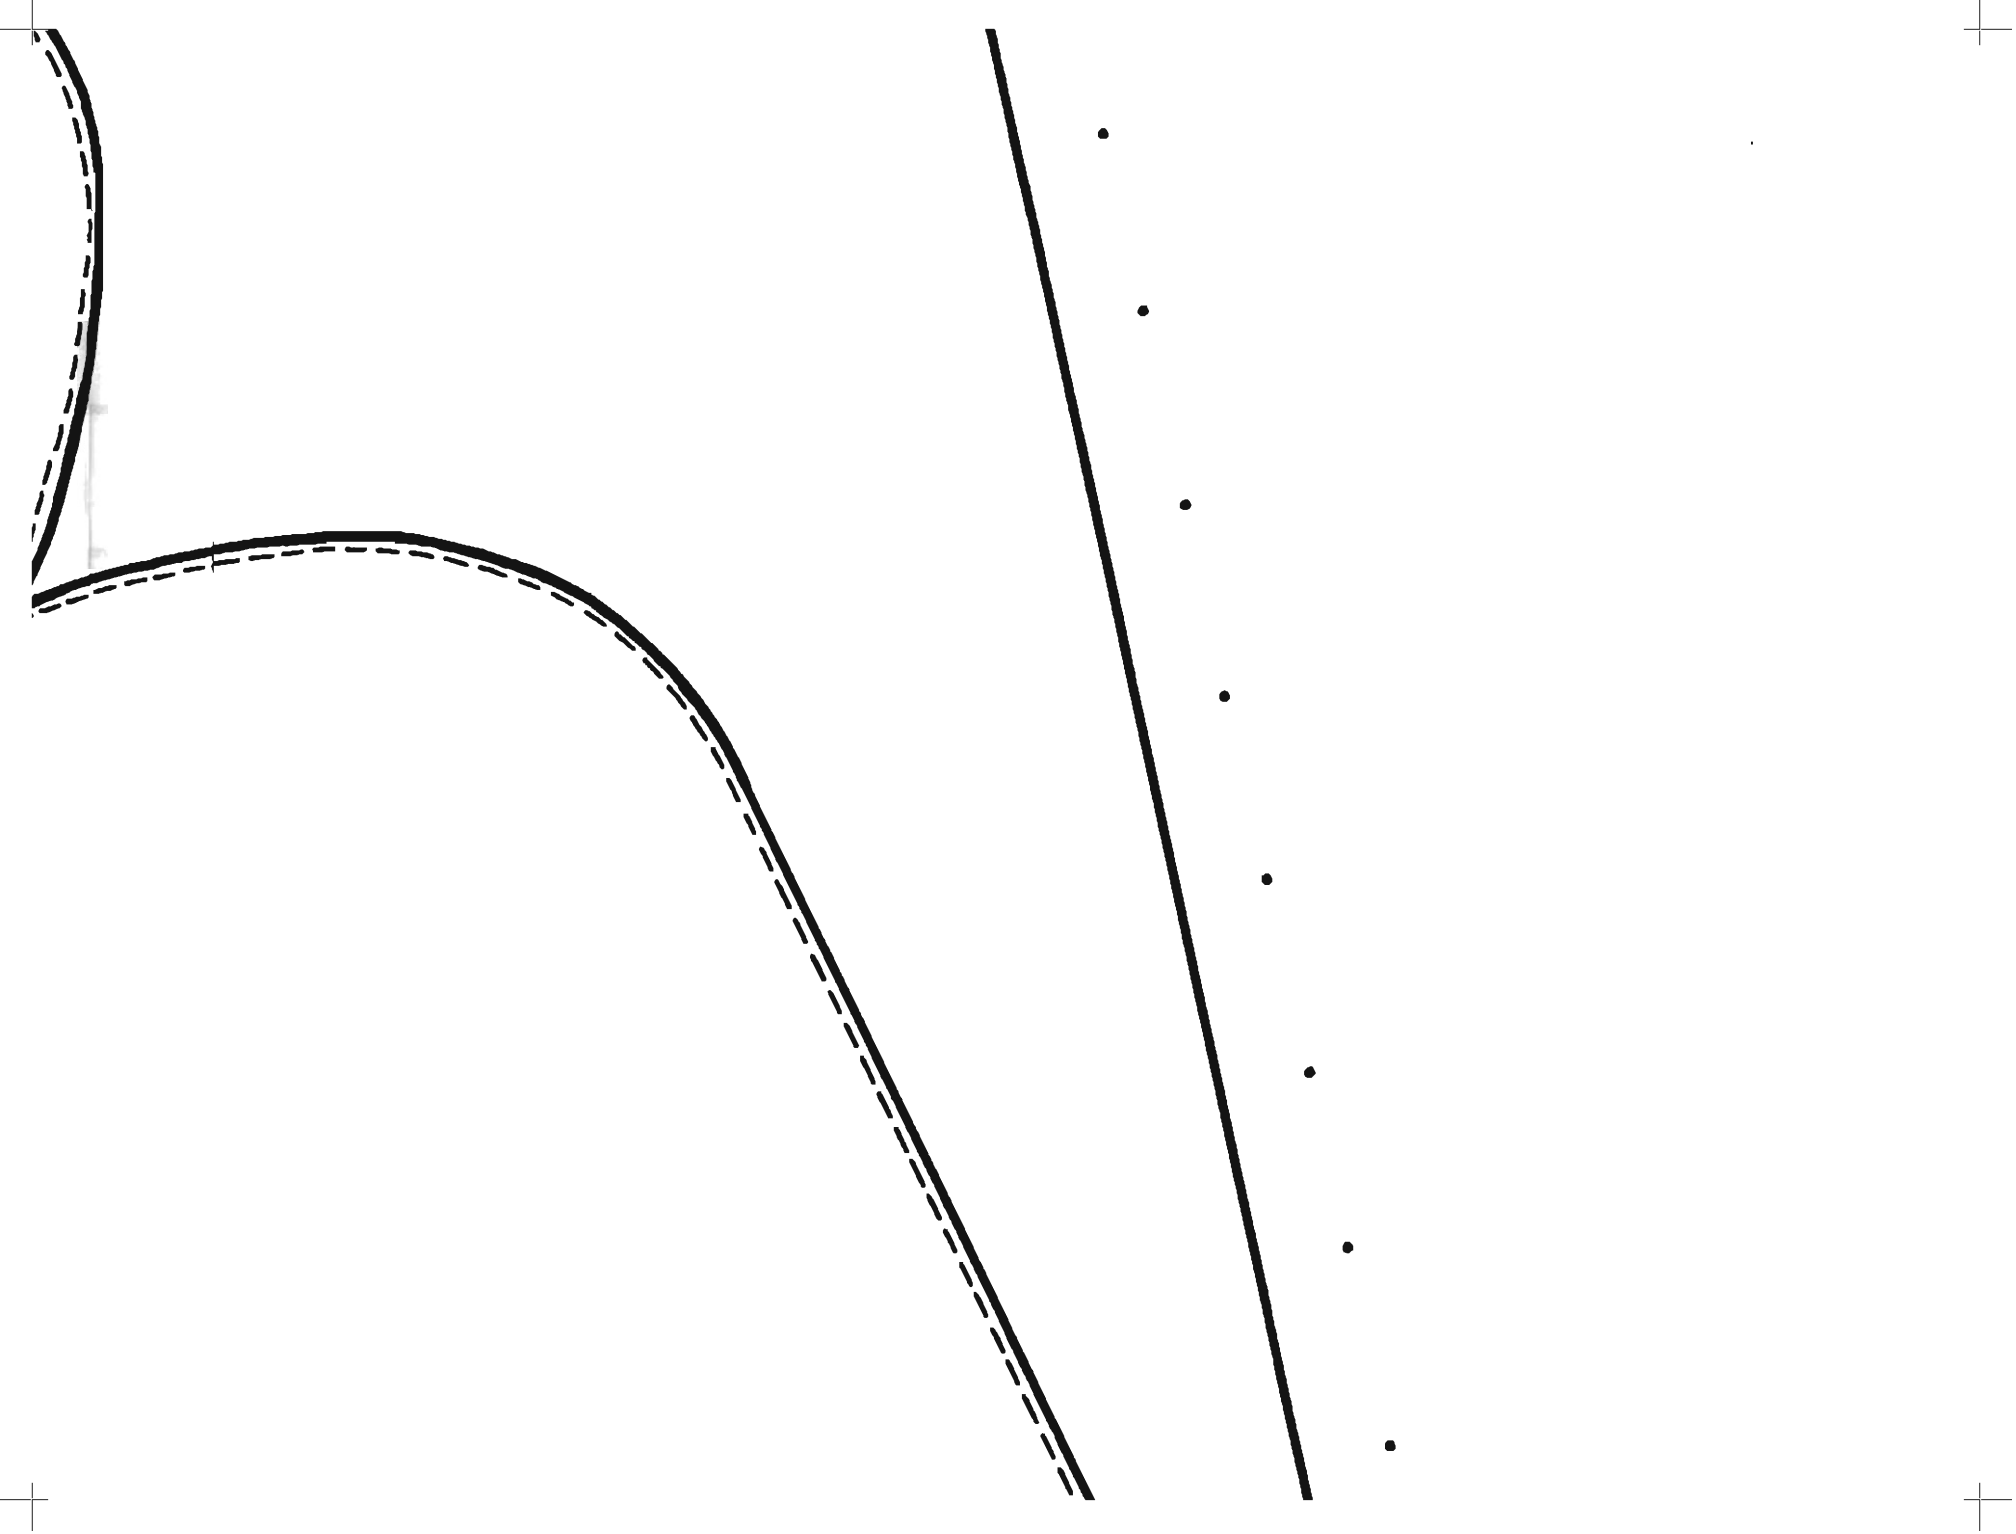

Moccasin Cow (20 ft. skin is smallest and
will make accessories, too)

•

•

•

•

•

•

•

•



