

FASHION BELTS PATTERN PAK

STOCK NUMBER 2699




Printed in the U.S.A.



PAK CONTAINS:
Patterns and Instructions for 12 Ladies Fashion Belts

Distributed by Tandy Leather Co.
Fort Worth, Texas
A Division of Tandy Crafts, Inc.

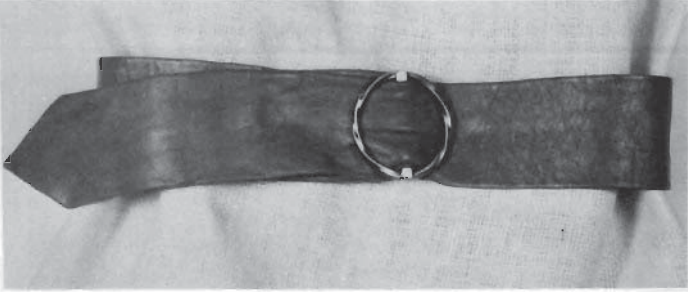



BELT NUMBER 1

SIZING: From end fold line to tip make belt waist size plus 4".

YOU WILL NEED:
Leather
1 Buckle 2"

Cement

STEP 1. Trace pattern on to paper, allowing for sizing as described above, and cut out. If you wish to line this belt, make pattern for lining on lines indicated on pattern sheet and again adjust for sizing.
STEP 2. Cut belt and lining (if used) out of desired leather.
STEP 3. If belt is to be lined, cement lining to back of belt now.
STEP 4. Apply cement to back of belt in areas indicated in grey on the pattern sheet.
STEP 5. Fold edges over at fold lines and tap down with a mallet to secure. Do not fold over buckle end yet. (You may have to cut the tip of the belt a little to make it fold smoothly.)
STEP 6. Slip buckle on end of belt to fold line and fold end over to back of belt. Tap with mallet to secure. If you wish you may stitch around belt.

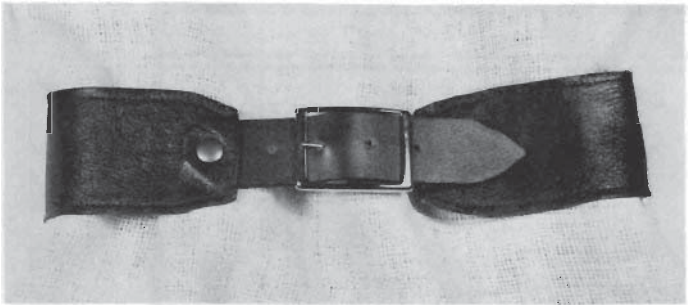
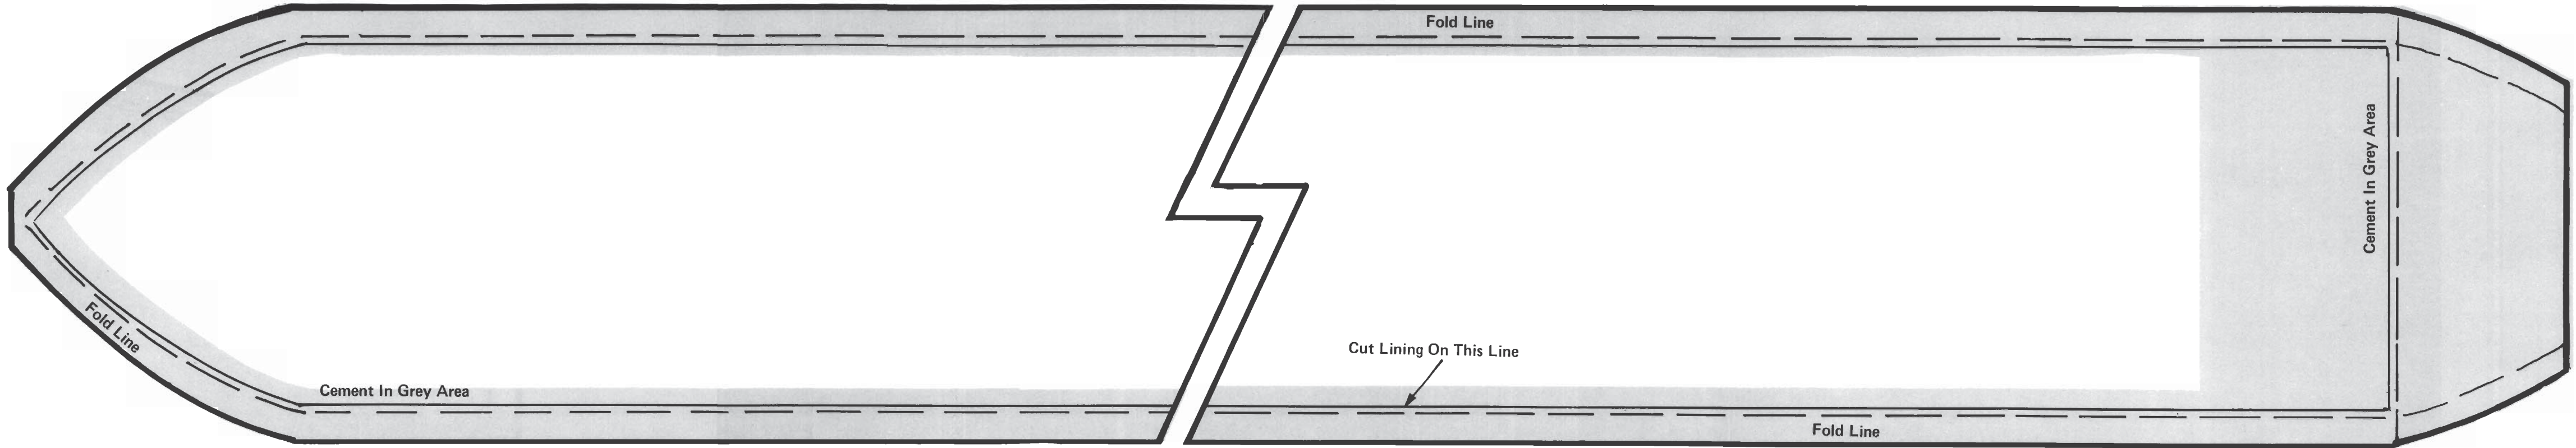


BELT NUMBER 2

SIZING: From end fold line to end fold line make belt waist size minus 3 3/4".

YOU WILL NEED:
Leather
2 Baby Dot Snaps (2 Sockets, 2 Studs & 4 Buttons)
1 Buckle 1 1/4"
1 Belt Snap (1 Socket, 1 Stud & 2 Buttons)
Cement

STEP 1. Trace pattern onto paper and cut out.
STEP 2. Cut one belt of one color leather and one of another color for reverse side. Punch holes as indicated.
STEP 3. Fold ends under at fold line aligning holes and cement.
STEP 4. Install Baby Dot Snaps in ends of belts with buttons and sockets in one belt and buttons and studs in the other belt. (Be sure buttons of snaps are on the right side of the leather.
STEP 5. Place belts together with wrong sides together and stitch along outer edges. Do not stitch across ends.
STEP 6. Cut billet and buckle tab out of 6-7 oz. leather. Cut 2 billets and dye one to match each side of the belt. Fold buckle tab in half and dye one end to match one side of the belt and the other end to match the other side of the belt.
STEP 7. Install belt snap in buckle tab with a button on each side as you did the baby dot snaps.
STEP 8. Thread buckle in buckle tab and snap belt snap. Push tab in end of belt until hole lines up with Baby Dot and snap the snap. Do the same with the billet end. To reverse the belt, just take out buckle tab and put buckle on tab opposite way.

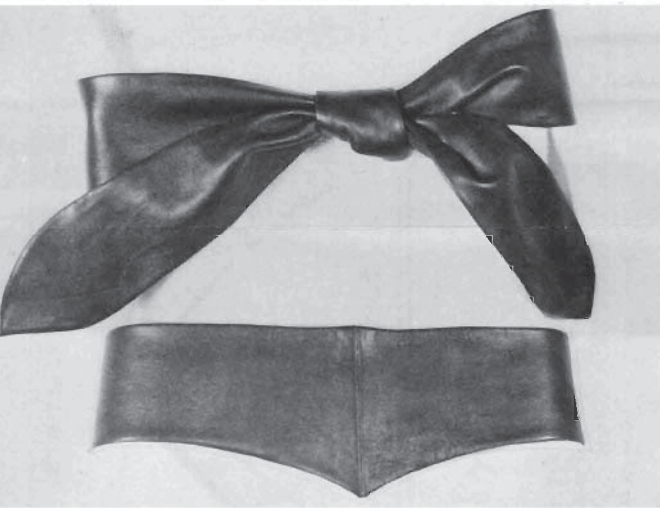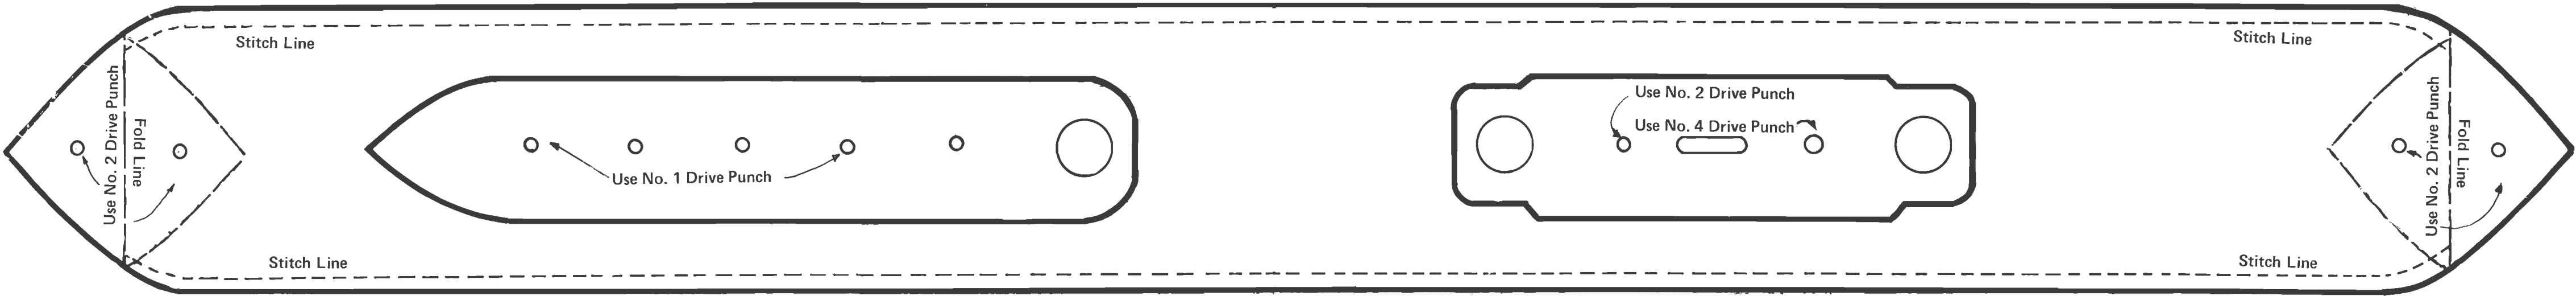


BELT NUMBER 3

SIZING: From seam line to tip make pattern 1/2 of waist size plus 12".

YOU WILL NEED:
Leather
Cement

STEP 1. Trace pattern on to paper and cut out. If you wish to line this belt, trace along lines indicated on pattern sheet.
STEP 2. Cut belt and lining out of desired leather. You will need 2 of each (1 left then flop pattern and make 1 right).
STEP 3. Stitch two pieces of belt together along stitch line indicated on pattern, with right sides together. Do the same with lining. Tap seams open to flatten.
STEP 4. Cement lining to back of belt now.
STEP 5. Apply cement to back of belt in areas indicated in grey on pattern.
STEP 6. Fold edges over at fold lines and tap down with a mallet to secure.
STEP 7. If you wish you may stitch around the edges of the belt.
STEP 8. Patterns are given for two different tips for this belt. If you wish to use them, simply trace them onto pattern at alternate tip lines.

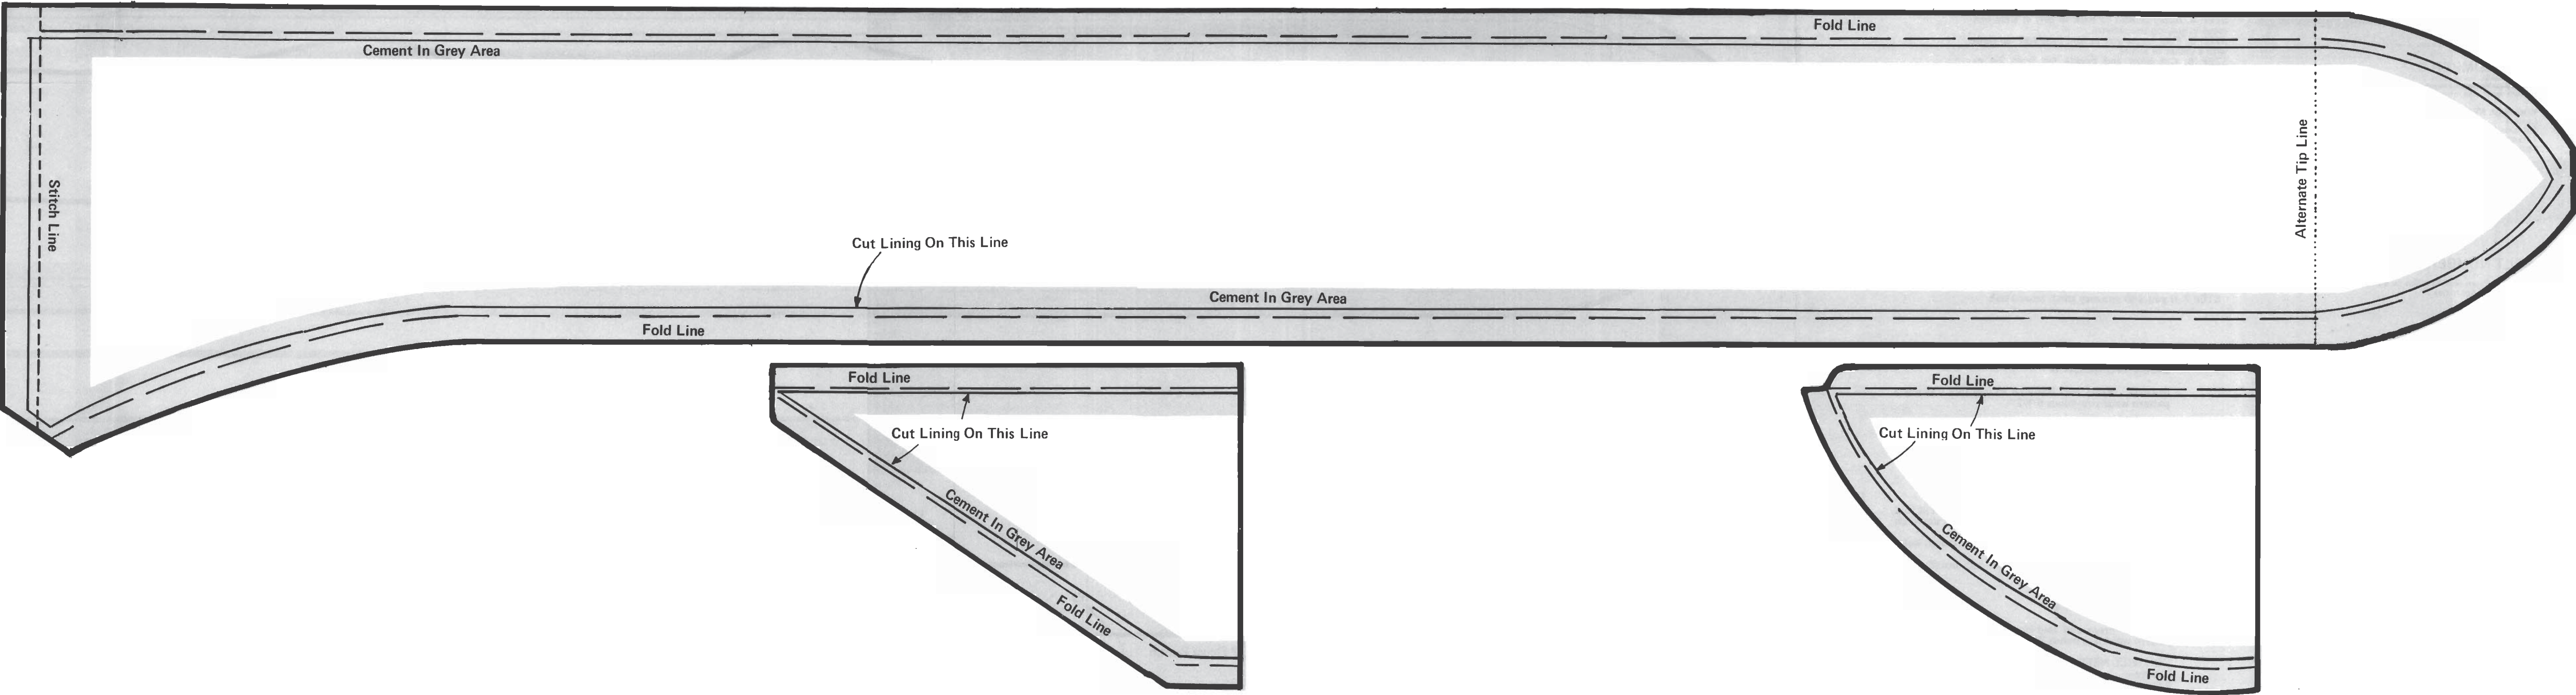



BELT NUMBER 4

SIZING: From seam line to end of fringe make belt 1/2 waist size plus 24".

YOU WILL NEED:
Leather
Cement

STEP 1. Trace pattern on to paper and cut out.
STEP 2. Cut belt out of desired leather. You will need 2 pieces (one left then flop pattern and cut 1 right).
STEP 3. Overlap the pieces at back about 1/4" and cement together. You may stitch here if you wish.
STEP 4. Cut fringe on each end.
STEP 5. For added strength and body you may wish to stitch around the belt.

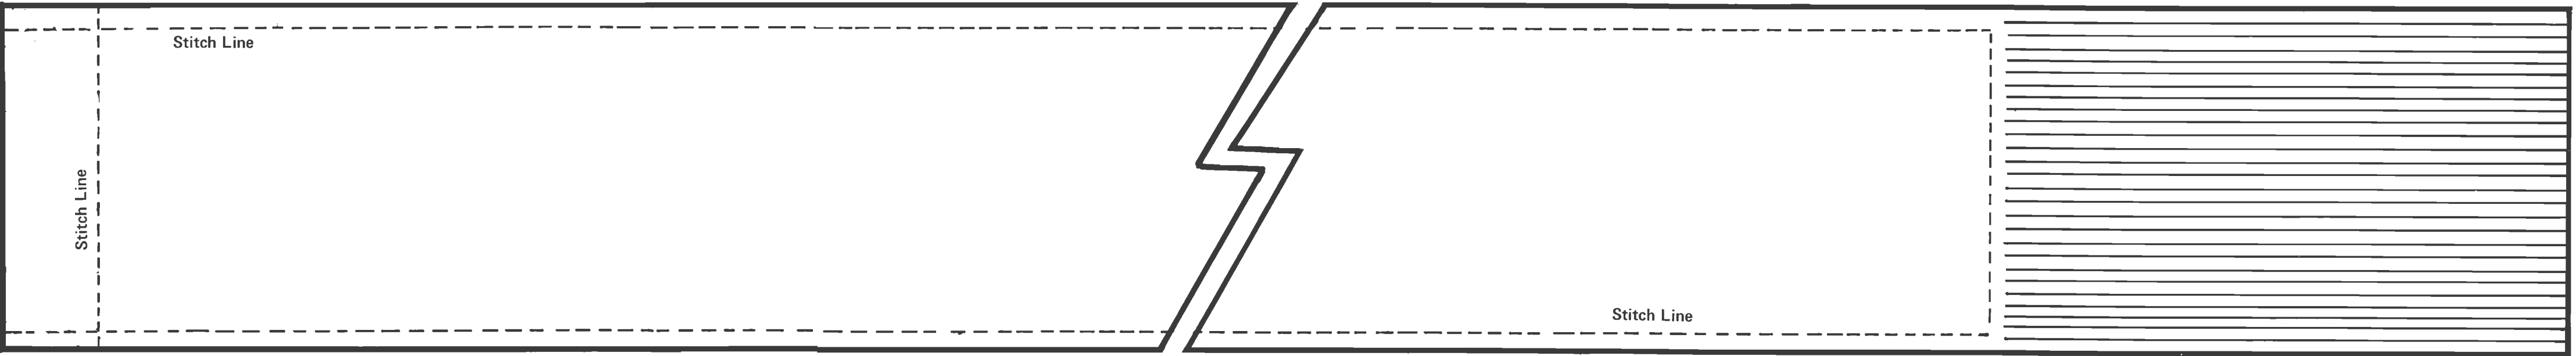

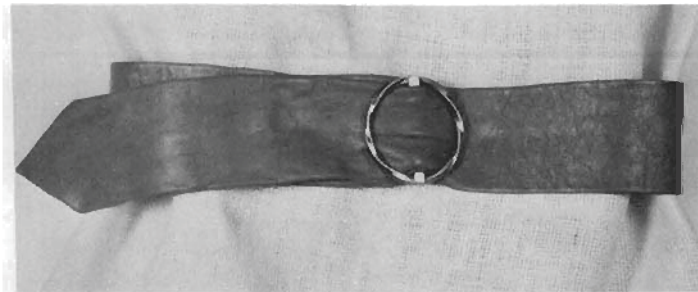

BELT NUMBER 1

SIZING: From end fold line to tip make belt waist size plus 4".

YOU WILL NEED:

Leather
1 Buckle 2"
Cement

STEP
as des
this be
pattern
STEP
leather
STEP
of belt
STEP
cated i
STEP
with a
yet. (N
to mak
STEP
fold e
secure.

1. Trace pattern on to paper, allowing for sizing indicated above, and cut out. If you wish to line it, make pattern for lining on lines indicated on pattern sheet and again adjust for sizing.


2. Cut belt and lining (if used) out of desired material.



3. If belt is to be lined, cement lining to back of pattern now.


4. Apply cement to back of belt in areas indicated in grey on the pattern sheet.

5. Fold edges over at fold lines and tap down with mallet to secure. Do not fold over buckle end (you may have to cut the tip of the belt a little to make it fold smoothly.)


6. Slip buckle on end of belt to fold line and fold over to back of belt. Tap with mallet to secure. If you wish you may stitch around belt.

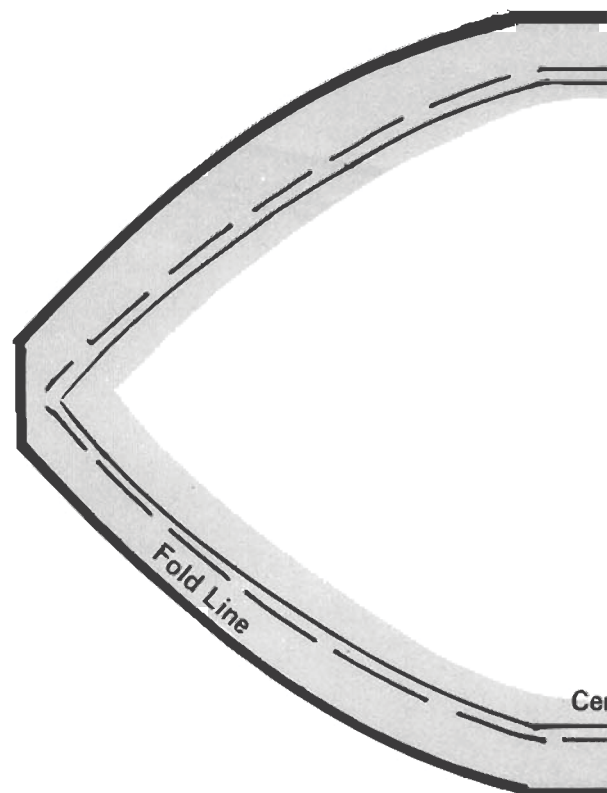


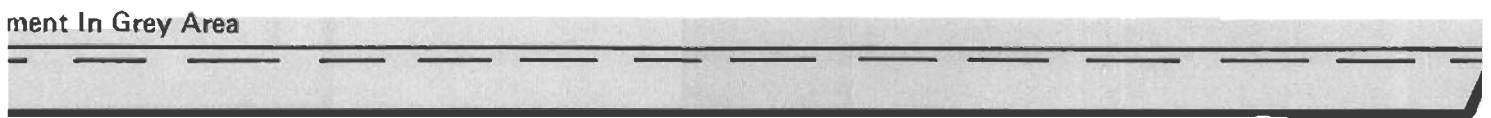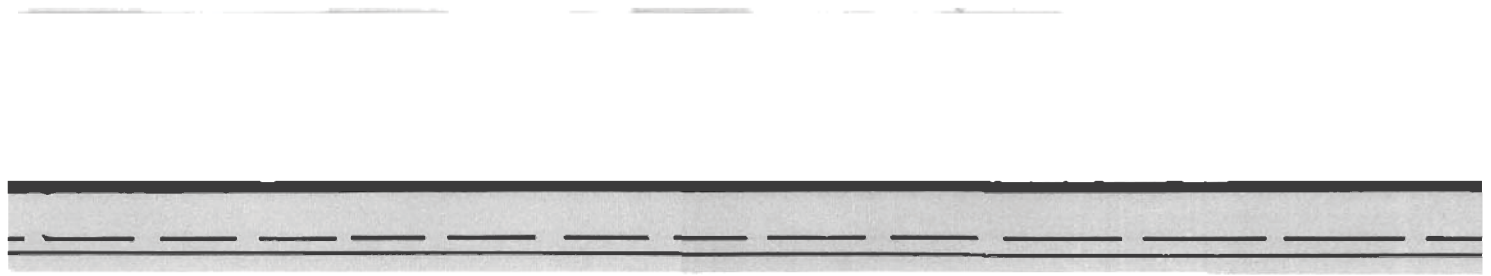

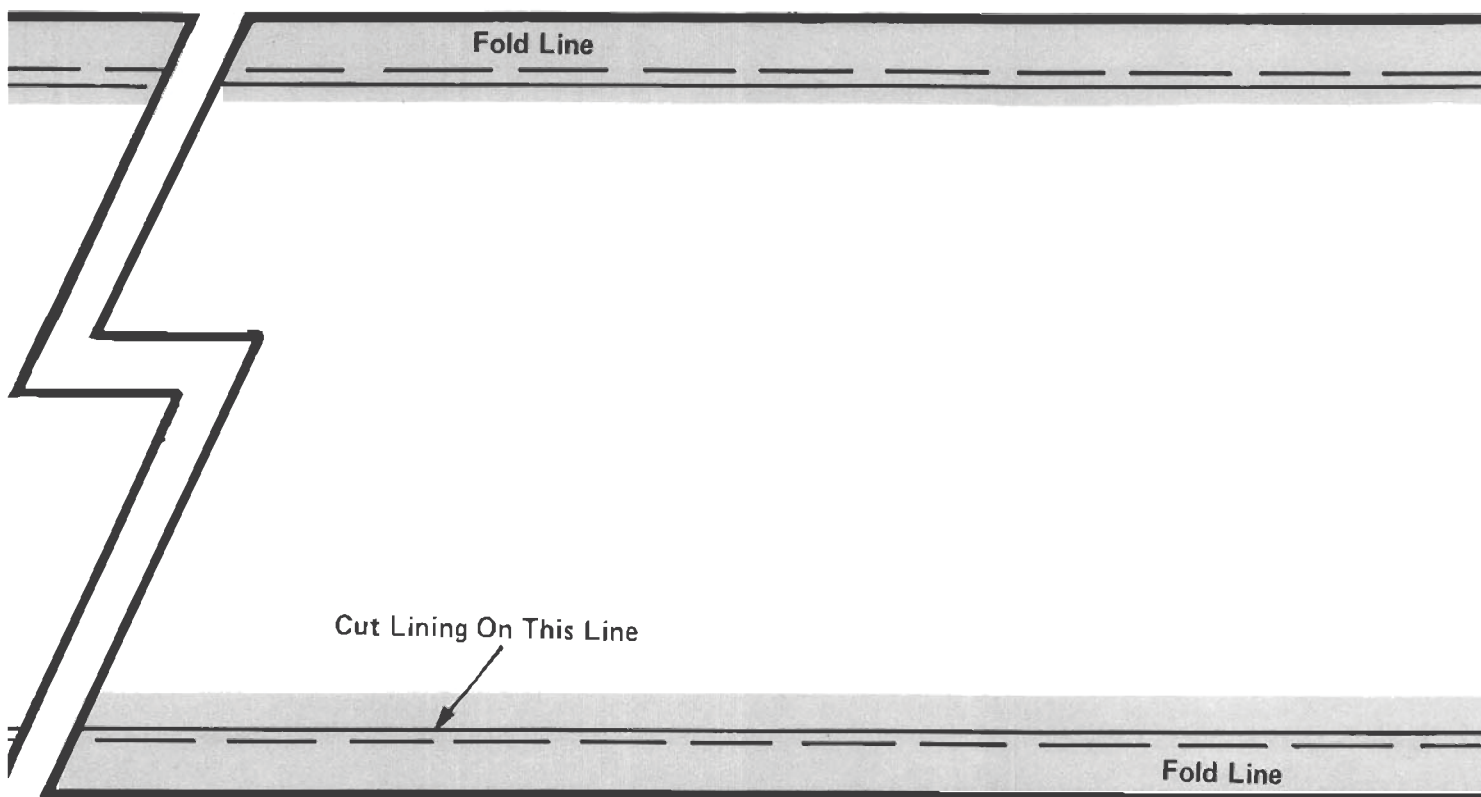

STOCK NO. 2699

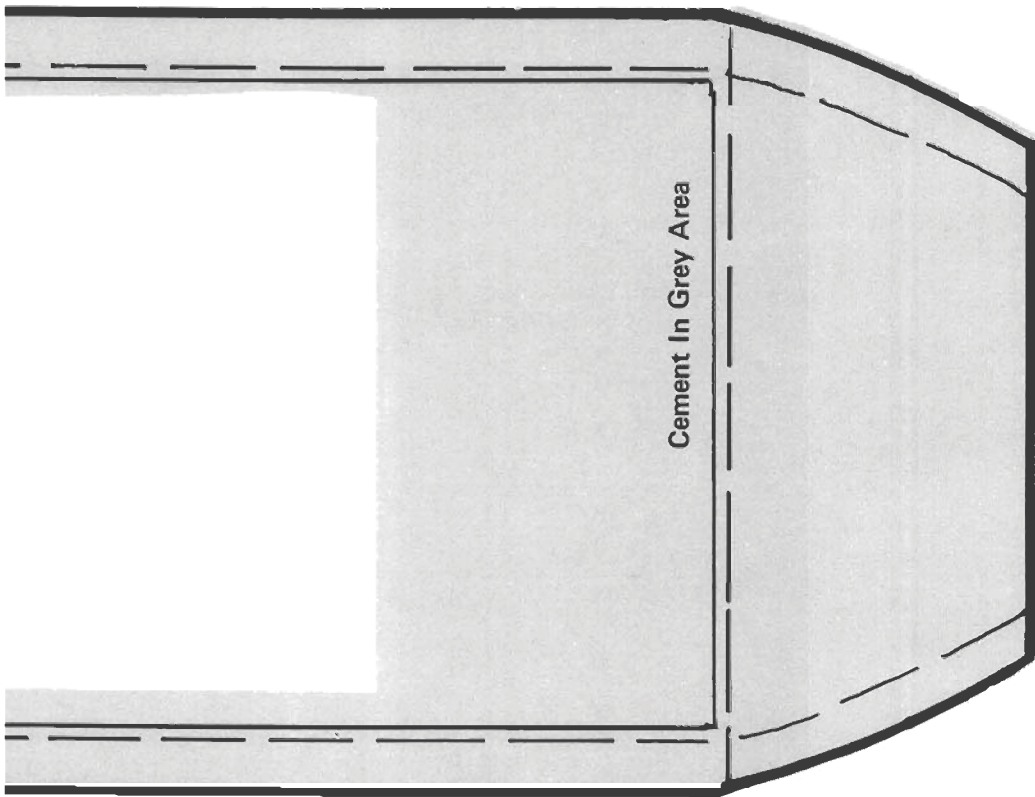

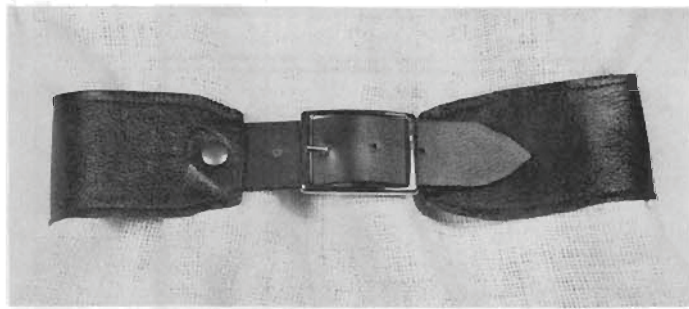


BELT NUMBER 2

SIZING: From end fold line to end fold line make belt waist size minus $3\frac{3}{4}$ ".

YOU WILL NEED:

Leather
2 Baby Dot Snaps (2 Sockets, 2 Studs & 4 Buttons)
1 Buckle $1\frac{1}{4}$ "
1 Belt Snap (1 Socket, 1 Stud & 2 Buttons)
Cement

STEP 1
STEP 2
another
STEP 3
and cer
STEP 4
buttons
in the
right si
STEP 5
and stit
STEP 6
leather.
of the l
to mat
match 1
STEP 7
on each
STEP 8
snap. P
Baby C
billet e
tab and

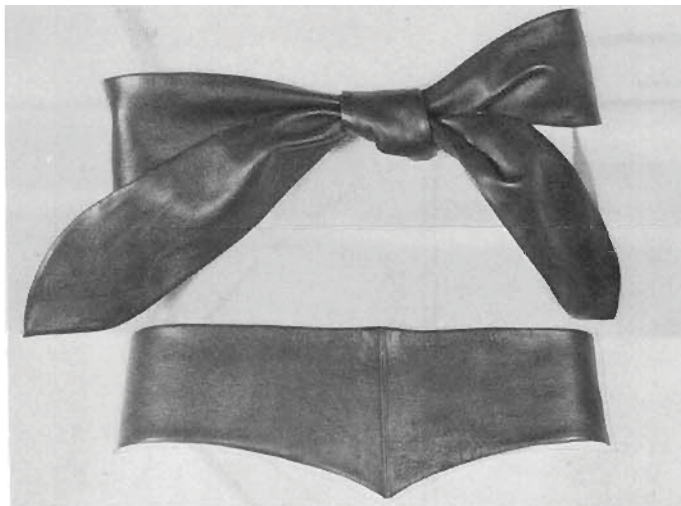

BELT NUMBER 3

SIZING: From seam line to tip make pattern $\frac{1}{2}$ of waist size plus 12".

YOU WILL NEED:

Leather
Cement



STEP 1. Trace pattern on to paper and cut out. If you wish to line this belt, trace along lines indicated on pattern sheet.




STEP 2. Cut belt and lining out of desired leather. You will need 2 of each (1 left then flop pattern and make 1 right).


STEP 3. Stitch two pieces of belt together along stitch line indicated on pattern, with right sides together. Do the same with lining. Tap seams open to flatten.

STEP 4. Cement lining to back of belt now.

1. Trace pattern onto paper and cut out.
2. Cut one belt of one color leather and one of r color for reverse side. Punch holes as indicated.
3. Fold ends under at fold line aligning holes nent.
4. Install Baby Dot Snaps in ends of belts with s and sockets in one belt and buttons and studs other belt. (Be sure buttons of snaps are on the de of the leather.
5. Place belts together with wrongsides together ch along outer edges. Do not stitch across ends.
6. Cut billet and buckle tab out of 6-7 oz. Cut 2 billets and dye one to match each side belt. Fold buckle tab in half and dye one end ch one side of the belt and the other end to the other side of the belt.
7. Install belt snap in buckle tab with a button i side as you did the baby dot snaps.
8. Thread buckle in buckle tab and snap belt ush tab in end of belt until hole lines up with ot and snap the snap. Do the same with the nd. To reverse the belt, just take out buckle l put buckle on tab opposite way.

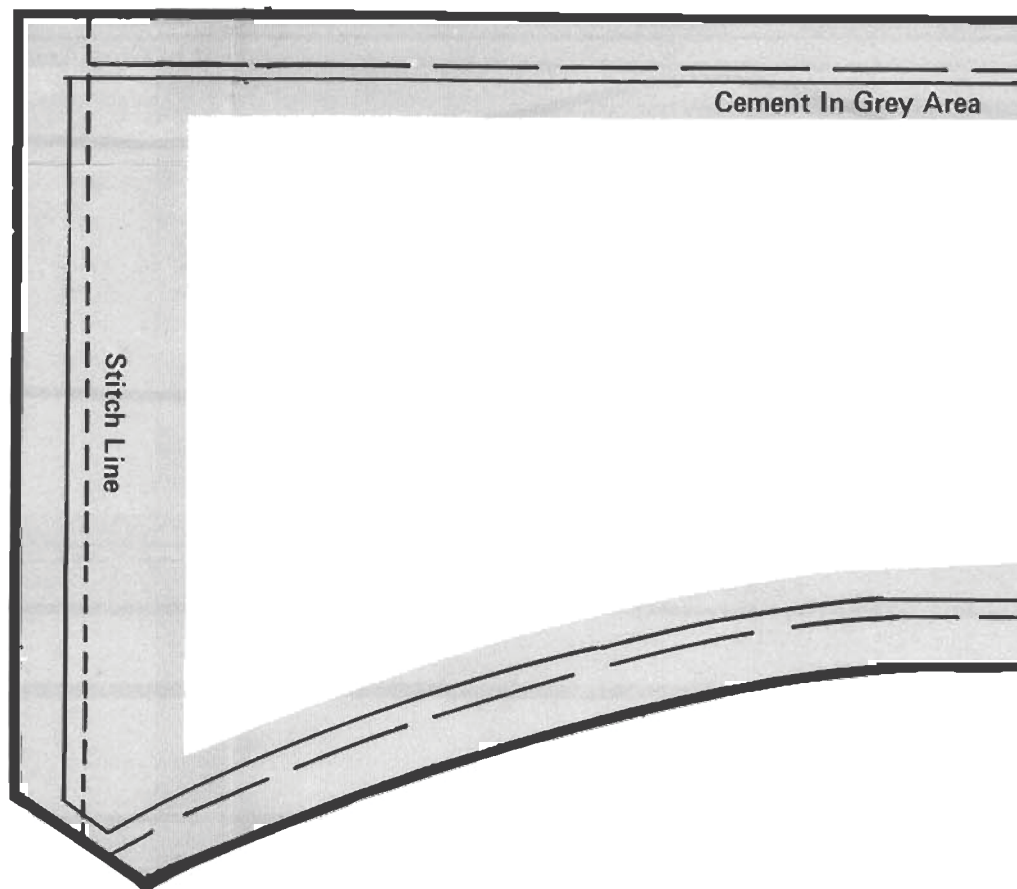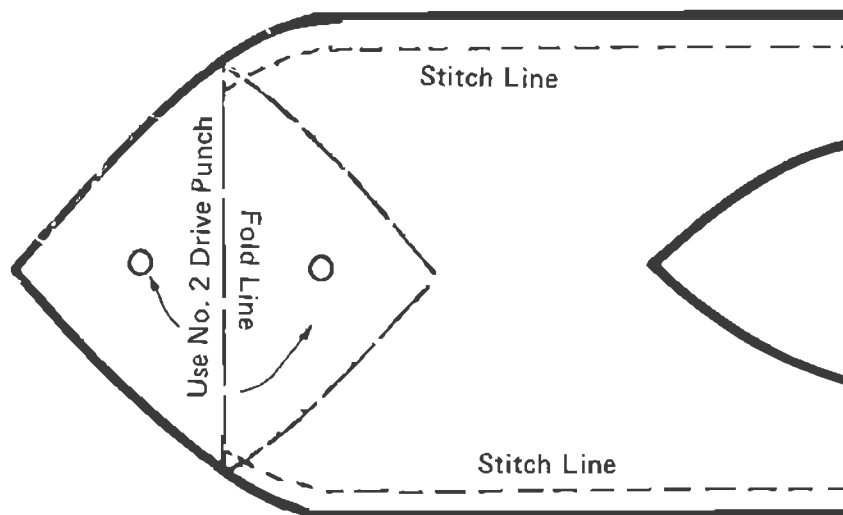

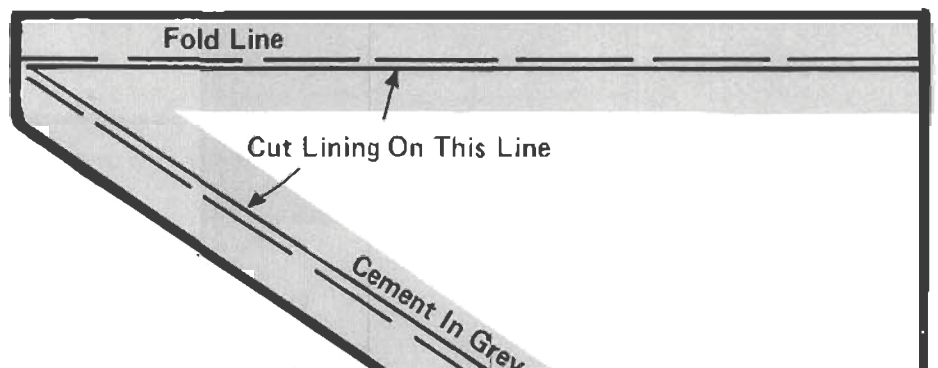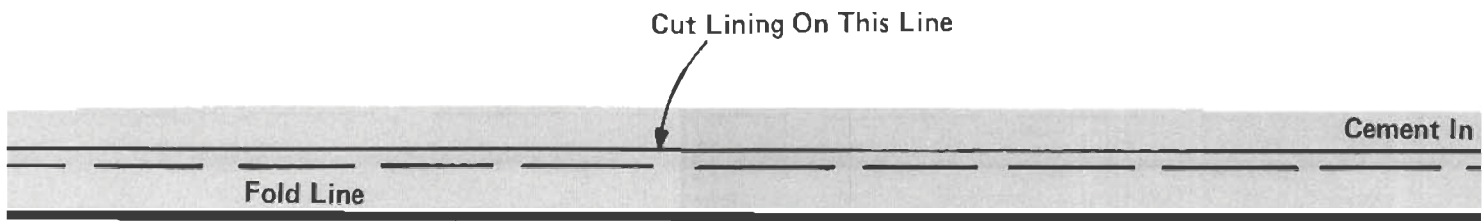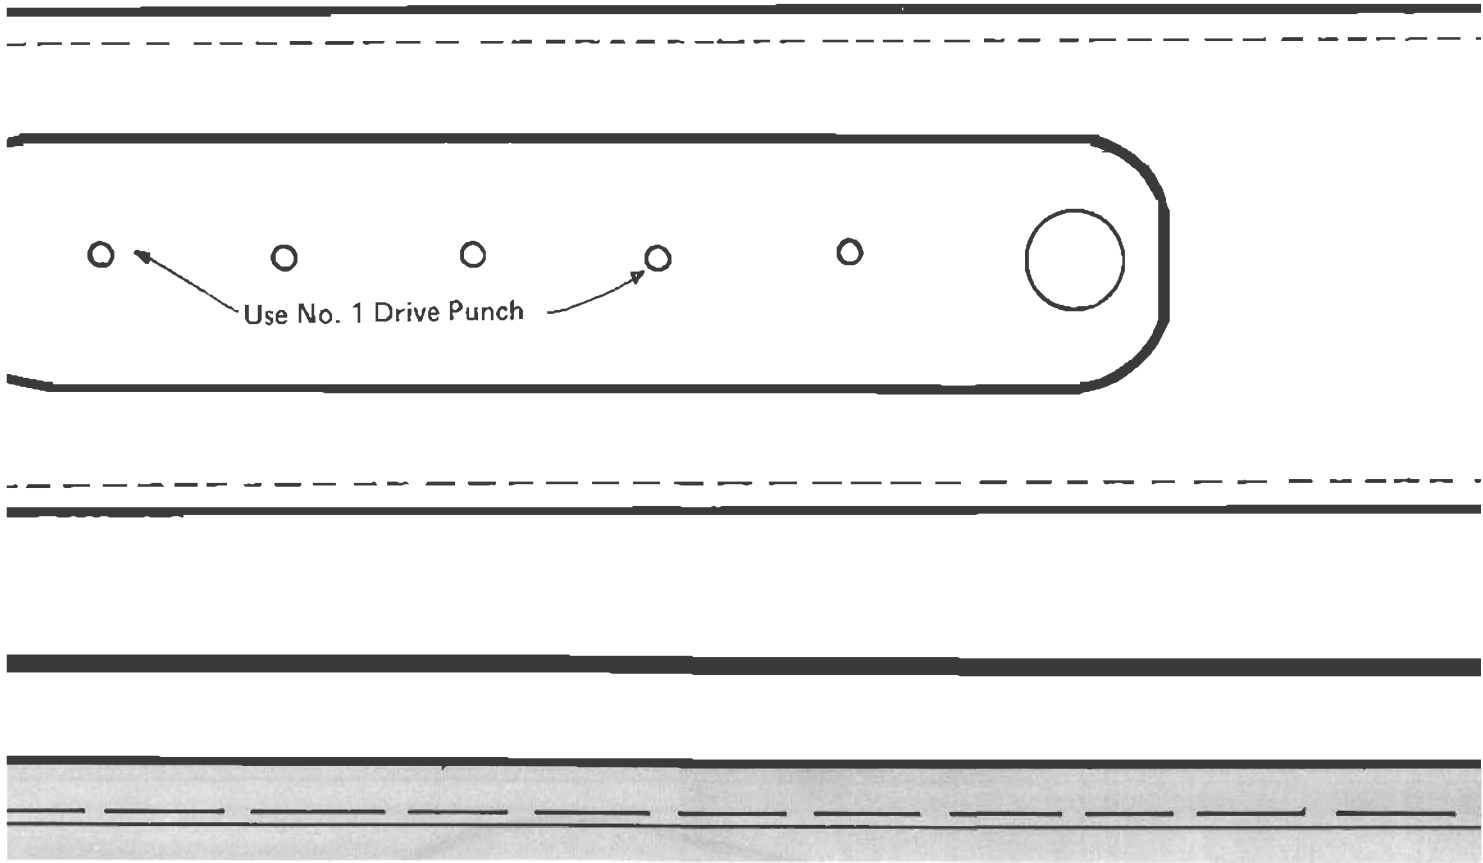

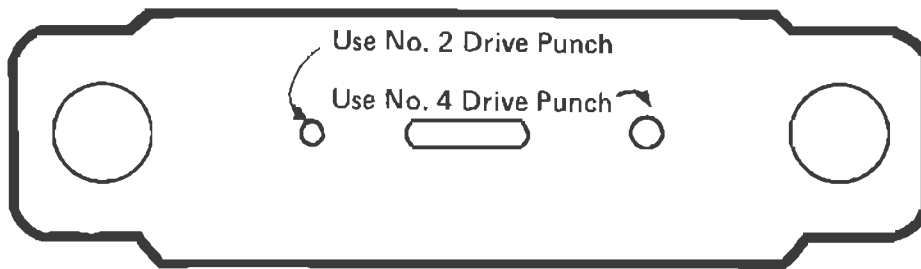

Fold Line

Grey Area

Fold Line

Cut Lining On This Line

Cement

Stitch Line

Use No. 2 Drive Punch

Fold Line

Stitch Line

Alternate Tip Line

STEP 5. Apply cement to back of belt in areas indicated in grey on pattern.

STEP 6. Fold edges over at fold lines and tap down with a mallet to secure.

STEP 7. If you wish you may stitch around the edges of the belt.

STEP 8. Patterns are given for two different tips for this belt. If you wish to use them, simply trace them onto pattern at alternate tip lines.



STEP 1.
STEP 2.
need 2 |
1 right).
STEP 3.
cement t
STEP 4.
STEP 5.
to stitch

BELT NUMBER 4

SIZING: From seam line to end of fringe make belt $\frac{1}{2}$ waist size plus 24".

YOU WILL NEED:

Leather
Cement


Trace pattern on to paper and cut out.


Cut belt out of desired leather. You will need two pieces (one left then flop pattern and cut

Overlap the pieces at back about 1/4" and together. You may stitch here if you wish.


Cut fringe on each end.

For added strength and body you may wish to stitch around the belt.

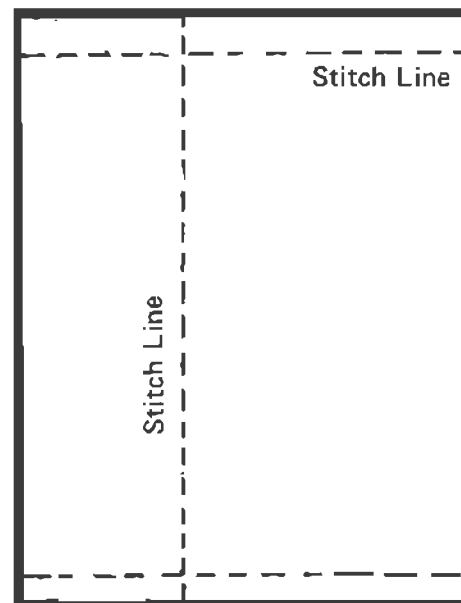

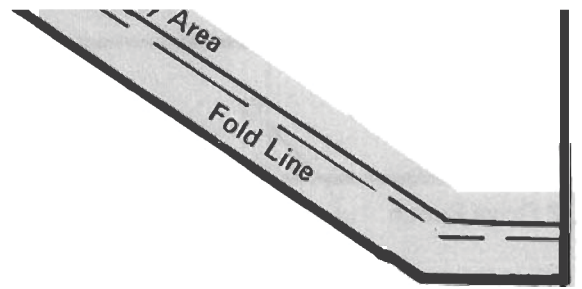

ent In Grey A

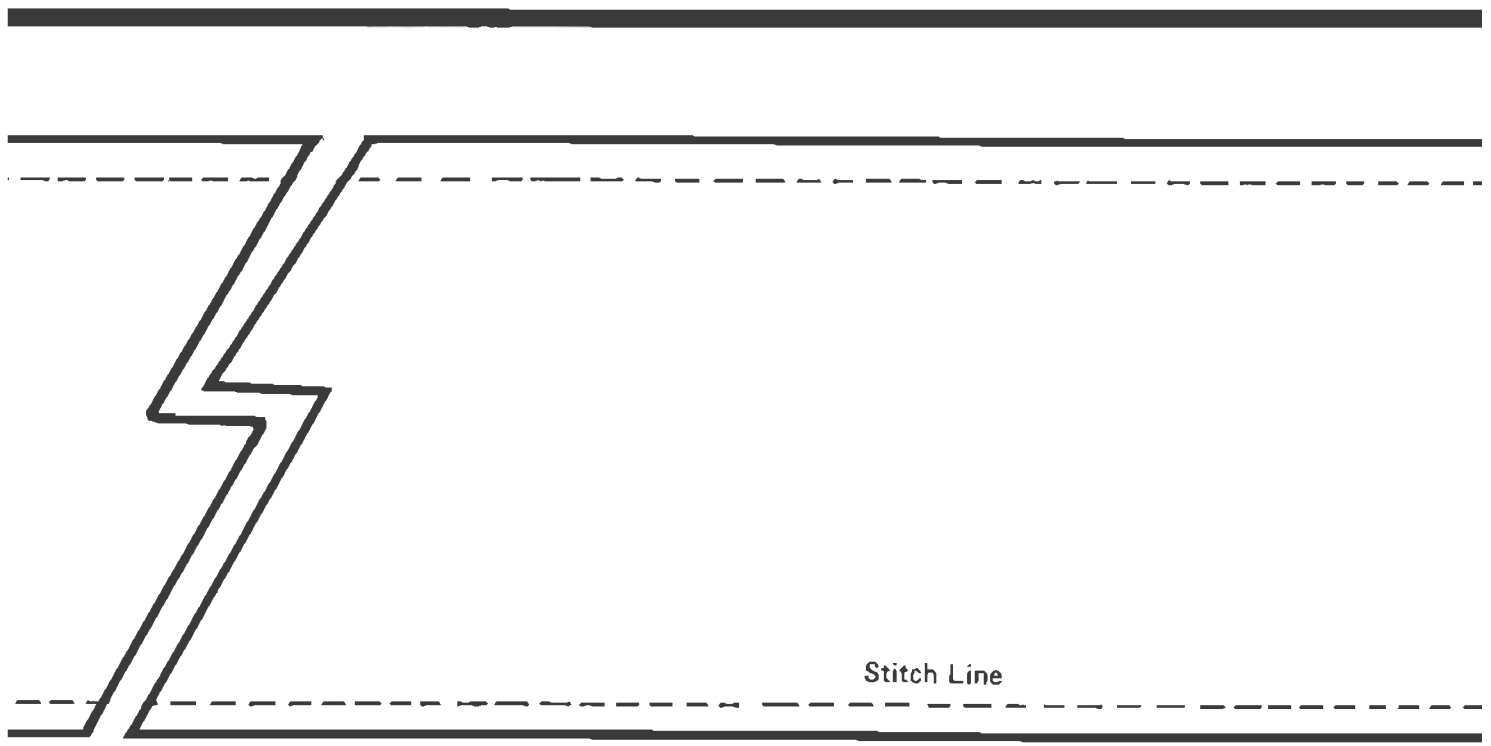

A diagram showing a curved fold line in a material. The fold line is labeled "Fold Line". The material is shown as a curved strip with a dashed line indicating the fold. The word "area" is partially visible on the left side.

A diagram showing a curved fold line in a material. The fold line is labeled "Fold Line". The material is shown as a curved strip with a dashed line indicating the fold. The word "area" is partially visible on the left side.

[illegible]




BELT NUMBER 5

SIZING: From seam line to tip make pattern 1/2 of waist size plus 13”.


YOU WILL NEED:
Leather
Cement

Follow instructions given for belt 3.

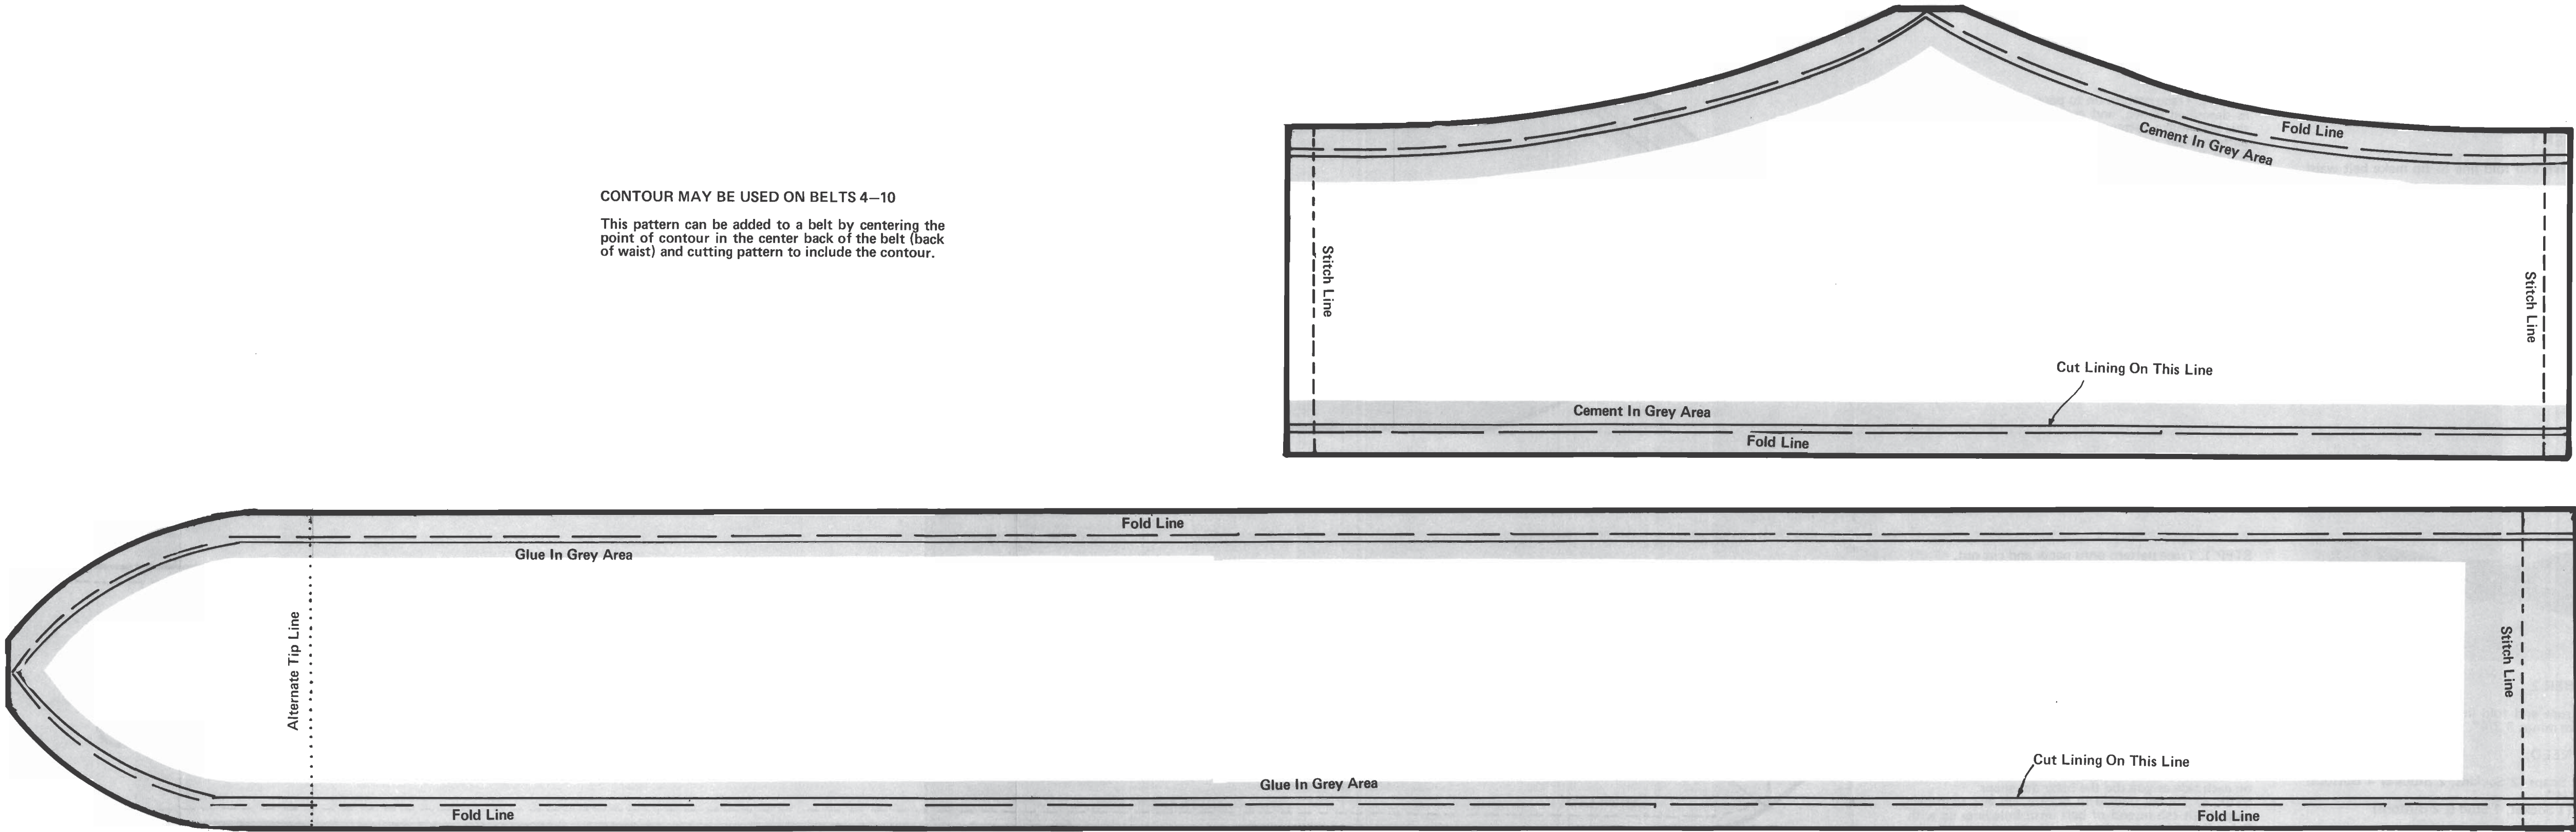

CONTOUR MAY BE USED ON BELTS 4–10


This pattern can be added to a belt by centering the point of contour in the center back of the belt (back of waist) and cutting pattern to include the contour.

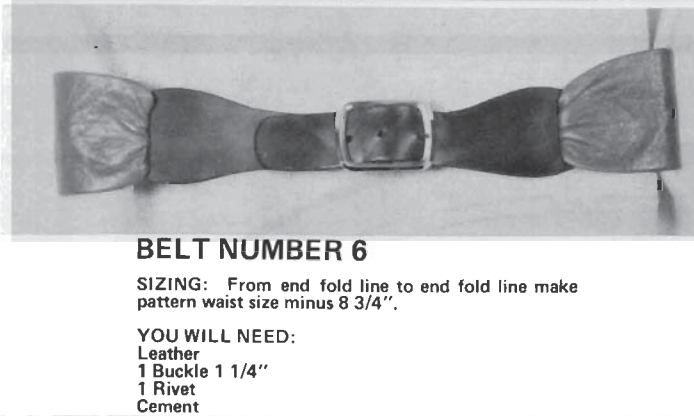

BELT NUMBER 6

SIZING: From end fold line to end fold line make pattern waist size minus 8 3/4”.

YOU WILL NEED:
Leather
1 Buckle 1 1/4”
1 Rivet
Cement

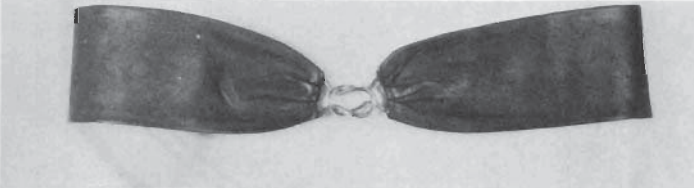



BELT NUMBER 7

SIZING: From end fold line to end fold line make pattern waist size minus 2”.

YOU WILL NEED:
Leather
1 Braided Buckle 1”
Cement

STEP 1. Trace pattern on to paper and cut out. If you wish to line this belt, trace along lines indicated on pattern.
STEP 2. Cut belt and lining out of desired leather.
STEP 3. If belt is to be lined, cement lining to back of belt now.
STEP 4. Apply cement to back of belt in areas indicated in gray on the pattern.
STEP 5. Fold edges over at fold lines and tap down with a mallet to secure.
STEP 6. Cut billet and buckle tab from 3-4 oz. leather. Punch holes and cut slots as indicated and dye desired color.
STEP 7. Attach buckle to buckle tab and install rivet.
STEP 8. Slip end of belt through slots in billet and buckle tab, fold ends over and cement to back side. Tap down to secure.
STEP 9. If you wish you may stitch around belt.

Follow steps 1-5 of belt 6.
STEP 6. Thread one end of belt through one side of buckle. Fold belt end over and cement to back of belt. Repeat on other end with other buckle side.
STEP 7. If you wish you may stitch around belt.

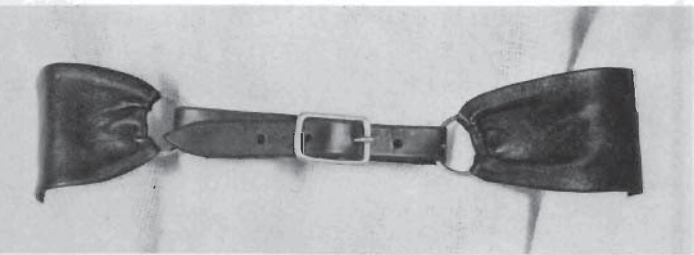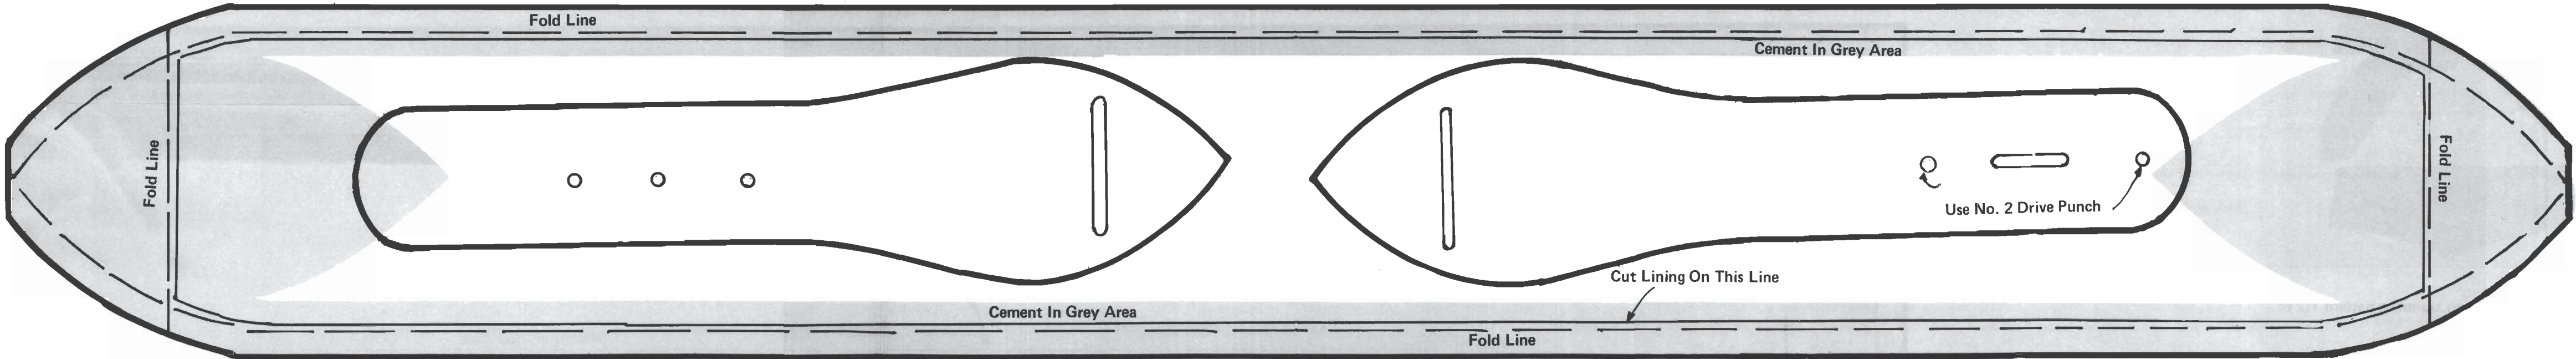

BELT NUMBER 8

SIZING: From end fold line to end fold line make pattern waist size minus 6 1/2”.

YOU WILL NEED:
Leather
2 Dee Rings 1 1/4”
1 Buckle 1”
1 Rivet
Cement



Follow steps 1-5 of belt 6.
STEP 6. Place 1 1/4” dee ring on end of belt at fold line and fold end through ring. Cement end down on reverse side of belt and tap down to secure.
STEP 7. Cut billet from 5-7 oz. leather. Punch holes as indicated and dye to match belt.
STEP 8. Attach buckle to belt and install rivet. Thread billet through dee rings.

BELT NUMBER 9

SIZING: From end fold line to end fold line make pattern waist size minus 3”.

YOU WILL NEED:
Leather
2 Dee Rings 1 1/4”
Cement

Follow steps 1-5 of belt 8.
STEP 7. For tie, cut a strip of leather 1/2” wide and 30” long. Apply cement to back side and fold down the center lengthwise. Tap with mallet to secure.
STEP 8. If you wish you may stitch around belt.

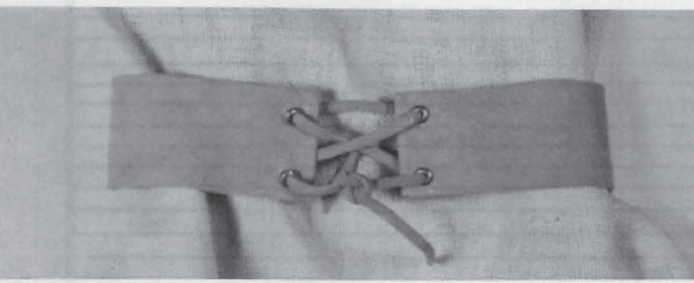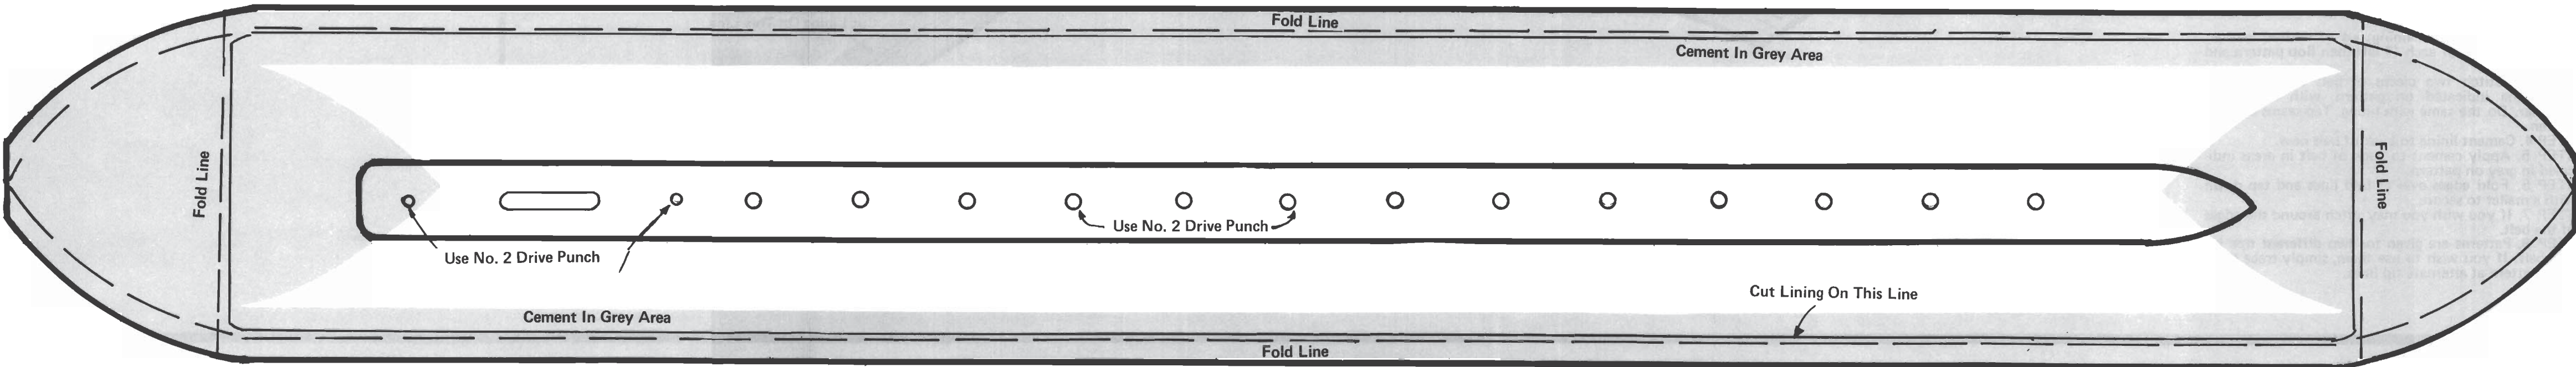



BELT NUMBER 10



SIZING: From end fold line to end fold line make pattern waist size minus 4”.



YOU WILL NEED:
Leather
4 Eyelets
Cement


Follow steps 1 through 5 of belt 6.
STEP 6. Fold ends over at fold line, aligning holes and cement down to back of belt.
STEP 7. Install eyelets in holes in ends of belt.
STEP 8. For tie, cut a strip of leather 1/2” wide and 30” long. Apply cement to back side and fold down the center lengthwise. Tap with mallet to adhere.
STEP 9. If you wish you may stitch around the edges of the belt.

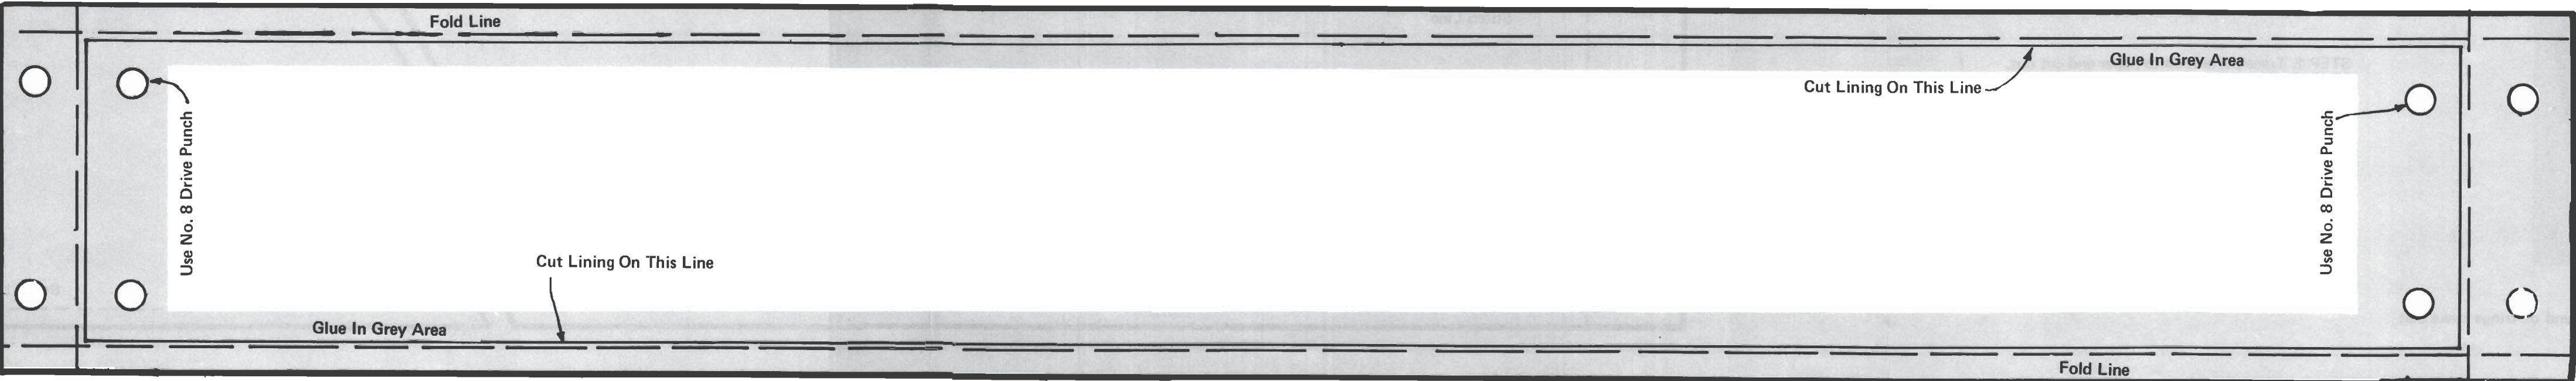


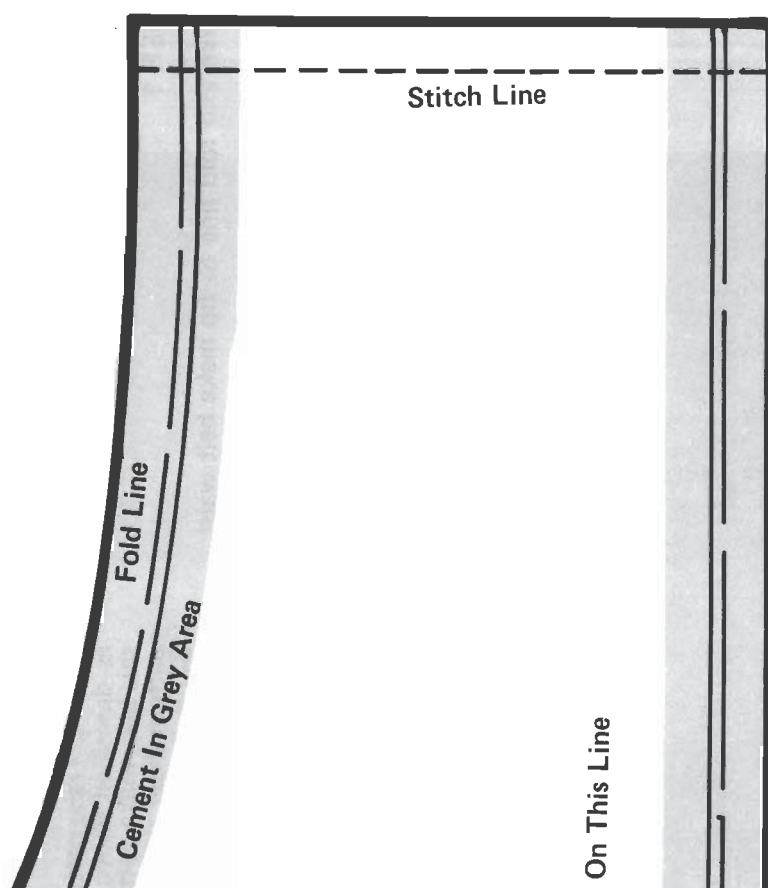

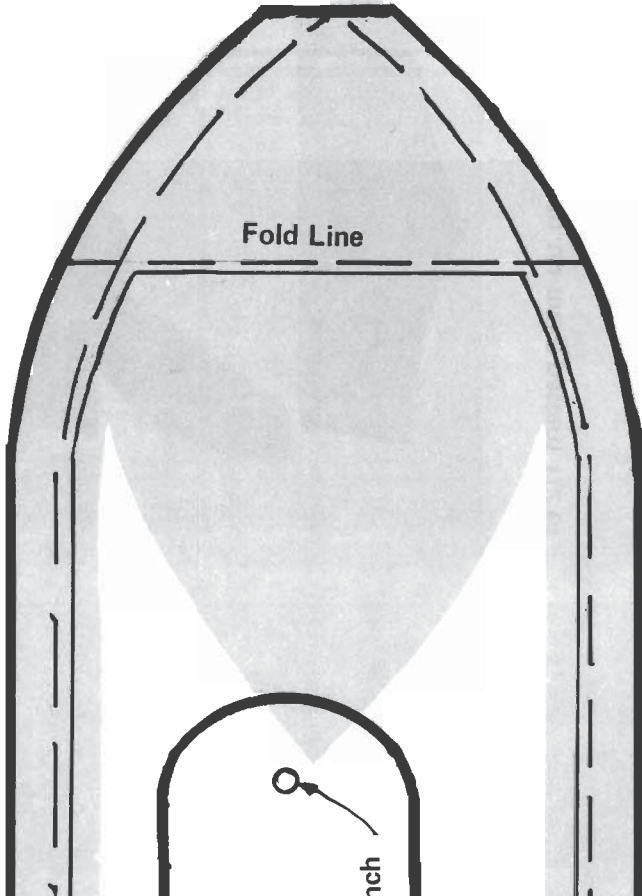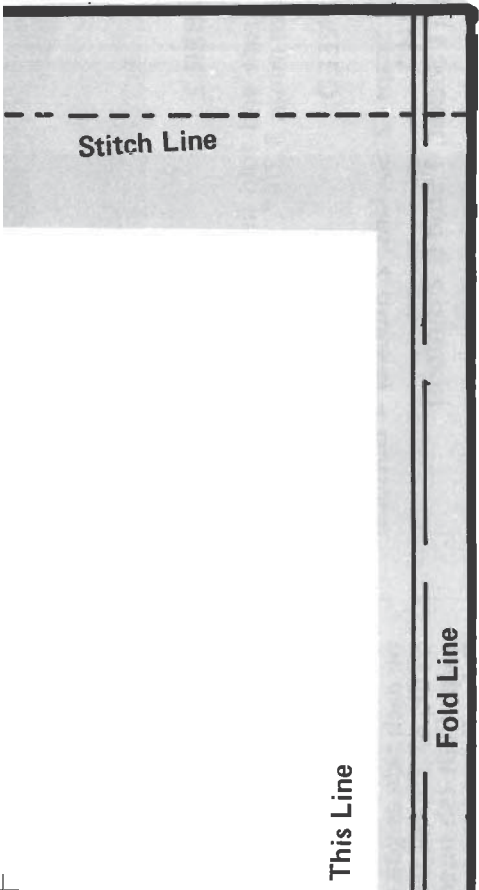

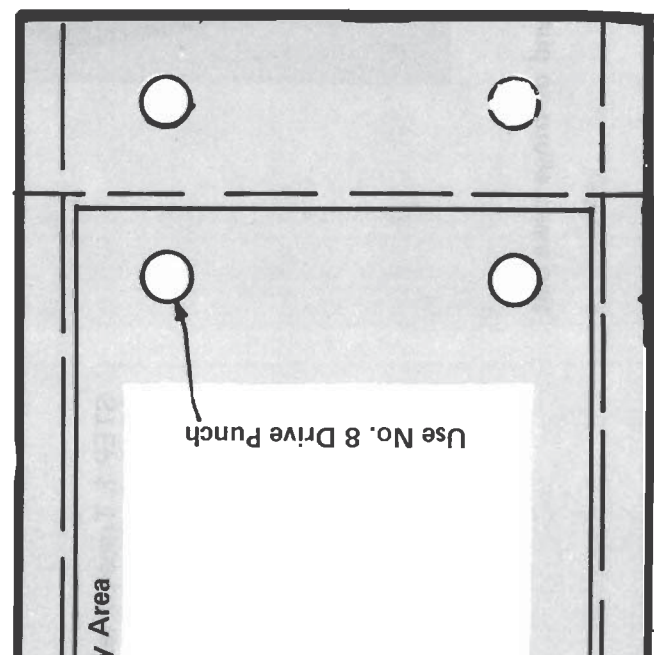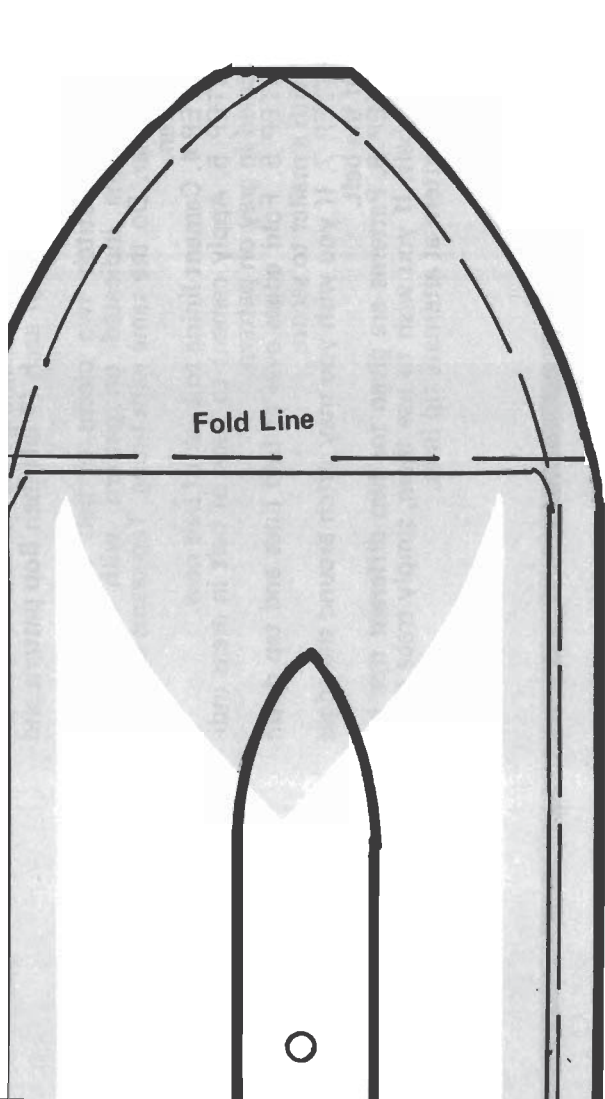

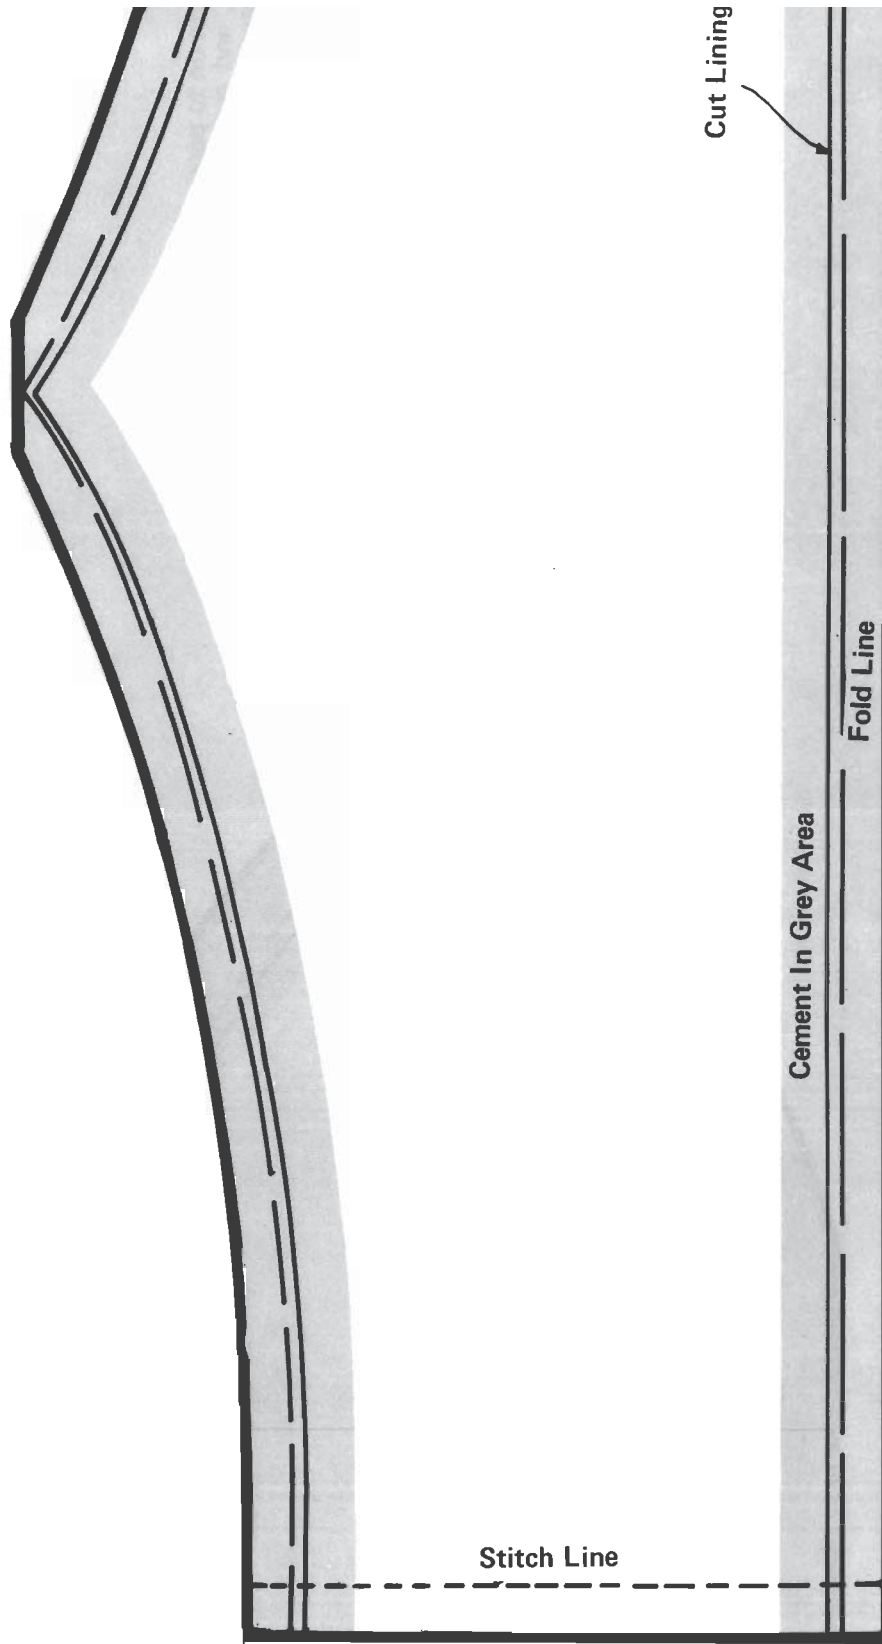

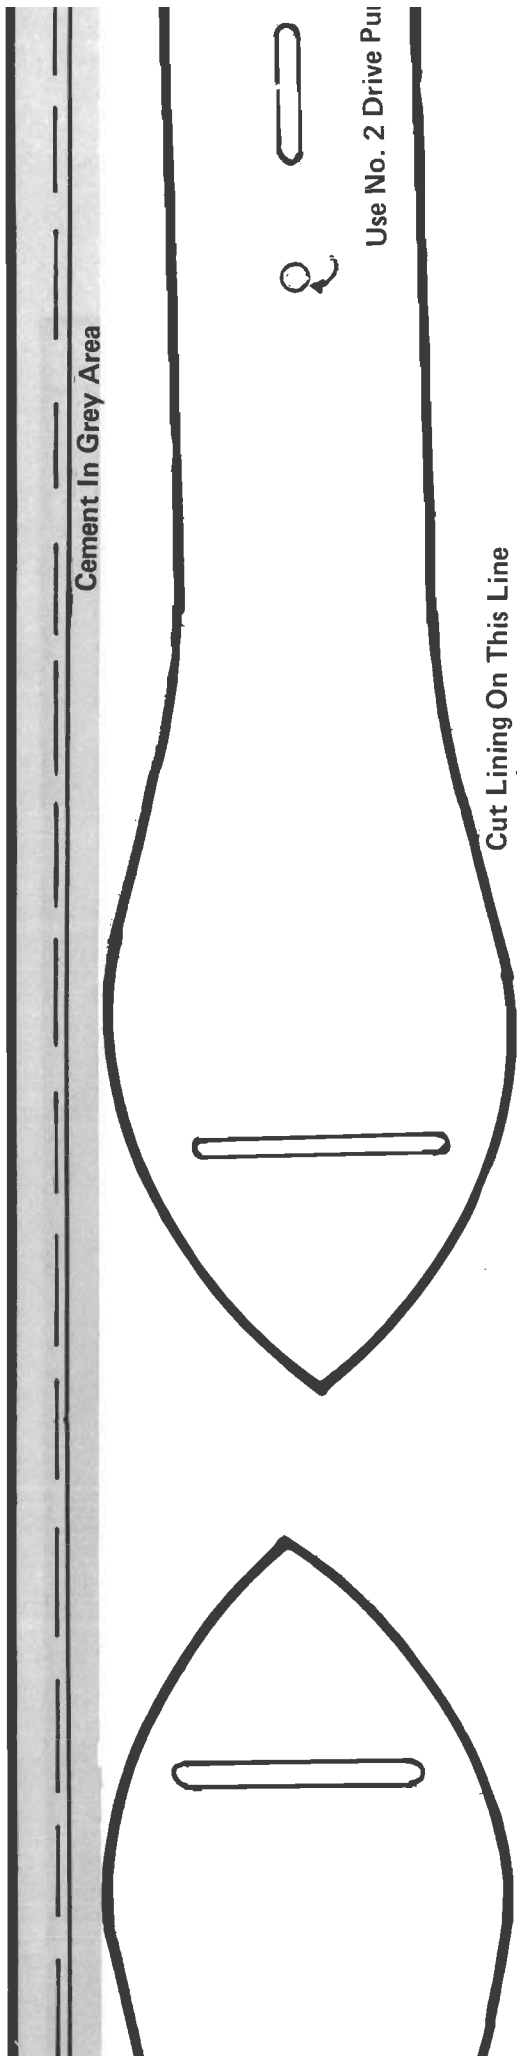

Cement In Grey Area

Cement In Grey Area

Use No. 2 Drive Punch

A diagram of a long, narrow rectangular strip of paper. A dashed line runs horizontally across the middle of the strip, labeled "Fold Line" with an arrow pointing to it. Another dashed line runs horizontally near the top edge of the strip, labeled "Cut Lining On This Line" with an arrow pointing to it. The strip is shaded light gray.



Glue In Gre

Fold Line

CONTOUR MAY BE USED ON BELTS 4–10

This pattern can be added to a belt by centering the point of contour in the center back of the belt (back of waist) and cutting pattern to include the contour.



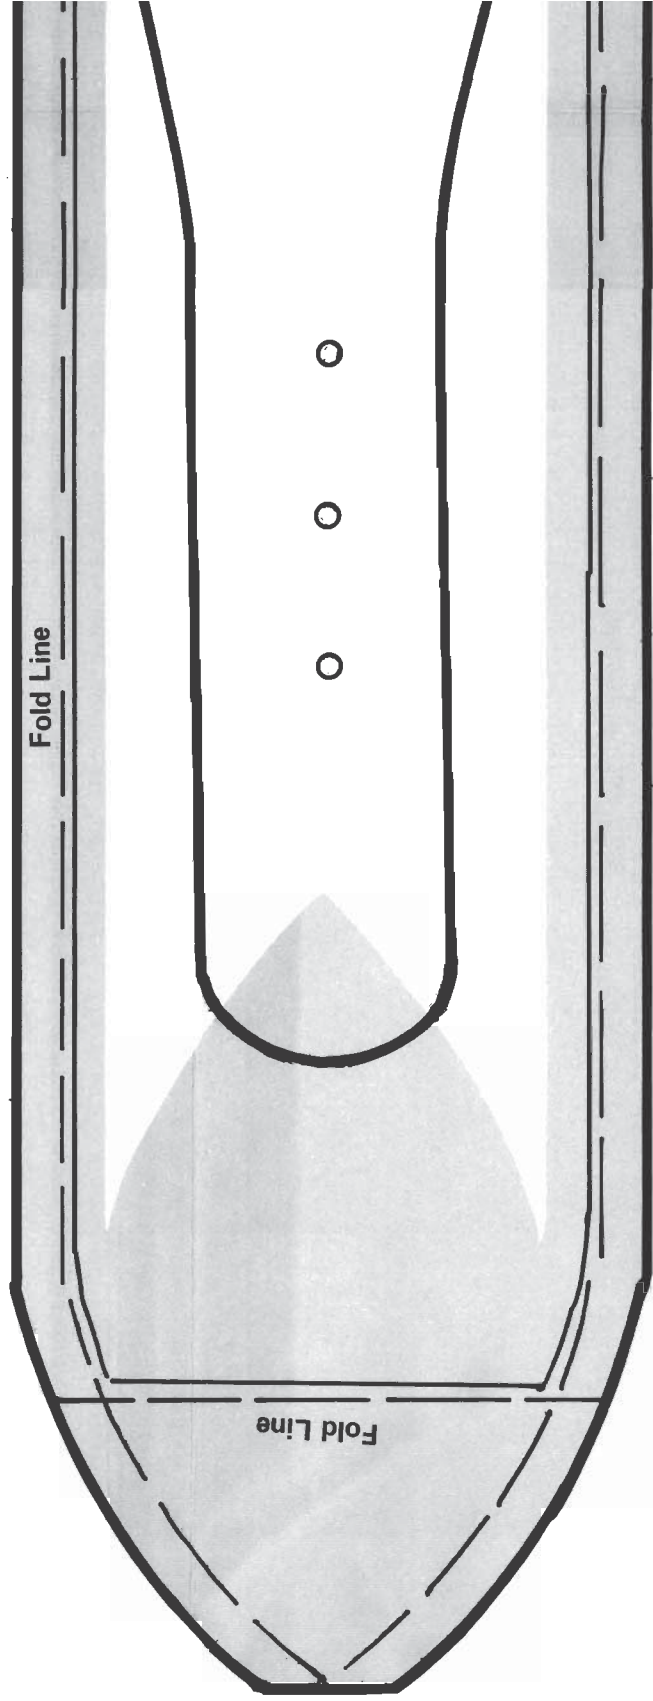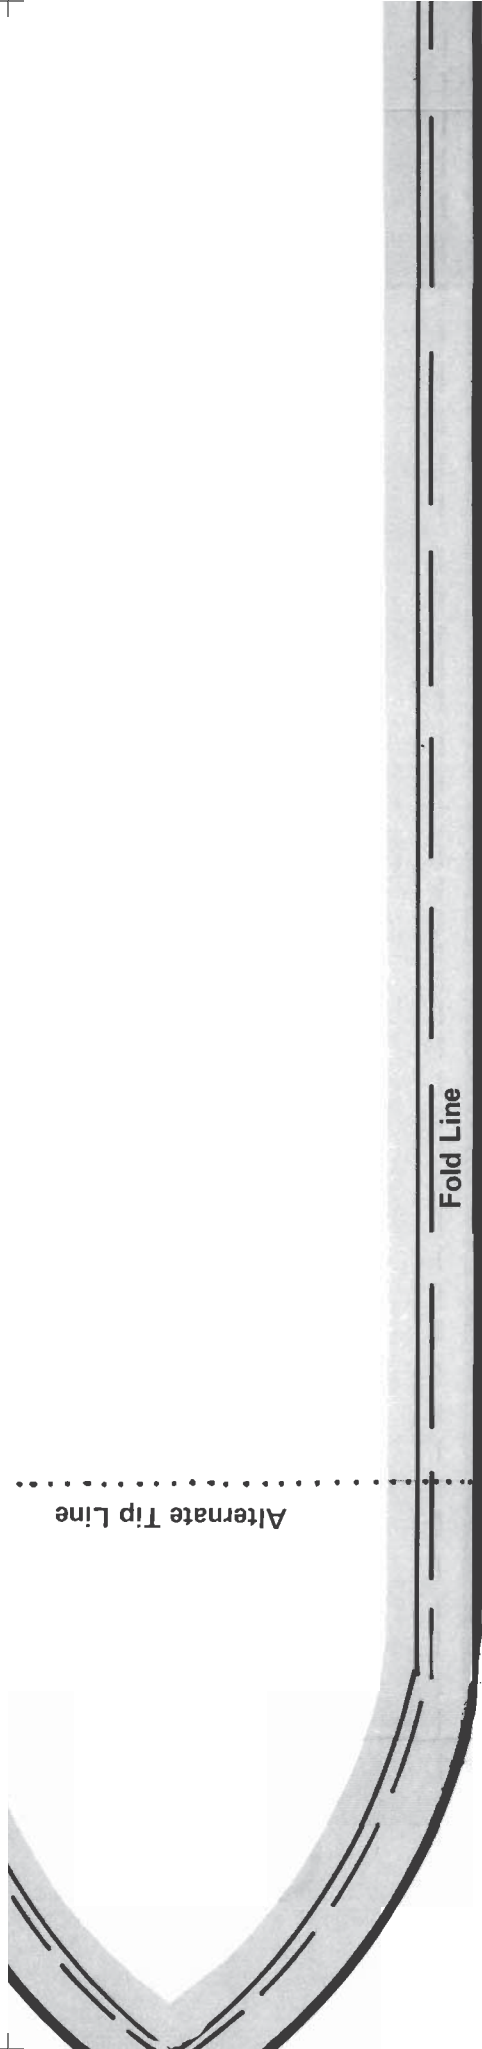


d line make




belt at fold
nd down on
punch holes
install rivet.

I line make

" wide and
fold down
secure.
I belt.

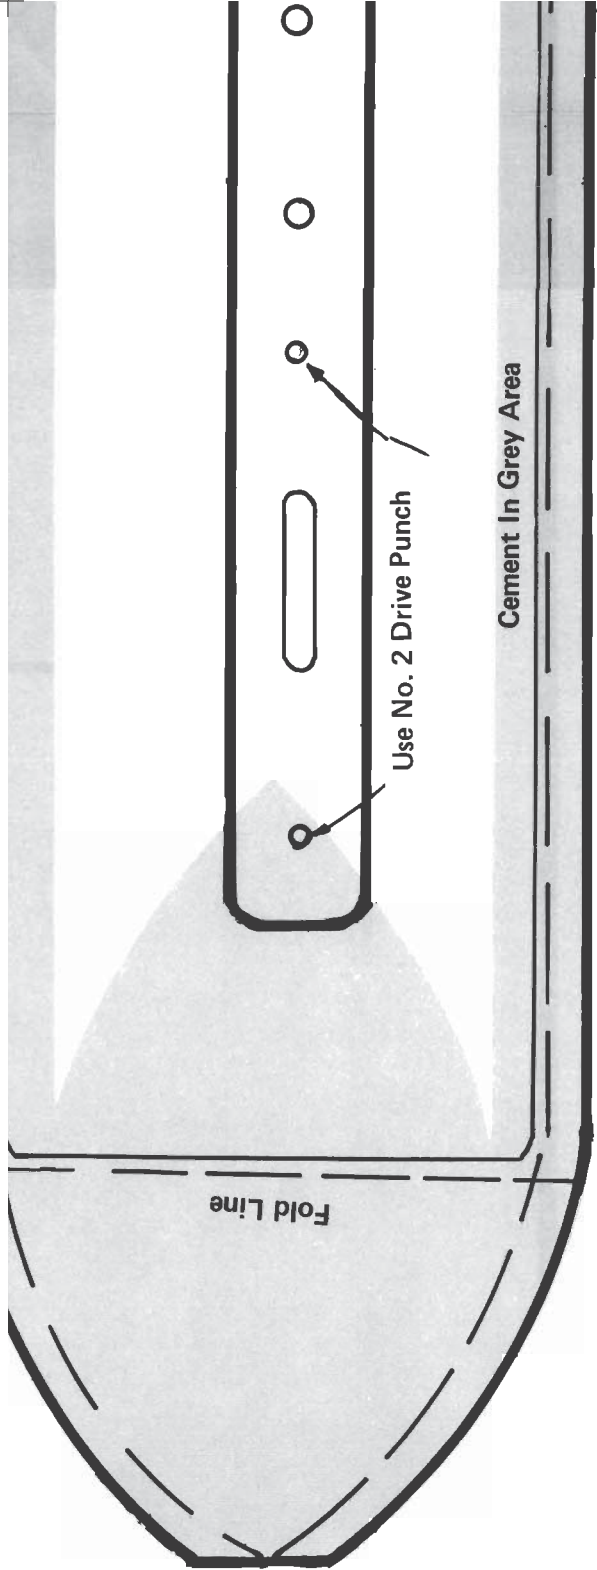

, aligning holes
of belt.
ther 1/2" wide
k side and fold
with mallet to
round the edges

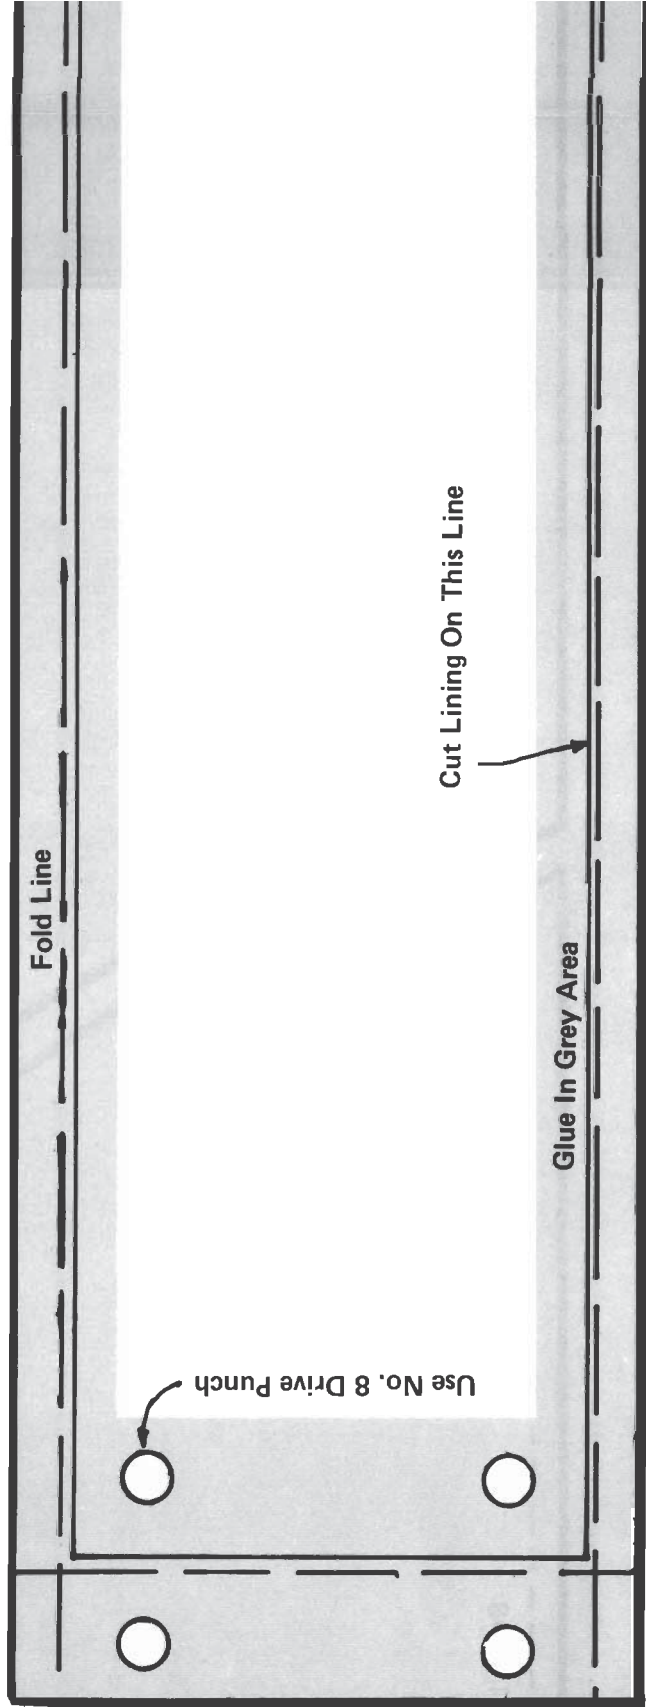

STOCK NO. 2699






BELT NUMBER 5

SIZING: From seam line to tip make pattern $1\frac{1}{2}$ of waist size plus 13".

YOU WILL NEED:
Leather
Cement

Follow instructions given for belt 3.

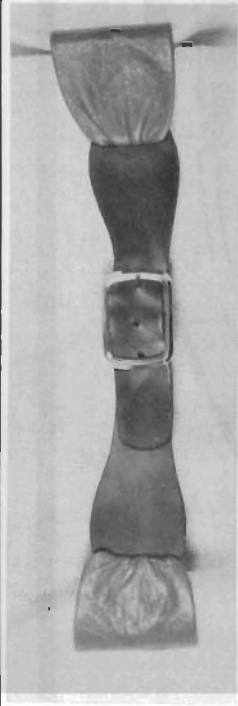

BELT NUMBER 6

SIZING: From end fold line to end fold line make pattern waist size minus $8\frac{3}{4}$ ".

YOU WILL NEED:
Leather
1 Buckle $1\frac{1}{4}$ "
1 Rivet
Cement



BELT NUMBER 7

SIZING: From end fold line to end fold line make pattern waist size minus 2".

YOU WILL NEED:
Leather
1 Braided Buckle 1"
Cement



BELT NUMBER 8

SIZING: From end fold line to end fold line make pattern waist size minus $6\frac{1}{2}$ ".

YOU WILL NEED:
Leather
2 Dee Rings $1\frac{1}{4}$ "

STEP 1. Trace pattern on to paper and cut out. If you wish to line this belt, trace along lines indicated on pattern.
STEP 2. Cut belt and lining out of desired leather.
STEP 3. If belt is to be lined, cement lining to back of belt now.
STEP 4. Apply cement to back of belt in areas indicated in grey on the pattern.
STEP 5. Fold edges over at fold lines and tap down with a mallet to secure.
STEP 6. Cut billet and buckle tab from 3-4 oz. leather. Punch holes and cut slots as indicated and dye desired color.
STEP 7. Attach buckle to buckle tab and install rivet.
STEP 8. Slip end of belt through slots in billet and buckle tab, fold ends over and cement to back side. Tap down to secure.
STEP 9. If you wish you may stitch around belt.

Follow steps 1-5 of belt 6.

STEP 6. Thread one end of belt through one side of buckle. Fold belt end over and cement to back of belt. Repeat on other end with other buckle side.
STEP 7. If you wish you may stitch around belt.



1 Buckle 1"
1 Rivet
Cement

Follow steps 1-5 of belt 6.
STEP 6. Place 1 1/4" dee ring on end of line and fold end through ring. Cement on reverse side of belt and tap down to secure.
STEP 7. Cut billet from 6-7 oz. leather. If as indicated and dye to match belt.
STEP 8. Attach buckle to belt and in Thread billet through dee rings.

BELT NUMBER 9



SIZING: From end fold line to end fold pattern waist size minus 3".

YOU WILL NEED:

Leather
2 Dee Rings 1 1/4"
Cement

Follow steps 1-6 of belt 8.

STEP 7. For tie, cut a strip of leather 1/2 30" long. Apply cement to back side and the center lengthwise. Tap with mallet to set.
STEP 8. If you wish you may stitch around

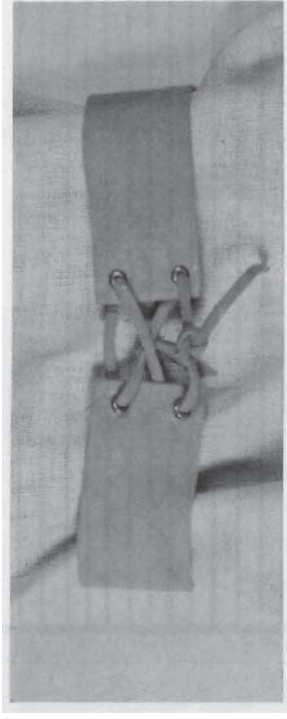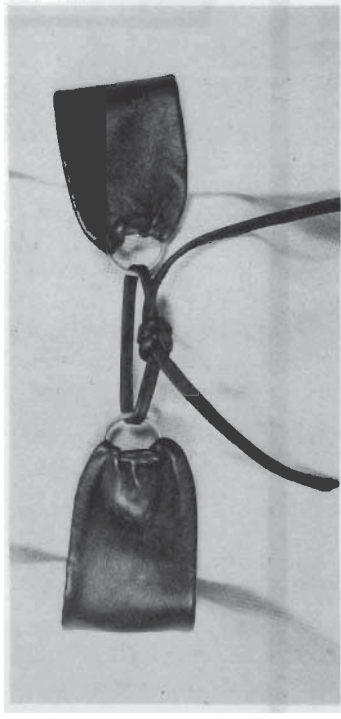

BELT NUMBER 10

SIZING: From end fold line to end fold line make pattern waist size minus 4".

YOU WILL NEED:

Leather
4 Eyelets
Cement

Follow steps 1 through 5 of belt 6.
STEP 6. Fold ends over at fold line and cement down to back of belt.
STEP 7. Install eyelets in holes in ends.
STEP 8. For tie, cut a strip of leather and 30" long. Apply cement to back down the center lengthwise. Tap adhere.
STEP 9. If you wish you may stitch a of the belt.