



## Doodle Page Digital Download

This PDF file contains 1 (one) Doodle Page. The PDF has been put together to give you options when it comes to printing. Pages and patterns that are larger than 8½x11 have been provided in two formats:



### 1) Full Size

If you would like to have a full size print out, take the full size pages to your local print shop and they can print it for you. All full size Doodle Pages are 11x17



### 2) Tiled

The tiled pages give you the option of printing the full sized Doodle Pages at home. You print the tiled pages and then assemble them to make the larger patterns.

The Doodle Page PDF files are typically laid out like this:

Front – full sized, front – tiled, back – full sized, back – tiled



(Some Doodle Pages do not have backs)

Please note: When printing on a home printer, the edges may get cut off. To avoid this, make sure “Page Scaling” is set to “Shrink to Printable Area” in the Adobe Reader print dialogue box. This will decrease the size of the Doodle Page a very small amount.




You may take this PDF file to your local print shop to have the full-size pages printed for your own personal use.



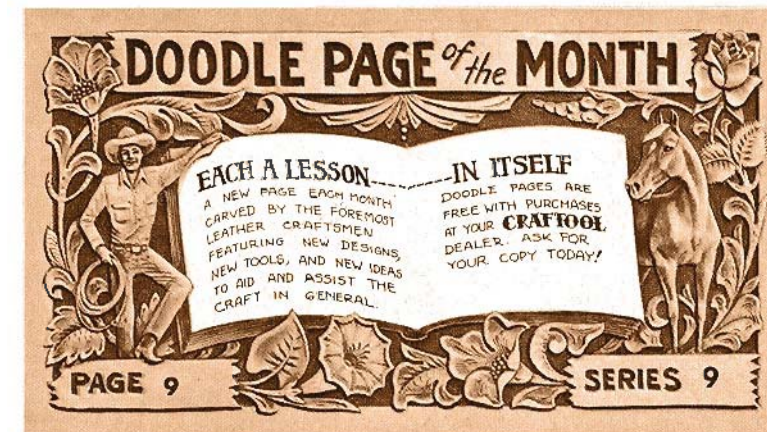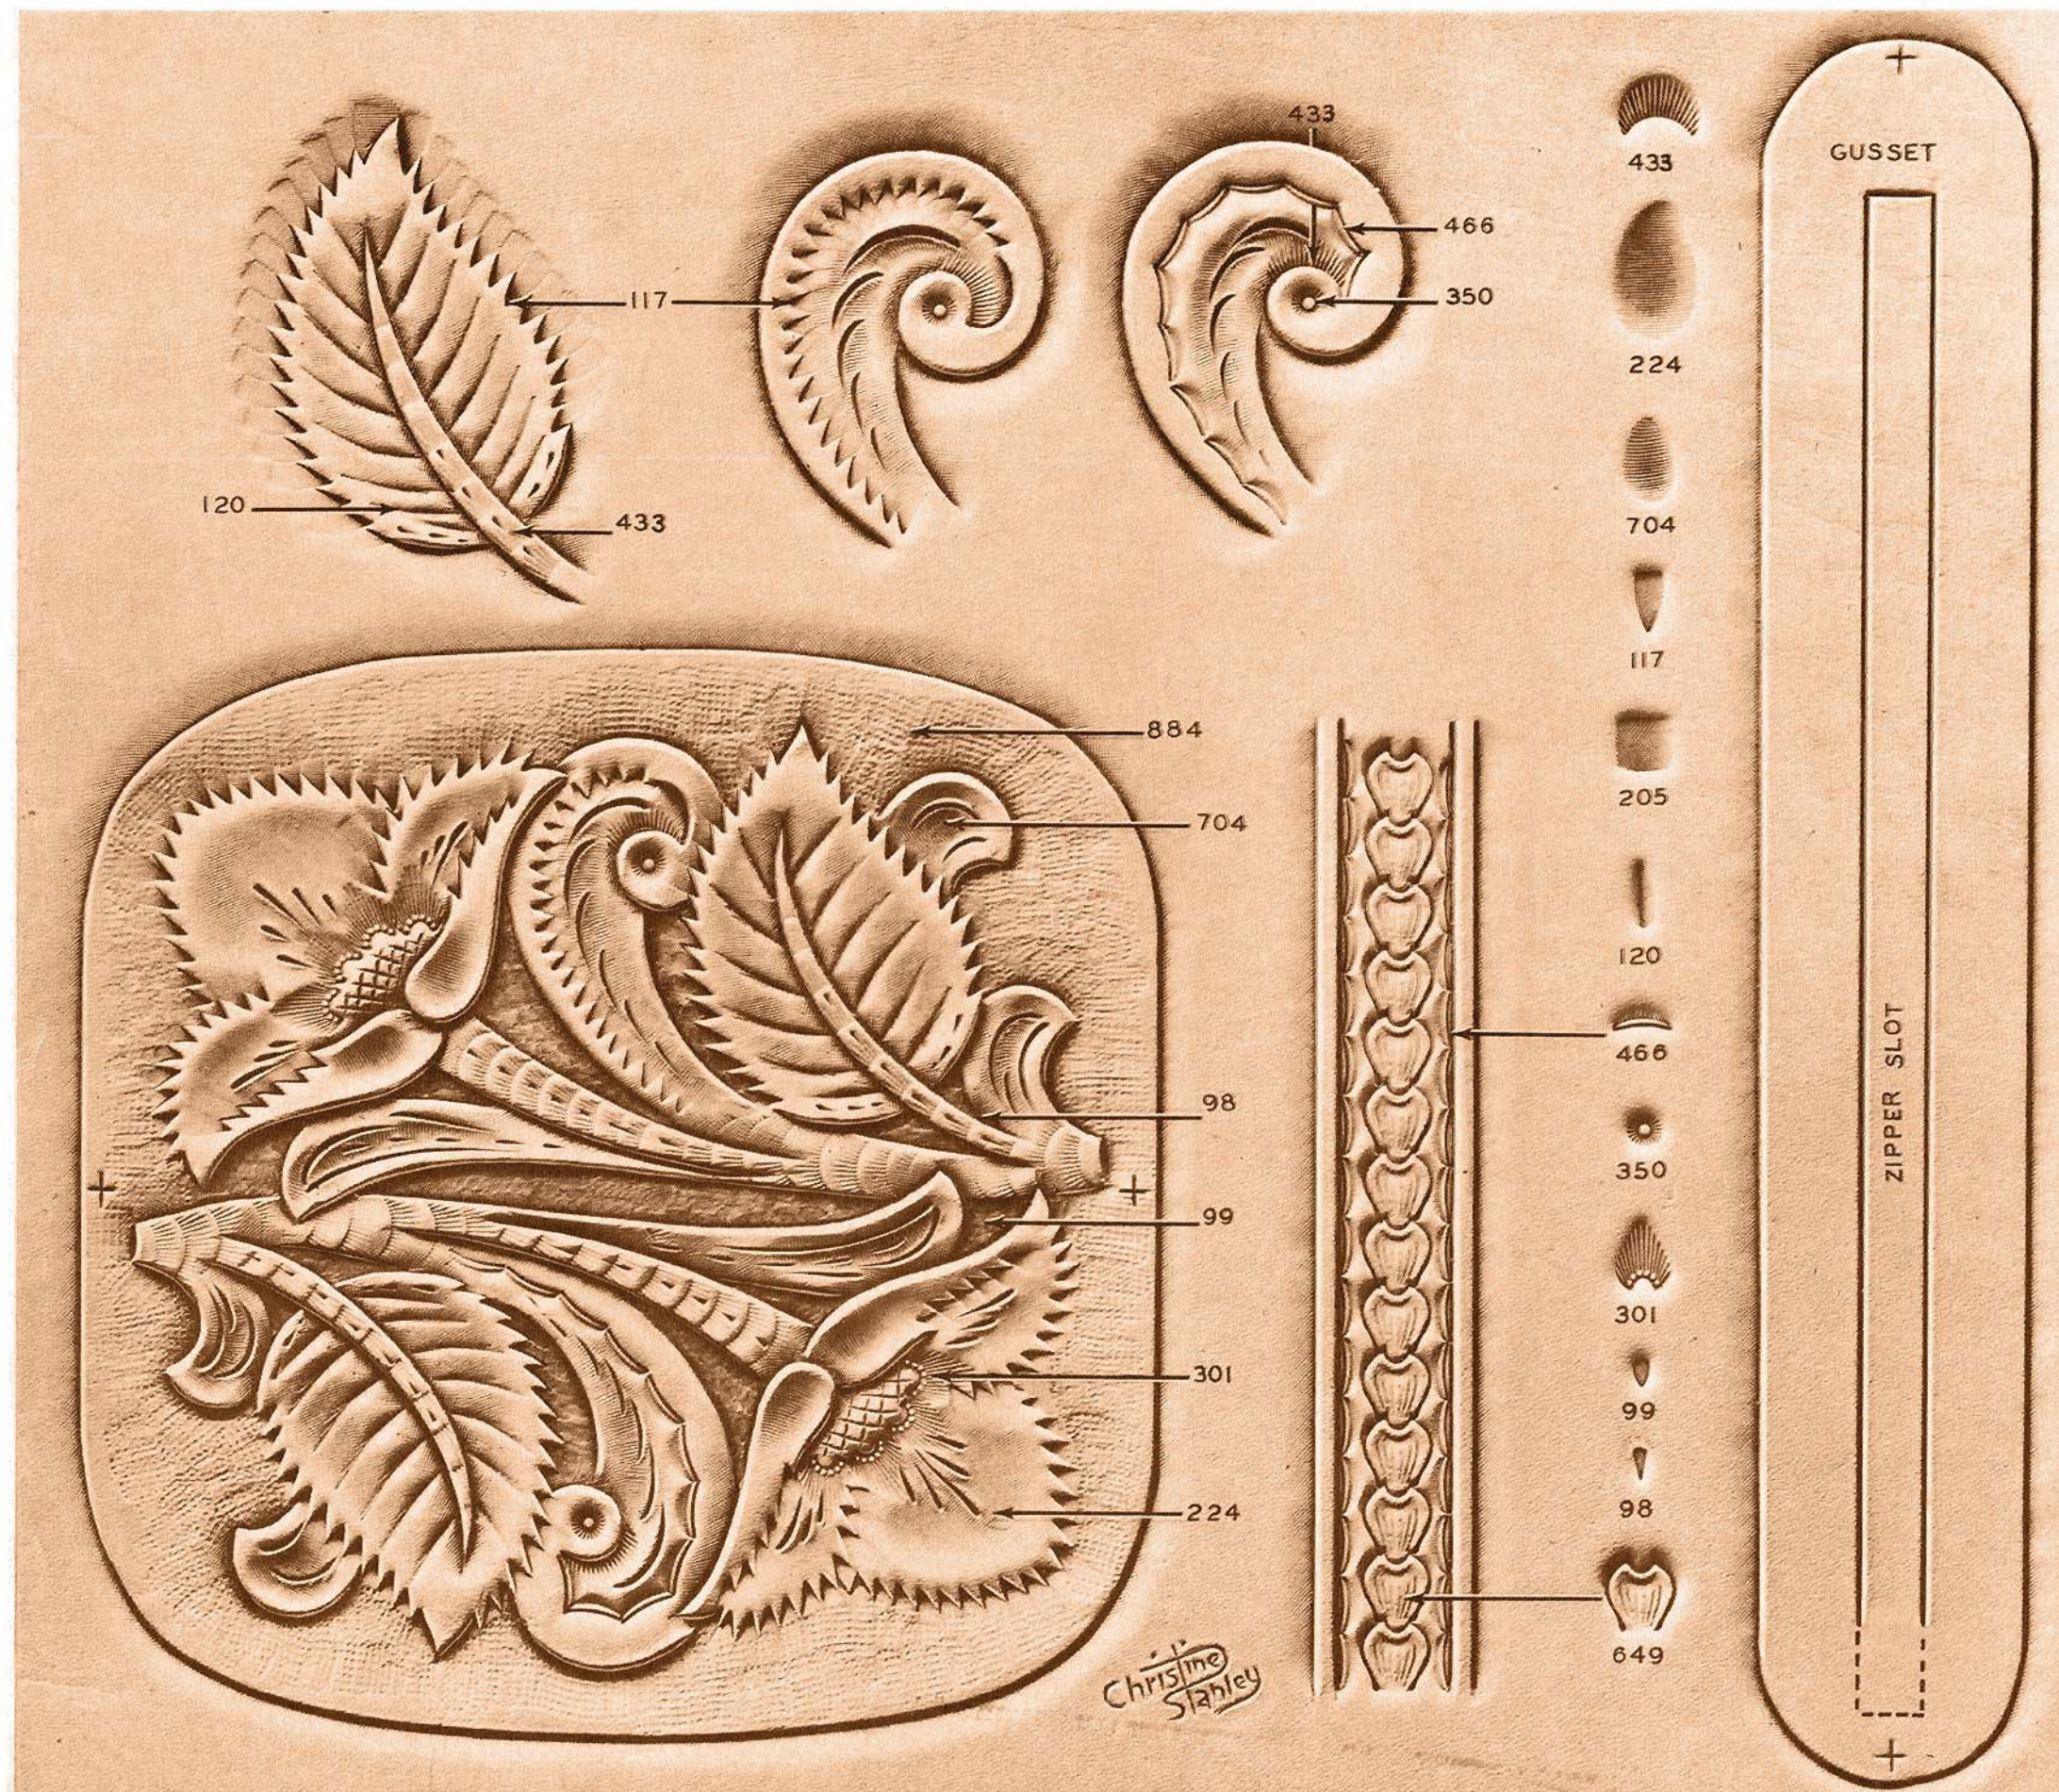


### ZIPPER BAG by Christine Stanley (Assembly Instructions)

1. Cut zipper slot in gusset. Do not cut dotted lines. Turn cut end of slot under and cement to flesh side of slot at dotted line. (see Fig. 1). This makes a small handle.

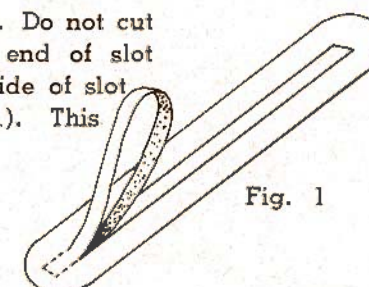

2. Sew zipper into slot.
3. Fold bag in half. Do not crease.

4. Match +'s on gusset to +'s on bag back and cement edges together. (see Fig. 2).

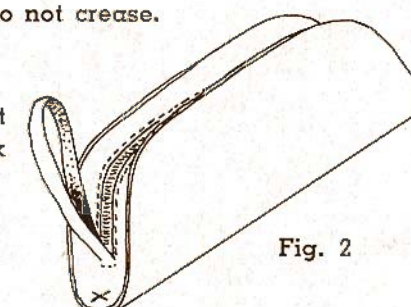


5. Punch lacing holes around edges of bag and lace. Use round punch for whip stitch or use thonging chisel for double loop lacing.





### ★★★ CRAFTOOL NEWS ★★★

The Craftool Company announces the all new "Ruby Blade"... This is a swivel knife blade that is ALWAYS SHARP!


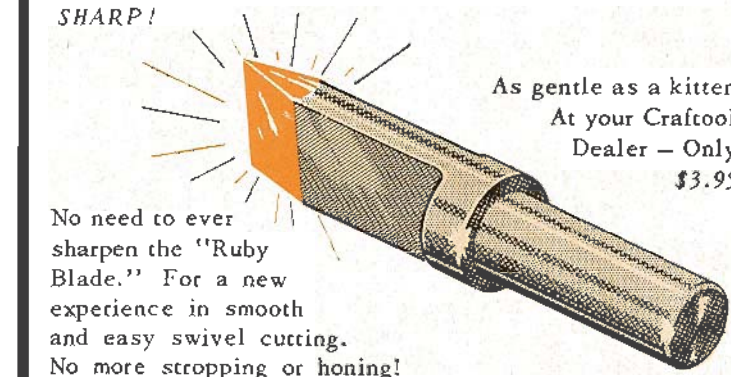




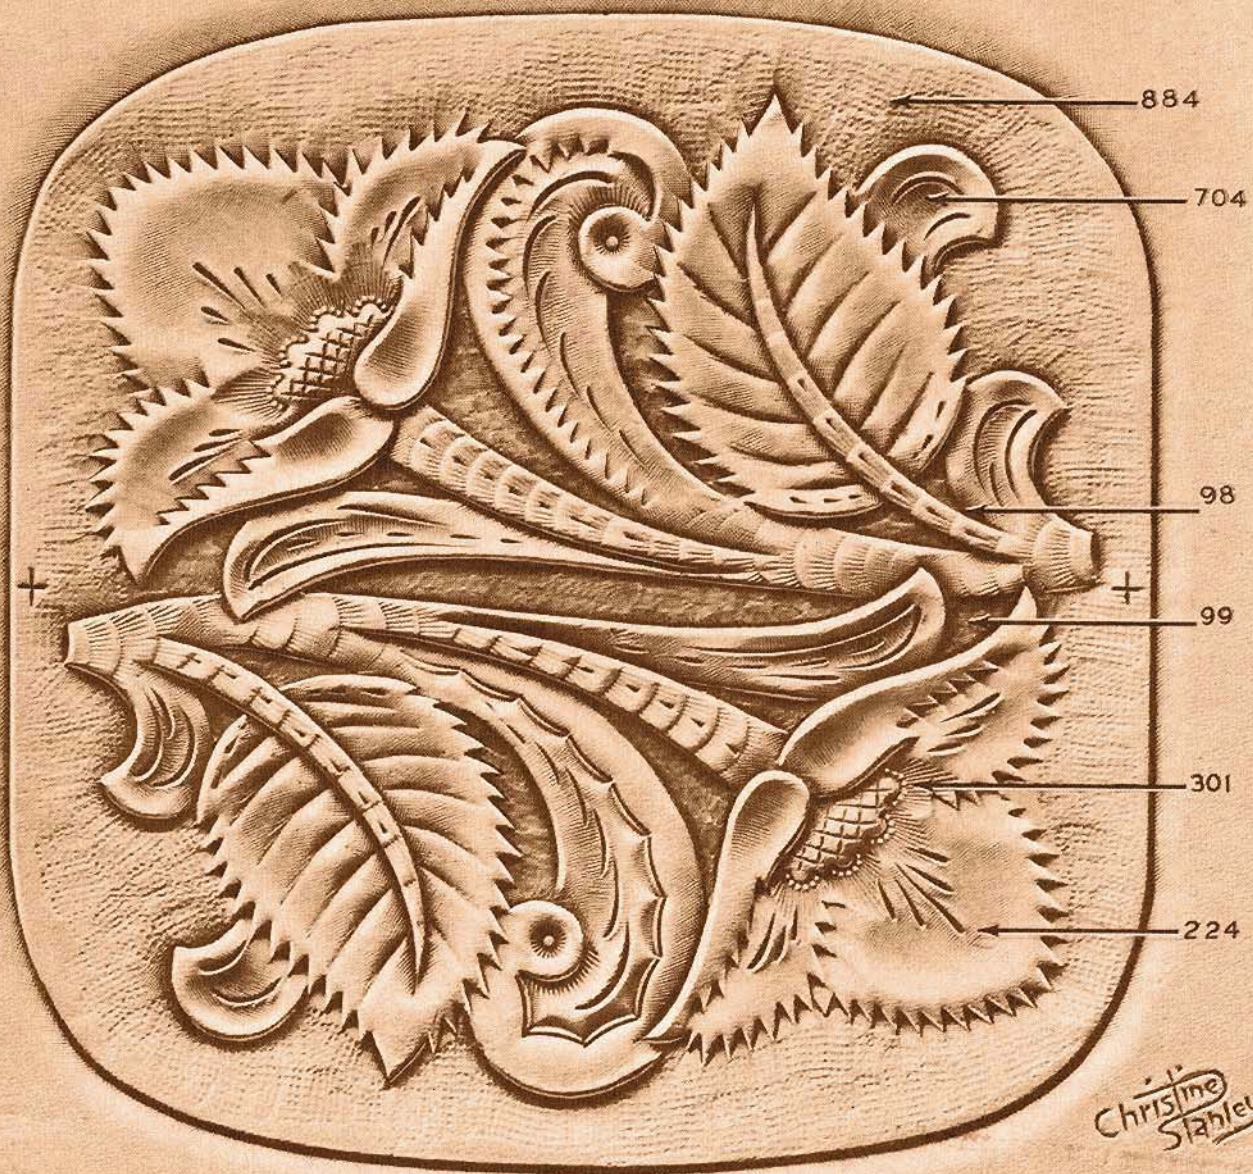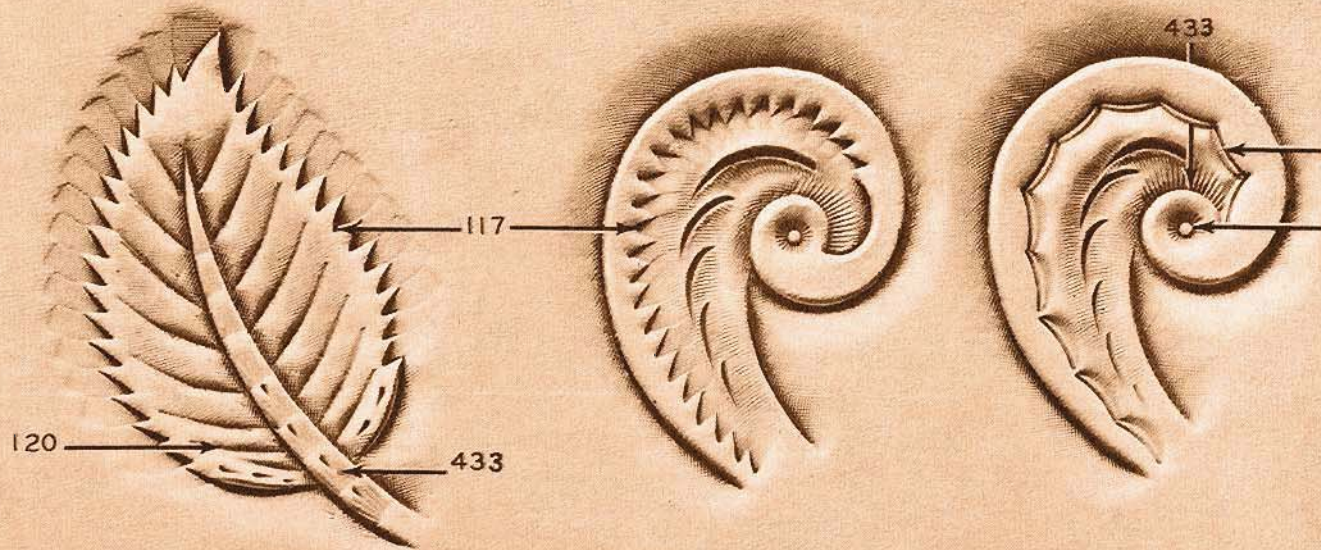

Christine Stanley



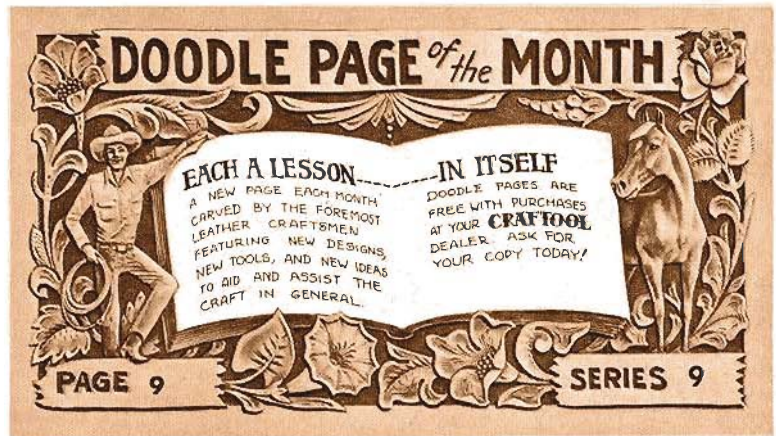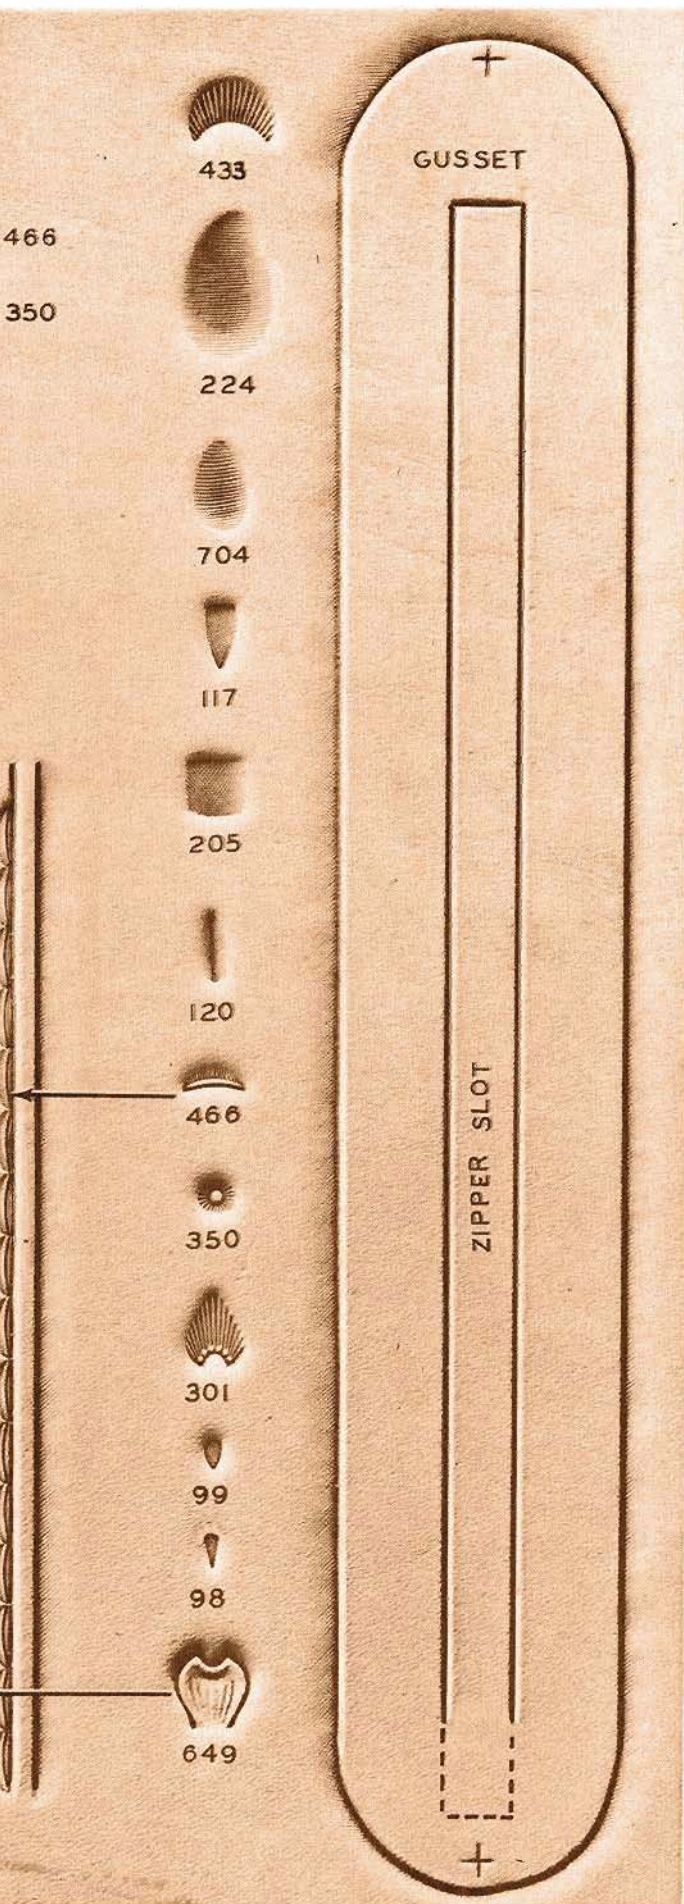

## ZIPPER BAG

by  
Christine Stanley  
(Assembly Instructions)

1. Cut zipper slot in gusset. Do not cut dotted lines. Turn cut end of slot under and cement to flesh side of slot at dotted line, (see Fig. 1). This makes a small handle.

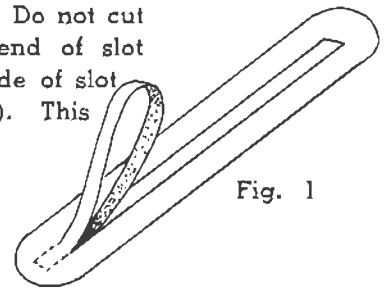


Fig. 1

2. Sew zipper into slot.

3. Fold bag in half. Do not crease.

4. Match +s on gusset to +s on bag back and cement edges together, (see Fig. 2).


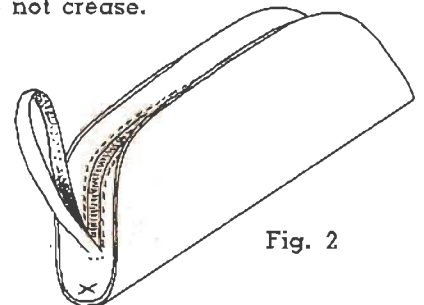



Fig. 2

5. Punch lacing holes around edges of bag and lace. Use round punch for whip stitch or use thonging chisel for double loop lacing.



## ★★★ CRAFTOOL NEWS ★★★

The Craftool Company announces the all new "Ruby Blade". . . This is a swivel knife blade that is *ALWAYS SHARP!*



As gentle as a kitten  
At your Craftool  
Dealer - Only  
\$3.95

No need to ever sharpen the "Ruby Blade." For a new experience in smooth and easy swivel cutting. No more stropping or honing!